

---

# Aequilibræ 1.4.1

**Pedro Camargo**

**May 23, 2025**



# CONTENTS

<b>1</b>	<b>Installation</b>	<b>1</b>
<b>2</b>	<b>The AequilibraE project</b>	<b>3</b>
<b>3</b>	<b>Run module</b>	<b>65</b>
<b>4</b>	<b>Network Manipulation</b>	<b>69</b>
<b>5</b>	<b>Distribution Procedures</b>	<b>95</b>
<b>6</b>	<b>Path Computation</b>	<b>111</b>
<b>7</b>	<b>Static Traffic Assignment</b>	<b>121</b>
<b>8</b>	<b>Public Transport</b>	<b>161</b>
<b>9</b>	<b>Route Choice</b>	<b>187</b>
<b>10</b>	<b>Other Applications</b>	<b>205</b>
<b>11</b>	<b>API Reference</b>	<b>211</b>
	<b>Python Module Index</b>	<b>293</b>
	<b>Index</b>	<b>295</b>



## INSTALLATION

In this section we describe how to install AequilibraE. The recommendations on this page are current as of September 2024.

### Important

Although AequilibraE is under intense development, we try to avoid making breaking changes to the API. In any case, you should check for new features and possible API changes often.

## 1.1 Installation

1. Install Python 3.9, 3.10, 3.11 or 3.12. We recommend Python 3.10 or 3.11
2. Install AequilibraE

```
pip install aequilibrae
```

### Python installations from the Windows store are NOT SUPPORTED

The Windows App Store ships a version of Python that contains an sqlite dll that does not support the loading of extensions. This means that Spatialite will not be loaded, and therefore AequilibraE will not work properly.

## 1.2 Dependencies

All of AequilibraE's dependencies are readily available from [PyPI](#) for all currently supported Python versions and major platforms.

### 1.2.1 Spatialite

Although the presence of Spatialite is rather ubiquitous in the GIS ecosystem, it has to be installed separately from Python or AequilibraE in any platform.

This [blog post](#) has a more comprehensive explanation of what is the setup you need to get Spatialite working, but that is superfluous if all you want is to get it working.

### Windows

#### Note

On Windows ONLY, AequilibraE automatically verifies if you have SpatiaLite installed in your system and downloads it to your temporary folder if you do not.

SpatiaLite does not have great support on Python for Windows. For this reason, it is necessary to download SpatiaLite for Windows and inform and load it to the Python SQLite driver every time you connect to the database.

One can download the appropriate version of the latest SpatiaLite release directly from its [project page](#) , or the cached versions on AequilibraE's website for [64-Bit Python](#)

After unpacking the zip file into its own folder (say `D:/spatialite`), one can *temporarily* add the SpatiaLite folder to system path environment variable, as follows:

```
import os
os.environ['PATH'] = 'D:/spatialite' + ';' + os.environ['PATH']
```

For a permanent recording of the SpatiaLite location on your system, please refer to the blog post referenced above or Windows-specific documentation.

### Ubuntu Linux

On Ubuntu it is possible to install SpatiaLite by simply using apt-get

```
sudo apt update -y
sudo apt install -y libsqlite3-mod-spatialite
sudo apt install -y libspatialite-dev
```

### MacOS

On MacOS one can use brew as per [this answer on Stack Overflow](#).

```
brew install libspatialite
```

## 1.3 Hardware requirements

AequilibraE's requirements depend heavily on the size of the model you are using for computation. The most important things to keep an eye on are:

- Number of zones on your model (size of the matrices you are dealing with)
- Number of matrices (vehicles classes (and user classes) you are dealing with)
- Number of links and nodes on your network (far less likely to create trouble)

Substantial testing has been done with large real-world models (up to 8,000 zones) and memory requirements did not exceed the traditional 32Gb found in most modeling computers these days. In most cases 16Gb of RAM is enough even for large models (5,000+ zones). Computationally intensive procedures such as skimming and traffic assignment have been parallelized, so AequilibraE can make use of as many CPUs as there are available in the system for such procedures.

## THE AEQUILIBRAE PROJECT

Similarly to commercial packages, any AequilibraE project must have a certain structure and follow a certain set of guidelines in order for software to work correctly.

One of these requirements is that AequilibraE currently only supports one projection system for all its layers, which is the **EPSG:4326** (WGS84). This limitation is planned to be lifted at some point, but it does not impact the result of any modeling procedure.

AequilibraE is built on the shoulder of much older and more established projects, such as [SQLite](#), [Spatialite](#) and [NumPy](#), as well as reasonably new industry standards such as the [OpenMatrix format](#).

Impressive performance, portability, self containment and open-source character of these pieces of software, along with their large user base and wide industry support make them solid options to be AequilibraE's data backend.

Since working with Spatialite is not just a matter of a `pip install`, please refer to [Dependencies](#). For QGIS users this is not a concern, while for Windows users this dependency is automatically handled under the hood, but the details are also discussed in the aforementioned dependencies section.

### 2.1 Package components: A conceptual view

As all the components of an AequilibraE model are based on open-source software and open-data standards, modeling with AequilibraE is a little different from modeling with commercial packages, as the user can read and manipulate model components outside the software modeling environments (Python and QGIS).

Thus, using/manipulating each one of an AequilibraE model components can be done in different ways depending on the tool you use for such.


It is then important to highlight that AequilibraE, as a software, is divided in three very distinctive layers. The first, which is responsible for tables consistent with each other (including links and nodes, modes and link\_types), are embedded in the data layer in the form of geo-spatial database triggers. The second is the Python API, which provides all of AequilibraE's core algorithms and data manipulation facilities. The third is the GUI implemented in QGIS, which provides a user-friendly interface to access the model, visualize results and run procedures.

These software layers are *stacked* and depend on each other, which means that any network editing done in SQLite, Python or QGIS will go through the Spatialite triggers, while any procedure such as traffic assignment done in QGIS is nothing more than an API call to the corresponding Python method.

### 2.2 Project structure

Since version 0.7, the AequilibraE project consists of a main folder, where a series of files and sub folders exist, and the current project organization is as follows:

# AequilibraE Project

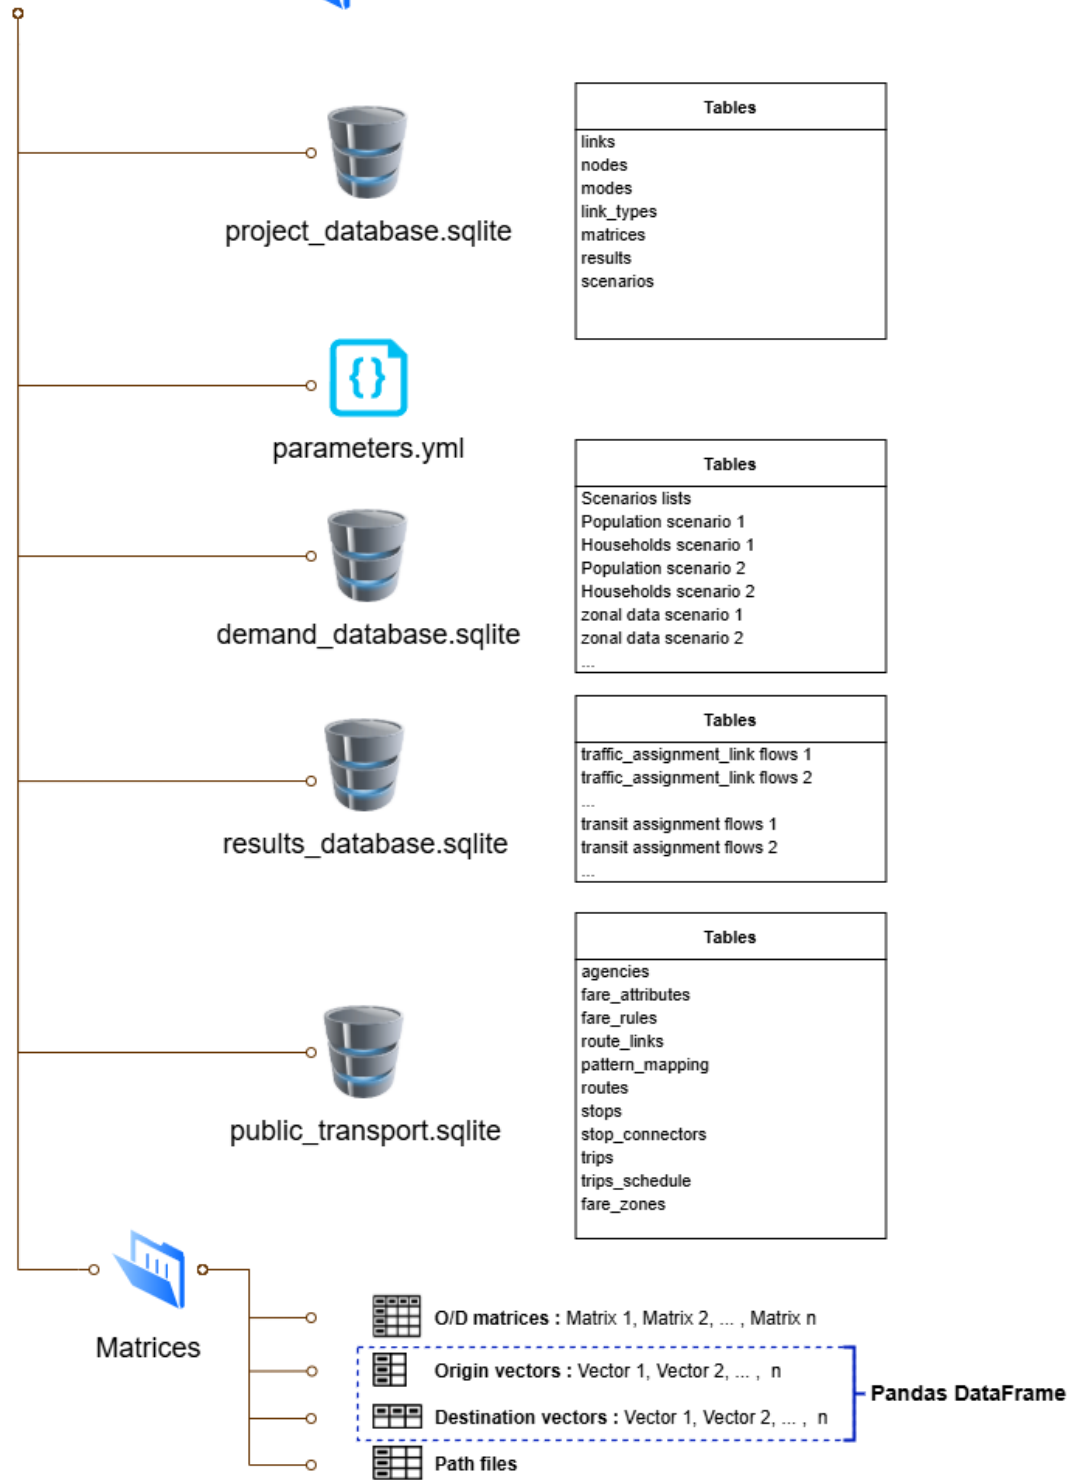

The main component of an AequilibraE model is the **project\_database.sqlite**, where the network and zoning system are stored and maintained, as well as the documentation records of all matrices and procedure results stored in other folders and databases.

The second key component of any model is the **parameters.yaml** file, which holds the default values for a number of procedures (e.g. assignment convergence), as well as the specification for networks imported from OpenStreetMap and other general import/export parameters.

The third and last required component of an AequilibraE model is the **Matrices folder**, where all the matrices in binary format (in AequilibraE's native AEM or OMX formats) should be placed. This folder can be empty, however, as no particular matrix is required to exist in an AequilibraE model.

The database that stores results in tabular format (e.g. link loads from traffic assignment), **results\_database.sqlite** is created on-the-fly the first time a command to save a tabular result into the model is invoked, so the user does not need to worry about its existence until it is automatically created.

The **demand\_database.sqlite** is envisioned to hold all the demand-related information, and it is not yet structured within the AequilibraE code, as there is no pre-defined demand model available for use with AequilibraE. This database is not created with the model, but we recommend using this concept on your demand models.

The **public\_transport.sqlite** database holds a transportation route system for a model, and has been introduced in AequilibraE version 0.9. This database is also created on-the-fly when the user imports a GTFS source into an AequilibraE model, but there is still no support for manually or programmatically adding routes to a route system as of yet.

In the following sections, we present the structure of each component of an AequilibraE project.

## 2.2.1 Project database

In this section we discuss on a nearly per-table basis the role of each table for an AequilibraE model. In the end, a more technical view of the *database structure*, including the SQL queries used to create each table and the indices used for each table are also available.

### Network

The objectives of developing a network format for AequilibraE are to provide the users a seamless integration between network data and transportation modeling algorithms and to allow users to easily edit such networks in any GIS platform they'd like, while ensuring consistency between network components, namely links and nodes. As the network is composed by two tables, **links** and **nodes**, maintaining this consistency is not a trivial task.

As mentioned in other sections of this documentation, the links and a nodes layers are kept consistent with each other through the use of database triggers, and the network can therefore be edited in any GIS platform or programmatically in any fashion, as these triggers will ensure that the two layers are kept compatible with each other by either making other changes to the layers or preventing the changes.

**We cannot stress enough how impactful this set of spatial triggers was to the transportation modeling practice, as this is the first time a transportation network can be edited without specialized software that requires the editing to be done inside such software.**

#### Important

AequilibraE does not currently support turn penalties and/or bans. Their implementation requires a complete overhaul of the path-building code, so that is still a long-term goal, barred specific development efforts.

#### See also

- *links table structure*  
Data model
- *nodes table structure*  
Data model

### Modes table

The **modes** table exists to list all the modes available in the model's network, and its main role is to support the creation of graphs directly from the SQLite project.

#### Important

Modes must have a unique mode\_id composed of a single letter, which is case-sensitive to a total of 52 possible modes in the model.

As described in the SQL data model, all AequilibraE models are created with 4 standard modes, which can be added to or removed by the user, and would look like the following.

The screenshot shows a window titled "DB Browser for SQLite - D:\release\Sample models\Chicago\_M...". The interface includes a menu bar (File, Edit, View, Tools, Help), a toolbar with "New Database", "Open Project", and "Attach Database", and a tabbed view with "Database Structure", "Browse Data", "Edit Pragmas", and "Execute SQL". The "Browse Data" tab is active, showing a table named "modes". The table has the following structure and data:

	mode_name	mode_id	description	vot	pce
	Filter	Filter	Filter	Filter	Filter
1	car	c	Passenger vehicles	0.04	1
2	motorcycle	M	Motorcycles	0.002	0.2
3	Trucks	T	All trucks	0.4	2.5

At the bottom of the window, there are navigation buttons (first, previous, next, last) and a "Go to:" field with the value "1". The encoding is set to "UTF-8".

### Consistency triggers

As it happens with the links and nodes tables, the modes table is kept consistent with the links table through the use of database triggers.

## Changing the modes allowed in a certain link

Whenever we change the modes allowed on a link, we need to check for two conditions:

- At least one mode is allowed on that link
- All modes allowed on that link exist in the modes table

For each condition, a specific trigger was built, and if any of the checks fails, the transaction will fail.

Having successfully changed the modes allowed in a link, we need to update the modes that are accessible to each of the nodes which are the extremities of this link. For this purpose, a further trigger is created to update the modes field in the nodes table for both of the link's a\_node and b\_node.

## Directly changing the modes field in the nodes table

A trigger guarantees that the value being inserted in the field is according to the values found in the associated links' modes field. If the user attempts to overwrite this value, it will automatically be set back to the appropriate value.

## Adding a new link

The exact same behaviour as for *Changing the modes allowed in a certain link* applies in this case, but it requires specific new triggers on the **creation** of the link.

## Editing a mode in the modes table

Whenever we want to edit a mode in the modes table, we need to check for two conditions:

- The new mode\_id is exactly one character long
- The old mode\_id is not still in use on the network

For each condition, a specific trigger was built, and if any of the checks fails, the transaction will fail.

The requirements for uniqueness and non-absent values are guaranteed during the construction of the modes table by using the keys **UNIQUE** and **NOT NULL**.

## Adding a new mode to the modes table

In this case, only the first behaviour mentioned above on *Editing a mode in the modes table* applies, the verification that the mode\_id is exactly one character long. Therefore only one new trigger is required.

## Removing a mode from the modes table

In counterpoint, only the second behaviour mentioned above on *Editing a mode in the modes table* applies in this case, the verification that the old 'mode\_id' is not still in use by the network. Therefore only one new trigger is required.

### See also

- [aequilibrae.project.network.Modes \(\)](#)  
Class documentation
- [modes table structure](#)  
Data model

## Link types table

The **link\_types** table exists to list all the link types available in the model's network, and its main role is to support processes such as adding centroids and centroid connectors, and to store reference data like default lane capacity for each link type.

## Reserved values

There are two default link types in the link\_types table and that cannot be removed from the model without breaking it.

- **centroid\_connector** - These are **VIRTUAL** links added to the network with the sole purpose of loading demand/traffic onto the network. The identifying letter for this mode is **z**.
- **default** - This link type exists to facilitate the creation of networks when link types are irrelevant. The identifying letter for this mode is **y**. That is right, you have from **a** to **x** to create your own link types, as well as all upper-case letters of the alphabet.

## Adding new link types to a project

Adding link types to a project can be done through the Python API or directly into the 'link\_types' table, which could look like the following.

	link_type	link_type_id	description	lanes	lane_capacity	speed
	Filter	Filter	Filter	Filter	Filter	Filter
1	centroid_connector	z	VIRTUAL centroid connectors only	10	10000	NULL
2	default	y	Default general link type	2	900	NULL
3	residential	r	Link types from Open Street Maps: ...	NULL	NULL	NULL
4	service	s	Link types from Open Street Maps: ...	NULL	NULL	NULL
5	trunk	t	Link types from Open Street Maps: tru...	NULL	NULL	NULL
6	unclassified	u	Link types from Open Street Maps: ...	NULL	NULL	NULL
7	secondary	S	Link types from Open Street Maps: ...	NULL	NULL	NULL
8	footway	f	Link types from Open Street Maps: ...	NULL	NULL	NULL
9	path	p	Link types from Open Street Maps: path	NULL	NULL	NULL
10	primary	P	Link types from Open Street Maps: ...	NULL	NULL	NULL
11	track	T	Link types from Open Street Maps: track	NULL	NULL	NULL
12	tertiary	a	Link types from Open Street Maps: ...	NULL	NULL	NULL
13	pedestrian	b	Link types from Open Street Maps: ...	NULL	NULL	NULL
14	rest_area	R	Link types from Open Street Maps: ...	NULL	NULL	NULL

**Note**

Both 'link\_type' and 'link\_type\_id' MUST be unique

**Consistency triggers**

As it happens with the links and nodes tables, the 'link\_types' table is kept consistent with the links table through the use of database triggers.

**Changes to reserved link\_types**

For both link types mentioned about (**y** & **z**), changes to the 'link\_type' and 'link\_type\_id' fields, as well as the removal of any of these records are blocked by database triggers, as to ensure that there is always one generic physical link type and one virtual link type present in the model.

**Changing the link type for a certain link**

Whenever we change the 'link\_type' associated to a link, we need to check whether that link type exists in the links\_table.

This condition is ensured by specific trigger checking whether the new 'link\_type' exists in the link table. If it does not, the transaction will fail.

We also need to update the 'link\_types' field the nodes connected to the link with a new string of all the different 'link\_type\_id's connected to them.

**Adding a new link**

The exact same behaviour as for *Changing the link type for a certain link* applies in this case, but it requires a specific trigger on the **creation** of the link.

**Editing a link type in the *link\_types* table**

Whenever we want to edit a 'link\_type' in the 'link\_types' table, we need to check for two conditions:

- The new 'link\_type\_id' is exactly one character long
- The old 'link\_type' is not in use on the network

For each condition, a specific trigger was built, and if any of the checks fails, the transaction will fail.

The requirements for uniqueness and non-absent values are guaranteed during the construction of the 'link\_types' table by using the keys **UNIQUE** and **NOT NULL**.

**Adding a new link type to the *link\_types* table**

In this case, only the first behaviour mentioned above on *Editing a link type in the link\_types table* applies, the verification that the 'link\_type\_id' is exactly one character long. Therefore only one new trigger is required.

**Removing a link type from the *link\_types* table**

In counterpoint, only the second behaviour mentioned above on *Editing a link type in the link\_types table* applies in this case, the verification that the old 'link\_type' is not still in use by the network. Therefore only one new trigger is required.

**See also**

- [aequilibrae.project.network.LinkTypes\(\)](#)  
Class documentation
- [link types table structure](#)  
Data model

### Zones table

The default **zones** table has a **MultiPolygon** geometry type and a limited number of fields, as most of the data is expected to be in the **demand\_database.sqlite**.

The API for manipulation of the zones table and each one of its records is consistent with what exists to manipulate the other fields in the database.

As it happens with links and nodes, zones also have geometries associated with them, and in this case they are of the type .

You can check [this example](#) to learn how to add zones to your project.


### See also

- [aequilibrae.project.Zone\(\)](#)  
Class documentation
- [zones table structure](#)  
Data model

### Matrices table

The **matrices** table in the project\_database is nothing more than an index of all matrix files contained in the matrices folder inside the AequibraE project.

This index, which looks like below, has two main columns. The first one is the **file\_name**, which contains the actual file name in disk as to allow AequibraE to find the file, and **name**, which is the name by which the user should refer to the matrix in order to access it through the API.

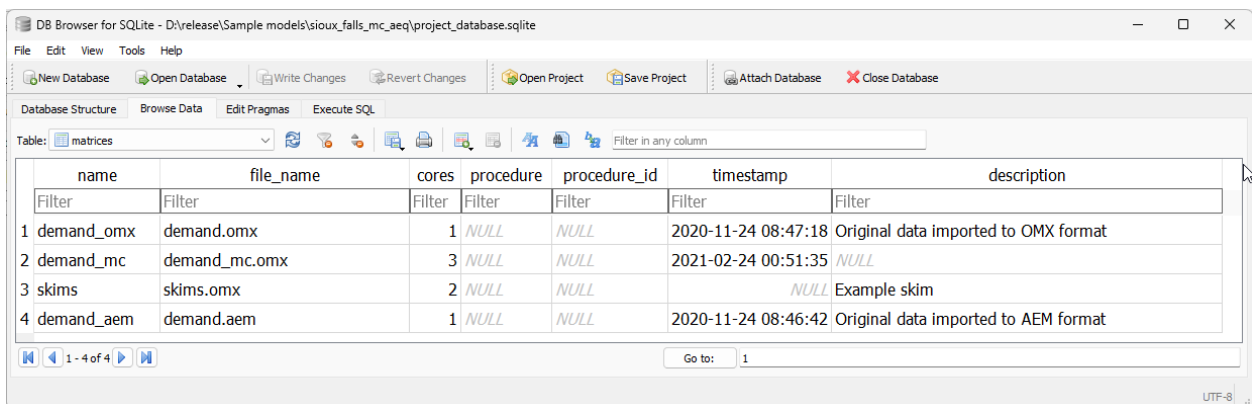

	name	file_name	cores	procedure	procedure_id	timestamp	description
1	demand_omx	demand.omx	1	NULL	NULL	2020-11-24 08:47:18	Original data imported to OMX format
2	demand_mc	demand_mc.omx	3	NULL	NULL	2021-02-24 00:51:35	NULL
3	skims	skims.omx	2	NULL	NULL	NULL	Example skim
4	demand_aem	demand.aem	1	NULL	NULL	2020-11-24 08:46:42	Original data imported to AEM format

As AequibraE is fully compatible with OMX, the index can have a mix of matrix types (AEM and OMX) without prejudice to functionality.

### See also

- *aequilibrae.project.Matrices()*  
Class documentation
- *matrices table structure*  
Data model

### About table

The **about** table is the simplest of all tables in the AequilibraE project, but it is the one table that contains the documentation about the project, and it is therefore crucial for project management and quality assurance during modeling projects.

It is possible to create new information fields programmatically. Once the new field is added, the underlying database is altered and the field will be present when the project is open during future use.

This table, which can look something like the example from image below, is required to exist in AequilibraE but it is not currently actively used by any process. We strongly recommend not to edit the information on **projection** and **aequilibrae\_version**, as these are fields that might or might not be used by the software to produce valuable information to the user with regards to opportunities for version upgrades.

The screenshot shows the DB Browser for SQLite interface. The title bar indicates the database file is 'C:\Users\pcamargo\Downloads\Freetown\project\_database.sqlite'. The menu bar includes File, Edit, View, Tools, and Help. The toolbar contains buttons for New Database, Open Database, Write Changes, Open Project, and Attach Database. The main window has tabs for Database Structure, Browse Data, Edit Pragmas, and Execute SQL. The 'Table:' dropdown is set to 'about'. The table structure is displayed with columns 'infoname' and 'infovalue'. The data is as follows:

	infoname	infovalue
	Filter	Filter
1	model_name	Western Area, Sierra Leone
2	region	Freetown metropolitan area, Sierra Leone
3	description	
4	author	Outer Loop Consulting
5	year	2023
6	scenario_description	Base case. Full OSM network
7	model_version	NULL
8	project_id	NULL
9	aequilibrae_version	0.8.3
10	projection	4326
11	driving_side	right
12	license	OSM network. Refer to their license
13	scenario_name	base_case
14	country_name	Sierra Leone
15	country_code	SLE

At the bottom of the table view, there are navigation buttons and a 'Go to:' field set to '1'. The status bar at the bottom right shows 'UTF-8'.


#### See also

- [aequilibrae.project.About\(\)](#)  
Class documentation
- [about table structure](#)  
Data model

## Project attributes

Documentation is paramount for any successful modeling project. For this reason, AequilbraE has a database table dedicated to the documentation of each field in each of the other tables in the project. This table, called **attributes\_documentation** can be accessed directly through SQL, but it is envisaged that its editing and consultation would happen through the Python API itself.

As a simple table, it looks as follows:

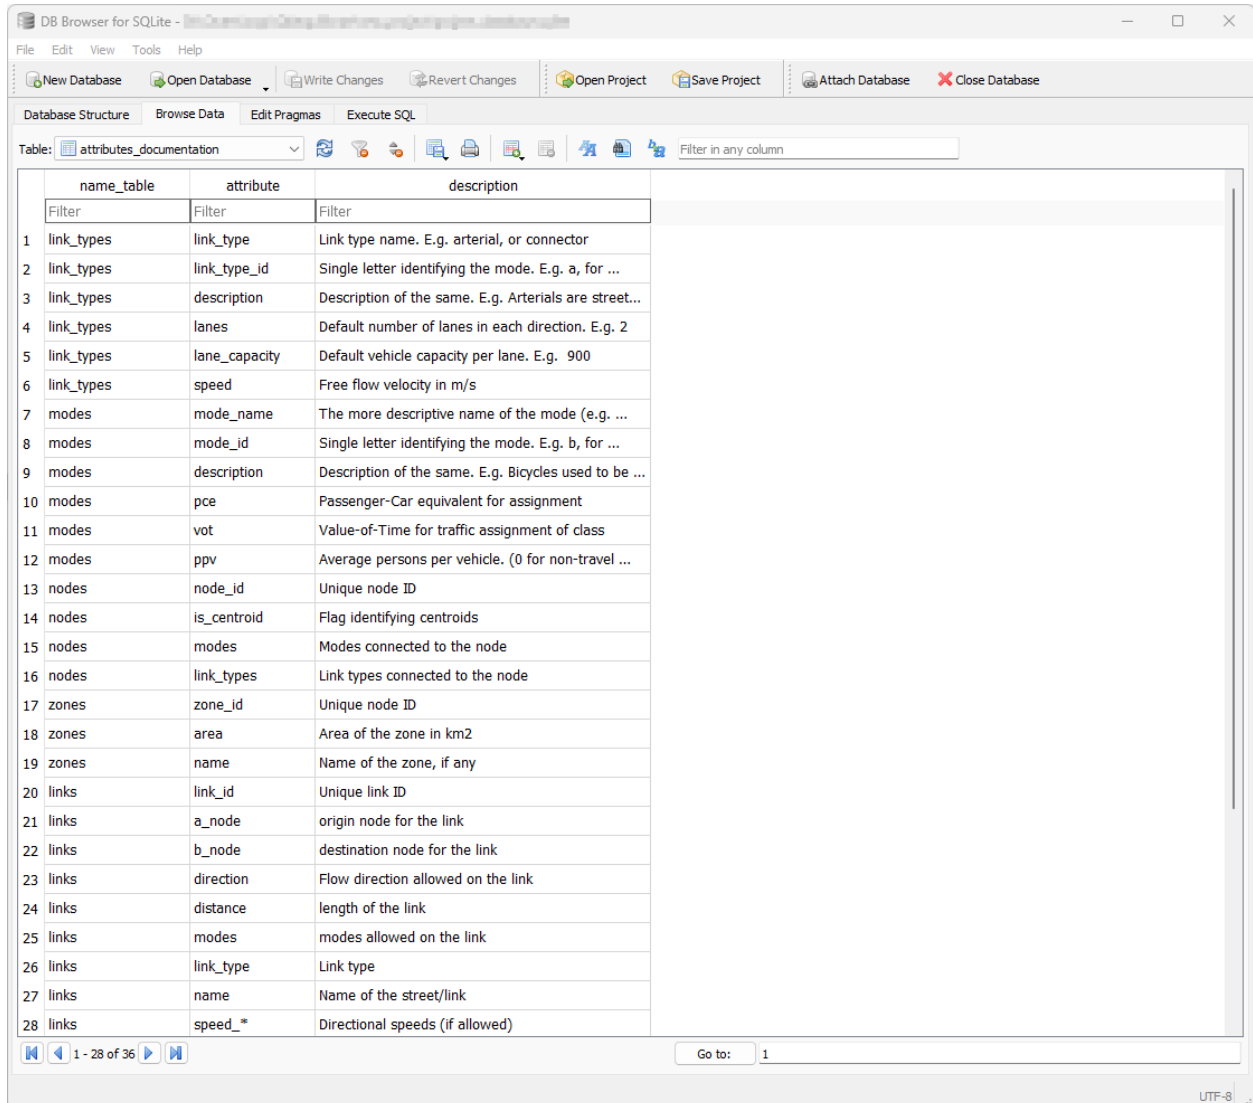

	name_table	attribute	description
	Filter	Filter	Filter
1	link_types	link_type	Link type name. E.g. arterial, or connector
2	link_types	link_type_id	Single letter identifying the mode. E.g. a, for ...
3	link_types	description	Description of the same. E.g. Arterials are street...
4	link_types	lanes	Default number of lanes in each direction. E.g. 2
5	link_types	lane_capacity	Default vehicle capacity per lane. E.g. 900
6	link_types	speed	Free flow velocity in m/s
7	modes	mode_name	The more descriptive name of the mode (e.g. ...
8	modes	mode_id	Single letter identifying the mode. E.g. b, for ...
9	modes	description	Description of the same. E.g. Bicycles used to be ...
10	modes	pce	Passenger-Car equivalent for assignment
11	modes	vot	Value-of-Time for traffic assignment of class
12	modes	ppv	Average persons per vehicle. (0 for non-travel ...
13	nodes	node_id	Unique node ID
14	nodes	is_centroid	Flag identifying centroids
15	nodes	modes	Modes connected to the node
16	nodes	link_types	Link types connected to the node
17	zones	zone_id	Unique node ID
18	zones	area	Area of the zone in km2
19	zones	name	Name of the zone, if any
20	links	link_id	Unique link ID
21	links	a_node	origin node for the link
22	links	b_node	destination node for the link
23	links	direction	Flow direction allowed on the link
24	links	distance	length of the link
25	links	modes	modes allowed on the link
26	links	link_type	Link type
27	links	name	Name of the street/link
28	links	speed_*	Directional speeds (if allowed)

### See also


- [attributes documentation table structure](#)  
Data model

## Results table

The **results** table exists to hold the metadata for the results stored in the **results\_database.sqlite** in the same folder as the model database. In that, the 'table\_name' field is unique and must match exactly the table name in the **results\_database.sqlite**.

Although those results could as be stored in the model database, it is possible that the number of tables in the model file would grow too quickly and would essentially clutter the **project\_database.sqlite**.

As a simple table, it looks as follows:

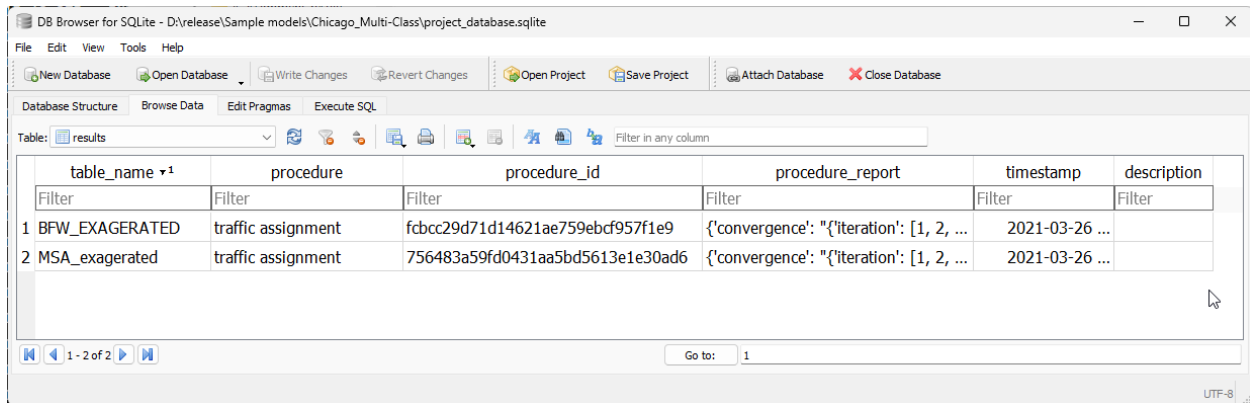

	table_name	procedure	procedure_id	procedure_report	timestamp	description
1	BFW_EXAGGERATED	traffic assignment	fbcc29d71d14621ae759ebcf957f1e9	{'convergence': '{iteration': [1, 2, ...	2021-03-26 ...	
2	MSA_exagerated	traffic assignment	756483a59fd0431aa5bd5613e1e30ad6	{'convergence': '{iteration': [1, 2, ...	2021-03-26 ...	

## See also

- [results table structure](#)  
Data model

## Periods table

The screenshot shows the 'DB Browser for SQLite' application window. The 'Table: periods' dropdown is selected. The table structure is displayed as follows:

period_id	period_start	period_end	period_description
Filter	Filter	Filter	Filter
1	1	0	86400 Default time period, whole day

Navigation controls at the bottom show '1 - 1 of 1' and a 'Go to: 1' field. The encoding is UTF-8.

### See also

- [aequibrae.project.network.Periods\(\)](#)  
Class documentation
- [periods table structure](#)  
Data model

## 2.2.2 Project database SQL data model

The data model presented in this section pertains only to the structure of AequibraE's 'project\_database' and general information about the usefulness of specific fields, especially on the interdependency between tables.

### Conventions

A few conventions have been adopted in the definition of the data model and some are listed below:

- Geometry field is always called **geometry**
- Projection is 4326 (WGS84)
- Tables are all in all lower case

### Project tables

#### about table structure

The *about* table holds information about the AequilibraE model currently developed.

The **infoname** field holds the name of information being added

The **infovalue** field holds the information to add

Field	Type	NULL allowed	Default Value
infoname	TEXT	NO	
infovalue	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists about (infoname TEXT UNIQUE NOT NULL,  
                                infovalue TEXT  
                                );  
INSERT INTO 'about' (infoname) VALUES ('model_name');  
INSERT INTO 'about' (infoname) VALUES ('region');  
INSERT INTO 'about' (infoname) VALUES ('description');  
INSERT INTO 'about' (infoname) VALUES ('author');  
INSERT INTO 'about' (infoname) VALUES ('year');  
INSERT INTO 'about' (infoname) VALUES ('scenario_description');  
INSERT INTO 'about' (infoname) VALUES ('model_version');  
INSERT INTO 'about' (infoname) VALUES ('project_id');  
INSERT INTO 'about' (infoname) VALUES ('aequilibrae_version');  
INSERT INTO 'about' (infoname) VALUES ('projection');  
INSERT INTO 'about' (infoname) VALUES ('driving_side');  
INSERT INTO 'about' (infoname) VALUES ('license');  
INSERT INTO 'about' (infoname) VALUES ('scenario_name');
```

## attributes documentation table structure

The *attributes\_documentation* table holds information about attributes in the tables links, link\_types, modes, nodes, and zones.

By default, these attributes are all documented, but further attributes can be added into the table.

The **name\_table** field holds the name of the table that has the attribute

The **attribute** field holds the name of the attribute

The **description** field holds the description of the attribute

It is possible to have one attribute with the same name in two different tables. However, one cannot have two attributes with the same name within the same table.

Field	Type	NULL allowed	Default Value
name_table	TEXT	NO	
attribute	TEXT	NO	
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists attributes_documentation (name_table TEXT NOT NULL,
                                                    attribute TEXT NOT NULL,
                                                    description TEXT,
                                                    UNIQUE (name_table, attribute)
                                                    );

CREATE INDEX idx_attributes ON attributes_documentation (name_table, attribute);
```

## link types table structure

The *link\_types* table holds information about the available link types in the network.

The **link\_type** field corresponds to the link type, and it is the table's primary key

The **link\_type\_id** field presents the identification of the link type

The **description** field holds the description of the link type

The **lanes** field presents the number of lanes for the link type

The **lane\_capacity** field presents the number of lanes for the link type

The **speed** field holds information about the speed in the link type Attributes follow

Field	Type	NULL allowed	Default Value
link_type*	VARCHAR	NO	
link_type_id	VARCHAR	NO	
description	VARCHAR	YES	
lanes	NUMERIC	YES	
lane_capacity	NUMERIC	YES	
speed	NUMERIC	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists link_types (link_type      VARCHAR UNIQUE NOT NULL PRIMARY_
↳KEY,
                                     link_type_id    VARCHAR UNIQUE NOT NULL,
                                     description      VARCHAR,
                                     lanes            NUMERIC,
                                     lane_capacity    NUMERIC,
                                     speed           NUMERIC
                                     CHECK(LENGTH(link_type_id) == 1));

INSERT INTO 'link_types' (link_type, link_type_id, description, lanes, lane_capacity)
↳VALUES('centroid_connector', 'z', 'VIRTUAL centroid connectors only', 10, 10000);

INSERT INTO 'link_types' (link_type, link_type_id, description, lanes, lane_capacity)
↳VALUES('default', 'y', 'Default general link type', 2, 900);

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'link_type', 'Link type name. E.g. arterial, or connector');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'link_type_id', 'Single letter identifying the mode. E.g. a, for_
↳arterial');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'description', 'Description of the same. E.g. Arterials are streets_
↳like AequilibraE Avenue');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'lanes', 'Default number of lanes in each direction. E.g. 2');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'lane_capacity', 'Default vehicle capacity per lane. E.g. 900');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'link_types', 'speed', 'Free flow velocity in m/s');
```

### links table structure

The links table holds all the links available in the aequilibrae network model regardless of the modes allowed on it.

All information on the fields `a_node` and `b_node` correspond to a entries in the `node_id` field in the `nodes` table. They are automatically managed with triggers as the user edits the network, but they are not protected by manual editing, which would break the network if it were to happen.

The **modes** field is a concatenation of all the ids (`mode_id`) of the models allowed on each link, and map directly to the `mode_id` field in the **Modes** table. A mode can only be added to a link if it exists in the **Modes** table.

The **link\_type** corresponds to the `link_type` field from the `link_types` table. As it is the case for modes, a link\_type can only be assigned to a link if it exists in the **link\_types** table.

The fields **length**, **node\_a** and **node\_b** are automatically updated by triggers based in the links' geometries and node positions. Link length is always measured in **meters**.

The table is indexed on **link\_id** (its primary key), **node\_a** and **node\_b**.

Field	Type	NULL allowed	Default Value
ogc_fid*	INTEGER	YES	
link_id	INTEGER	NO	
a_node	INTEGER	YES	
b_node	INTEGER	YES	
direction	INTEGER	NO	0
distance	NUMERIC	YES	
modes	TEXT	NO	
link_type	TEXT	YES	
name	TEXT	YES	
speed_ab	NUMERIC	YES	
speed_ba	NUMERIC	YES	
travel_time_ab	NUMERIC	YES	
travel_time_ba	NUMERIC	YES	
capacity_ab	NUMERIC	YES	
capacity_ba	NUMERIC	YES	
geometry	LINestring	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists links (ogc_fid          INTEGER PRIMARY KEY,
                                link_id           INTEGER NOT NULL UNIQUE,
                                a_node            INTEGER,
                                b_node            INTEGER,
                                direction          INTEGER NOT NULL DEFAULT 0,
                                distance           NUMERIC,
                                modes              TEXT    NOT NULL,
                                link_type          TEXT    REFERENCES link_types(link_
↪type) ON update RESTRICT ON delete RESTRICT,
                                'name'            TEXT,
                                speed_ab          NUMERIC,
                                speed_ba          NUMERIC,
                                travel_time_ab    NUMERIC,
                                travel_time_ba    NUMERIC,
                                capacity_ab        NUMERIC,
                                capacity_ba        NUMERIC
                                CHECK(TYPEOF(link_id) == 'integer')
                                CHECK(link_id > 0)
                                CHECK(TYPEOF(a_node) == 'integer')
                                CHECK(TYPEOF(b_node) == 'integer')
                                CHECK(TYPEOF(direction) == 'integer')
                                CHECK(LENGTH(modes)>0)
                                CHECK(direction IN (-1, 0, 1)));

select AddGeometryColumn( 'links', 'geometry', 4326, 'LINestring', 'XY', 1);

CREATE UNIQUE INDEX idx_link ON links (link_id);

SELECT CreateSpatialIndex( 'links' , 'geometry' );
```

(continues on next page)

```

CREATE INDEX idx_link_anode ON links (a_node);

CREATE INDEX idx_link_bnode ON links (b_node);

CREATE INDEX idx_link_modes ON links (modes);

CREATE INDEX idx_link_link_type ON links (link_type);

CREATE INDEX idx_links_a_node_b_node ON links (a_node, b_node);

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','link_id', 'Unique link ID');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','a_node', 'origin node for the link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','b_node', 'destination node for the link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','direction', 'Flow direction allowed on the link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','distance', 'length of the link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','modes', 'modes allowed on the link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','link_type', 'Link type');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','name', 'Name of the street/link');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','speed_*', 'Directional speeds (if allowed)');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','capacity_*', 'Directional link capacities (if allowed)');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'links','travel_time_*', 'Directional free-flow travel time (if allowed)');

```

## matrices table structure

The *matrices* table holds information about all matrices that exists in the project *matrix* folder.

The **name** field presents the name of the table.

The **file\_name** field holds the file name.

The **cores** field holds the information on the number of cores used.

The **procedure** field holds the name the the procedure that generated the result (e.g.: Traffic Assignment).

The **procedure\_id** field holds an unique alpha-numeric identifier for this prodecure.

The **timestamp** field holds the information when the procedure was executed.

The **description** field holds the user-provided description of the result.

Field	Type	NULL allowed	Default Value
name*	TEXT	NO	
file_name	TEXT	NO	
cores	INTEGER	NO	1
procedure	TEXT	YES	
procedure_id	TEXT	YES	
timestamp	DATETIME	YES	current_timestamp
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
create TABLE if not exists matrices (name          TEXT          NOT NULL PRIMARY KEY,
                                     file_name      TEXT          NOT NULL UNIQUE,
                                     cores           INTEGER      NOT NULL DEFAULT 1,
                                     procedure       TEXT,
                                     procedure_id    TEXT,
                                     timestamp      DATETIME     DEFAULT current_timestamp,
                                     description     TEXT);

CREATE INDEX name_matrices ON matrices (name);
```

### modes table structure

The *modes* table holds the information on all the modes available in the model's network.

The **mode\_name** field contains the descriptive name of the field.

The **mode\_id** field contains a single letter that identifies the mode.

The **description** field holds the description of the mode.

The **pce** field holds information on Passenger-Car equivalent for assignment. Defaults to **1.0**.

The **vot** field holds information on Value-of-Time for traffic assignment. Defaults to **0.0**.

The **ppv** field holds information on average persons per vehicle. Defaults to **1.0**. **ppv** can assume value 0 for non-travel uses. Attributes follow

Field	Type	NULL allowed	Default Value
mode_name	VARCHAR	NO	
mode_id*	VARCHAR	NO	
description	VARCHAR	YES	
pce	NUMERIC	NO	1.0
vot	NUMERIC	NO	0
ppv	NUMERIC	NO	1.0

(\* - Primary key)

The SQL statement for table and index creation is below.

```

CREATE TABLE if not exists modes (mode_name  VARCHAR UNIQUE NOT NULL,
                                mode_id     VARCHAR UNIQUE NOT NULL      PRIMARY_
↪KEY,
                                description VARCHAR,
                                pce         NUMERIC          NOT NULL DEFAULT 1.0,
                                vot         NUMERIC          NOT NULL DEFAULT 0,
                                ppv        NUMERIC          NOT NULL DEFAULT 1.0
                                CHECK (LENGTH(mode_id)=1));

INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('car', 'c', 'All_
↪motorized vehicles');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('transit', 't', 'Public_
↪transport vehicles');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('walk', 'w', 'Walking_
↪links');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('bicycle', 'b', 'Biking_
↪links');

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'mode_name', 'The more descriptive name of the mode (e.g. Bicycle)');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'mode_id', 'Single letter identifying the mode. E.g. b, for Bicycle');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'description', 'Description of the same. E.g. Bicycles used to be human-
↪powered two-wheeled vehicles');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'pce', 'Passenger-Car equivalent for assignment');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'vot', 'Value-of-Time for traffic assignment of class');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'modes', 'ppv', 'Average persons per vehicle. (0 for non-travel uses)');

```

**nodes table structure**

The *nodes* table holds all the network nodes available in AequilibraE model.

The **node\_id** field is an identifier of the node.

The **is\_centroid** field holds information if the node is a centroid of a network or not. Assumes values 0 or 1. Defaults to **0**.

The **modes** field identifies all modes connected to the node.

The **link\_types** field identifies all link types connected to the node.

Field	Type	NULL allowed	Default Value
ogc_fid*	INTEGER	YES	
node_id	INTEGER	NO	
is_centroid	INTEGER	NO	0
modes	TEXT	YES	
link_types	TEXT	YES	
geometry	POINT	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists nodes (ogc_fid      INTEGER PRIMARY KEY,
                                node_id      INTEGER UNIQUE NOT NULL,
                                is_centroid  INTEGER          NOT NULL DEFAULT 0,
                                modes        TEXT,
                                link_types   TEXT
                                CHECK (typeof(node_id) == 'integer')
                                CHECK (typeof(is_centroid) == 'integer')
                                CHECK (is_centroid >= 0)
                                CHECK (is_centroid <= 1));

SELECT AddGeometryColumn( 'nodes', 'geometry', 4326, 'POINT', 'XY', 1);

SELECT CreateSpatialIndex( 'nodes' , 'geometry' );

CREATE INDEX idx_node ON nodes (node_id);

CREATE INDEX idx_node_is_centroid ON nodes (is_centroid);

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'nodes', 'node_id', 'Unique node ID');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'nodes', 'is_centroid', 'Flag identifying centroids');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'nodes', 'modes', 'Modes connected to the node');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'nodes', 'link_types', 'Link types connected to the node');
```

## periods table structure

The periods table holds the time periods and their period\_id. Default entry with id 1 is the entire day. Attributes follow

Field	Type	NULL allowed	Default Value
period_id	INTEGER	NO	
period_start	INTEGER	NO	
period_end	INTEGER	NO	
period_description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists periods (period_id      INTEGER UNIQUE NOT NULL,
                                period_start      INTEGER NOT NULL,
                                period_end        INTEGER NOT NULL,
                                period_description  TEXT
                                CHECK (typeof(period_id) == 'integer')
                                CHECK (typeof(period_start) == 'integer')
                                CHECK (typeof(period_end) == 'integer'));

INSERT INTO periods (period_id, period_start, period_end, period_description)↵
```

(continues on next page)

(continued from previous page)

```

↪VALUES(1, 0, 86400, 'Default time period, whole day');

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'periods','period_id', 'ID of the time period');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'periods','period_start', 'Start of the time period');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'periods','period_end', 'End of the time period');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪'periods','period_description', 'Optional description of the time period');

```

### results table structure

The *results* table holds the metadata for results stored in *results\_database.sqlite*.

The **table\_name** field presents the actual name of the result table in *results\_database.sqlite*.

The **procedure** field holds the name the the procedure that generated the result (e.g.: Traffic Assignment).

The **procedure\_id** field holds an unique UUID identifier for this procedure, which is created at runtime.

The **procedure\_report** field holds the output of the complete procedure report.

The **timestamp** field holds the information when the procedure was executed.

The **description** field holds the user-provided description of the result.

Field	Type	NULL allowed	Default Value
table_name*	TEXT	NO	
procedure	TEXT	NO	
procedure_id	TEXT	NO	
procedure_report	TEXT	NO	
timestamp	DATETIME	YES	current_timestamp
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

create TABLE if not exists results (table_name      TEXT      NOT NULL PRIMARY KEY,
                                   procedure         TEXT      NOT NULL,
                                   procedure_id      TEXT      NOT NULL,
                                   procedure_report   TEXT      NOT NULL,
                                   timestamp          DATETIME DEFAULT current_
↪timestamp,
                                   description       TEXT);

```

### transit graph configs table structure

The *transit\_graph\_configs* table holds configuration parameters for a TransitGraph of a particular *period\_id* Attributes follow

Field	Type	NULL allowed	Default Value
period_id*	INTEGER	NO	
config	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists transit_graph_configs (period_id INTEGER UNIQUE NOT NULL
↳PRIMARY KEY REFERENCES periods(period_id),
                                config TEXT);

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'transit_graph_configs', 'period_id', 'The period this config is associated with.');
```

```
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'transit_graph_configs', 'mode_id', 'JSON string containing the configuration
↳parameters.');
```

### zones table structure

The *zones* table holds information on the Traffic Analysis Zones (TAZs) in AequilibraE's model.

The **zone\_id** field identifies the zone.

The **area** field corresponds to the area of the zone in **km2**. TAZs' area is automatically updated by triggers.

The **name** fields allows one to identify the zone using a name or any other description.

Field	Type	NULL allowed	Default Value
ogc_fid*	INTEGER	YES	
zone_id	INTEGER	NO	
area	NUMERIC	YES	
name	TEXT	YES	
geometry	MULTIPOLYGON	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE 'zones' (ogc_fid INTEGER PRIMARY KEY,
                        zone_id INTEGER UNIQUE NOT NULL,
                        area NUMERIC,
                        "name" TEXT);

SELECT AddGeometryColumn( 'zones', 'geometry', 4326, 'MULTIPOLYGON', 'XY', 1);
CREATE UNIQUE INDEX idx_zone ON zones (zone_id);
SELECT CreateSpatialIndex( 'zones' , 'geometry' );
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'zones', 'zone_id', 'Unique node ID');
```

```
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'zones', 'area', 'Area of the zone in km2');
```

```
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'zones', 'name', 'Name of the zone, if any');
```

## 2.2.3 Parameters YAML File

The parameter file holds the parameters information for a certain portion of the software.

### Run

The run section of the parameter file defines the default keyword arguments for the callable objects in the *Run module*. Each subsection names a callable symbol within the `run/__init__.py` module, if the symbol does not exist a `RuntimeError` will be raised when `project.run` is accessed. The arguments are applied via `functools.partial` and replace the objects within the module.

```
run:  
  example_function_with_kwargs:  
    arg1: "parameters.yml argument"
```

This can be used to define model entry points or functions that should be stored adjacent to the model itself.

### Assignment

The assignment section of the parameter file is the smallest one, and it contains only the convergence criteria for assignment in terms of the maximum number of iterations and target Relative Gap.

```
assignment:  
  equilibrium:  
    rgap: 1.0e-5  
    maximum_iterations: 500
```

Although these parameters are required to exist in the parameters file, one can override them during the assignment, as detailed in *Convergence criteria*.

### Distribution

The distribution section of the parameter file is also fairly short, as it contains only the parameters for number of maximum iterations, convergence level and maximum trip length to be applied in Iterative Proportional Fitting and synthetic gravity models, as shown below.

```
distribution:  
  gravity:  
    max error: 0.0001  
    max iterations: 100  
    max trip length: -1  
  ipf:  
    balancing tolerance: 0.001  
    convergence level: 0.0001  
    max iterations: 5000
```

## Network

There are four groups of parameters under the network section: *links*, *nodes*, *OSM*, and *GMNS*. The first are basically responsible for the design of the network to be created in case a new project/network is to be created from scratch, and for now each one of these groups contains only a single group of parameters called *fields*.

### Link Fields

The section for link fields are divided into *one-way* fields and *two-way* fields, where the two-way fields will be created by appending *\_ab* and *\_ba* to the end of each field's name.

There are 5 fields which cannot be changed, as they are mandatory fields for an AequilibraE network, and they are **link\_id**, **a\_node**, **b\_node**, **direction**, **distance** and **modes**. The field **geometry** is also default, but it is not listed in the parameter file due to its distinct nature.

The list of fields required in the network are enumerated as an array under either *one-way* or *two-way* in the parameter file, and each field is a dictionary/hash that has the field's name as the only key and under which there is a field for *description* and a field for *data type*. The data types available are those that exist within the [SQLite specification](#). We recommend limiting yourself to the use of **integer**, **numeric** and **varchar**.

```
network:
  links:
    fields:
      one-way:
        - link_id:
            description: Link ID. THIS FIELD CANNOT BE CHANGED
            type: integer
```

For the case of all non-mandatory fields, two more parameters are possible: 'osm\_source' and 'osm\_behaviour'. Those two fields provide the necessary information for importing data from [OpenStreetMap](#) in case such resource is required, and they work in the following way:

'osm\_source': The name of the tag for which data needs to be retrieved. Common tags are **highway**, **maxspeed** and **name**. The import result will contain a null value for all links that do not contain a value for such tag.

Within OSM, there is the concept of tags for each link direction, such as **maxspeed:forward** and **maxspeed:backward**. However, it is not always that a two-directional link contains tag values for both directions, and it might have only a tag value for **maxspeed**.

Although for **maxspeed** (which is the value for posted speed) we might want to copy the same value for both directions, that would not be true for parameters such as **lanes**, which we might want to split in half for both directions (cases with an odd number of lanes usually have forward/backward values tagged). For this reason, one can use the parameter 'osm\_behaviour' to define what to do with numeric tag values that have not been tagged for both directions. the allowed values for this parameter are **copy** and **divide**, as shown below.

```
    }
    two-way:
    - lanes:
      description: lanes
      type: integer
      osm_source: lanes
      osm_behaviour: divide
    - capacity:
      description: capacity
      type: numeric
    - speed:
      description: speed
      type: numeric
      osm_source: maxspeed
      osm_behaviour: copy
  }
```

The example below also shows that it is possible to mix fields that will be imported from [OSM](#) posted speed and number of lanes, and fields that need to be in the network but should not be imported from OSM, such as link capacities.

### Node fields

The specification for node fields is similar to the one for link fields, with the key difference that it does not make sense to have fields for one or two directions and that it is not possible yet to import any tagged values from OSM at the moment, and therefore the parameter *osm\_source* would have no effect here.

### OpenStreetMap

The **OSM** group of parameters has two specifications: **modes** and **all\_link\_types**.

**modes** contains the list of key tags we will import for each mode. Description of tags can be found on [OpenStreetMap Wiki](#), and we recommend not changing the standard parameters unless you are exactly sure of what you are doing.

For each mode to be imported there is also a mode filter to control for non-default behaviour. For example, in some cities pedestrians are generally allowed on cycleways, but they might be forbidden in specific links, which would be tagged as **pedestrian:no**. This feature is stored under the key *mode\_filter* under each mode to be imported.

There is also the possibility that not all keywords for link types for the region being imported, and therefore unknown link type tags are treated as a special case for each mode, and that is controlled by the key *unknown\_tags* in the parameters file.

### GMNS

The **GMNS** group of parameters has four specifications: **critical\_dist**, **link**, **node**, and **use\_definition**.

```

gmns:
  critical_dist: 2
  node:
    equivalency: ...
    fields: ...
  link:
    equivalency: ...
    fields: ...
  use_definition:
    fields: ...
    equivalency: ...

```

**critical\_dist** is a numeric threshold for the distance.

Under the keys **links**, **nodes**, and **use\_definition** there are the fields *equivalency* and *fields*. They represent the equivalency between GMNS and AequilibraE data fields and data types for each field.

## System

The system section of the parameters file holds information on the number of threads used in multi-threaded processes, logging and temp folders and whether we should be saving information to a log file at all, as exemplified below.

```

system:
  cpus: 12
  default_directory: C:\Users\pedro\Research\sourcecode\drt
  driving_side: right
  logging: true
  temp_directory: /temp
  logging_directory: /temp
} spatialite_path: C:\Users\pedro\Documents\mod_spatialite-NG-win-amd64

```

The number of CPUs have a special behaviour defined, as follows:

- **cpus<0** : The system will use the total number logical processors **MINUS** the absolute value of **cpus**
- **cpus=0** : The system will use the total number logical processors available
- **cpus>0**  
[The system will use exactly **cpus** for computation, limited to] the total number logical processors available

A few of these parameters, however, are targeted at its QGIS plugin, which is the case of the *driving\_side* and *default\_directory* parameters.

## Open Street Maps

The OSM section of the parameter file is relevant only when one plans to download a substantial amount of data from an Overpass API, in which case it is recommended to deploy a local Overpass server.

`osm:`

```
    overpass_endpoint: "http://overpass-api.de/api"
    nominatim_endpoint: "https://nominatim.openstreetmap.org/"
    accept_language: "en"
    max_attempts: 50
    timeout: 540
    max_query_area_size: 2500000000
  }
  sleeptime: 10
```

The user is also welcome to change the maximum area for a single query to the Overpass API (m<sup>2</sup>) and the pause duration between successive requests *sleeptime*.

It is also possible to set a custom address for the Nominatim server, but its use by AequilibraE is so small that it is likely not necessary to do so.

#### See also

- [aequilibrae.Parameters\(\)](#)  
Class documentation

## 2.2.4 Public Transport Database

AequilibraE's transit module has been updated in version 0.9.0 and more details on the **public\_transport.sqlite** are discussed on a nearly *per-table* basis below. We recommend understanding the role of each table before setting an AequilibraE model you intend to use.

The public transport database is created on the run when the `Transit` module is executed for the first time and it can take a little while.

#### See also

- [aequilibrae.transit.Transit\(\)](#)  
Class documentation
- [aequilibrae.transit.TransitGraphBuilder\(\)](#)  
Class documentation

In the following sections, we'll dive deep into the tables existing in the public transport database. Please notice that some tables are homonyms to the ones existing in the **project\_database.sqlite**, but its contents are related to the public transport graph building and assignment processes.

## 2.2.5 Public Transport SQL Data model

The data model presented in this section pertains only to the structure of AequilibraE's 'public\_transport' database and general information about the usefulness of specific fields, especially on the interdependency between tables.

## Conventions

A few conventions have been adopted in the definition of the data model and some are listed below:

- Geometry field is always called **geometry**
- Projection is 4326 (WGS84)
- Tables are all in all lower case

## Project tables

### agencies table structure

The *agencies* table holds information about the Public Transport agencies within the GTFS data. This table information comes from GTFS file *agency.txt*. You can check out more information [on agencies here](#).

**agency\_id** identifies the agency for the specified route

**agency** contains the full name of the transit agency

**feed\_date** indicates the date for which the GTFS feed is being imported

**service\_date** indicates the date for the indicate route scheduling

**description\_field** provides useful description of a transit agency

Field	Type	NULL allowed	Default Value
agency_id*	INTEGER	NO	
agency	TEXT	NO	
feed_date	TEXT	YES	
service_date	TEXT	YES	
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
create TABLE IF NOT EXISTS agencies (
  agency_id    INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT,
  agency       TEXT     NOT NULL,
  feed_date    TEXT,
  service_date TEXT,
  description   TEXT
);

create UNIQUE INDEX IF NOT EXISTS transit_operators_id ON agencies (agency_id);
```

### attributes documentation table structure

The *attributes\_documentation* table holds information about attributes in the tables links, link\_types, modes, nodes, and zones.

By default, these attributes are all documented, but further attributes can be added into the table.

The **name\_table** field holds the name of the table that has the attribute

The **attribute** field holds the name of the attribute

The **description** field holds the description of the attribute

It is possible to have one attribute with the same name in two different tables. However, one cannot have two attributes with the same name within the same table.

Field	Type	NULL allowed	Default Value
name_table	TEXT	NO	
attribute	TEXT	NO	
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists attributes_documentation (name_table TEXT NOT NULL,  
                                                    attribute TEXT NOT NULL,  
                                                    description TEXT,  
                                                    UNIQUE (name_table, attribute)  
                                                    );  
  
CREATE INDEX idx_attributes ON attributes_documentation (name_table, attribute);
```

### fare attributes table structure

The *fare\_attributes* table holds information about the fare values. This table information comes from the GTFS file *fare\_attributes.txt*. Given that this file is optional in GTFS, it can be empty. You can check out more information [on fare attributes here](#).

**fare\_id** identifies a fare class

**fare** describes a fare class

**agency\_id** identifies a relevant agency for a fare.

**price** specifies the fare price

**currency\_code** specifies the currency used to pay the fare

**payment\_method** indicates when the fare must be paid.

**transfer** indicates the number of transfers permitted on the fare

**transfer\_duration** indicates the length of time in seconds before a transfer expires.

Field	Type	NULL allowed	Default Value
fare_id*	INTEGER	NO	
fare	TEXT	NO	
agency_id	INTEGER	NO	
price	REAL	YES	
currency	TEXT	YES	
payment_method	INTEGER	YES	
transfer	INTEGER	YES	
transfer_duration	REAL	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

create TABLE IF NOT EXISTS fare_attributes (
  fare_id          INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT,
  fare             TEXT     NOT NULL,
  agency_id       INTEGER NOT NULL,
  price           REAL,
  currency        TEXT,
  payment_method  INTEGER,
  transfer        INTEGER,
  transfer_duration REAL,
  FOREIGN KEY(agency_id) REFERENCES agencies(agency_id) deferrable initially_
↳deferred
);

CREATE UNIQUE INDEX IF NOT EXISTS fare_transfer_uniqueness ON fare_attributes (fare_
↳id, transfer);

```

### fare rules table structure

The *fare\_rules* table holds information about the fare values. This table information comes from the GTFS file *fare\_rules.txt*. Given that this file is optional in GTFS, it can be empty.

The **fare\_id** identifies a fare class

The **route\_id** identifies a route associated with the fare class

The **origin** field identifies the transit fare zone for origin

The **destination** field identifies the transit fare zone for destination

The **contains** field identifies the zones that a rider will enter while using a given fare class.

Field	Type	NULL allowed	Default Value
fare_id	INTEGER	NO	
route_id	INTEGER	YES	
origin	TEXT	YES	
destination	TEXT	YES	
contains	INTEGER	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

create TABLE IF NOT EXISTS fare_rules (
  fare_id          INTEGER NOT NULL,
  route_id        INTEGER,
  origin          TEXT,
  destination     TEXT,
  contains        INTEGER,
  FOREIGN KEY(fare_id) REFERENCES fare_attributes(fare_id) deferrable initially_
↳deferred,
  FOREIGN KEY(route_id) REFERENCES routes(route_id) deferrable initially deferred
);

```

**fare zones table structure**

The *fare\_zones* table hold information on the transit fare zones and the transit agencies that operate in it.

**transit\_fare\_zone** identifies the transit fare zones

**agency\_id** identifies the agency/agencies for the specified fare zone

Field	Type	NULL allowed	Default Value
transit_fare_zone	TEXT	NO	
agency_id	INTEGER	NO	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS fare_zones (
    transit_fare_zone TEXT NOT NULL,
    agency_id INTEGER NOT NULL,
    FOREIGN KEY (agency_id) REFERENCES agencies (agency_id) DEFERRABLE INITIALLY_
↳deferred
);
```

**link types table structure**

The *link\_types* table holds information about the available link types in the network.

The **link\_type** field corresponds to the link type, and it is the table's primary key

The **link\_type\_id** field presents the identification of the link type

The **description** field holds the description of the link type

The **lanes** field presents the number of lanes for the link type

The **lane\_capacity** field presents the number of lanes for the link type

The **speed** field holds information about the speed in the link type Attributes follow

Field	Type	NULL allowed	Default Value
link_type*	VARCHAR	NO	
link_type_id	VARCHAR	NO	
description	VARCHAR	YES	
lanes	NUMERIC	YES	
lane_capacity	NUMERIC	YES	
speed	NUMERIC	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists link_types (link_type VARCHAR UNIQUE NOT NULL PRIMARY_
↳KEY,
                                link_type_id VARCHAR UNIQUE NOT NULL,
                                description VARCHAR,
```

(continues on next page)

(continued from previous page)

```

lanes          NUMERIC,
lane_capacity  NUMERIC,
speed         NUMERIC
CHECK(LENGTH(link_type_id) == 1));

INSERT INTO 'link_types' (link_type, link_type_id, description, lanes, lane_capacity)↵
↵VALUES('centroid_connector', 'z', 'VIRTUAL centroid connectors only', 10, 10000);

INSERT INTO 'link_types' (link_type, link_type_id, description, lanes, lane_capacity)↵
↵VALUES('default', 'y', 'Default general link type', 2, 900);

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','link_type', 'Link type name. E.g. arterial, or connector');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','link_type_id', 'Single letter identifying the mode. E.g. a, for↵
↵arterial');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','description', 'Description of the same. E.g. Arterials are streets↵
↵like AequilibraE Avenue');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','lanes', 'Default number of lanes in each direction. E.g. 2');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','lane_capacity', 'Default vehicle capacity per lane. E.g. 900');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↵'link_types','speed', 'Free flow velocity in m/s');

```

## links table structure

The links table holds all the links available in the aequilibrae network model regardless of the modes allowed on it.

All information on the fields `a_node` and `b_node` correspond to a entries in the `node_id` field in the `nodes` table. They are automatically managed with triggers as the user edits the network, but they are not protected by manual editing, which would break the network if it were to happen.

The **modes** field is a concatenation of all the ids (`mode_id`) of the models allowed on each link, and map directly to the `mode_id` field in the **Modes** table. A mode can only be added to a link if it exists in the **Modes** table.

The **link\_type** corresponds to the `link_type` field from the `link_types` table. As it is the case for modes, a `link_type` can only be assigned to a link if it exists in the **link\_types** table.

The fields **length**, **node\_a** and **node\_b** are automatically updated by triggers based in the links' geometries and node positions. Link length is always measured in **meters**.

The table is indexed on **link\_id** (its primary key), **node\_a** and **node\_b**.

Field	Type	NULL allowed	Default Value
ogc_fid*	INTEGER	YES	
link_id	INTEGER	NO	
period_id	INTEGER	NO	
a_node	INTEGER	YES	
b_node	INTEGER	YES	
direction	INTEGER	NO	0
distance	NUMERIC	YES	
modes	TEXT	NO	
link_type	TEXT	YES	
line_id	TEXT	YES	
stop_id	TEXT	YES	
line_seg_idx	INTEGER	YES	
trav_time	NUMERIC	NO	
freq	NUMERIC	NO	
o_line_id	TEXT	YES	
d_line_id	TEXT	YES	
transfer_id	TEXT	YES	
geometry	LINestring	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists links (ogc_fid          INTEGER PRIMARY KEY,
                                link_id           INTEGER NOT NULL,
                                period_id        INTEGER NOT NULL,
                                a_node           INTEGER,
                                b_node           INTEGER,
                                direction         INTEGER NOT NULL DEFAULT 0,
                                distance          NUMERIC,
                                modes            TEXT NOT NULL,
                                link_type        TEXT REFERENCES link_types(link_
↪type) ON update RESTRICT ON delete RESTRICT,
                                line_id          TEXT,
                                stop_id         TEXT REFERENCES stops(stop) ON_
↪update RESTRICT ON delete RESTRICT,
                                line_seg_idx     INTEGER,
                                trav_time        NUMERIC NOT NULL,
                                freq            NUMERIC NOT NULL,
                                o_line_id        TEXT,
                                d_line_id        TEXT,
                                transfer_id      TEXT,
                                CHECK(TYPEOF(link_id) == 'integer')
                                UNIQUE(link_id, period_id) ON CONFLICT ABORT
                                CHECK(link_id > 0)
                                CHECK(TYPEOF(a_node) == 'integer')
                                CHECK(TYPEOF(b_node) == 'integer')
                                CHECK(TYPEOF(direction) == 'integer')
                                CHECK(LENGTH(modes)>0)
                                CHECK(LENGTH(direction)==1));
```

(continues on next page)

(continued from previous page)

```

select AddGeometryColumn( 'links', 'geometry', 4326, 'LINESTRING', 'XY', 1);

CREATE UNIQUE INDEX idx_link ON links (link_id, period_id);

CREATE INDEX idx_period_links ON links (period_id);

SELECT CreateSpatialIndex( 'links' , 'geometry' );

CREATE INDEX idx_link_anode ON links (a_node);

CREATE INDEX idx_link_bnode ON links (b_node);

CREATE INDEX idx_link_modes ON links (modes);

CREATE INDEX idx_link_link_type ON links (link_type);

CREATE INDEX idx_links_a_node_b_node ON links (a_node, b_node);

INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','link_id', 'Unique link ID');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','a_node', 'origin node for the link');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','b_node', 'destination node for the link');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','direction', 'Flow direction allowed on the link');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','distance', 'length of the link');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','modes', 'modes allowed on the link');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','link_type', 'Link type');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','line_id', 'ID of the line the link belongs to');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','stop_id', 'ID of the stop the link belongs to ');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','line_seg_idx', 'Line segment index');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','trav_time', 'Travel time');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','freq', 'Frequency of link traversal');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','*_line_id', 'Origin/Destination line ID for transfer↵
↵links');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute,↵
↵description) VALUES('links','transfer_id', 'Transfer link ID');

```

## modes table structure

The *modes* table holds the information on all the modes available in the model's network.

The **mode\_name** field contains the descriptive name of the field.

The **mode\_id** field contains a single letter that identifies the mode.

The **description** field holds the description of the mode.

The **pce** field holds information on Passenger-Car equivalent for assignment. Defaults to **1.0**.

The **vot** field holds information on Value-of-Time for traffic assignment. Defaults to **0.0**.

The **ppv** field holds information on average persons per vehicle. Defaults to **1.0**. **ppv** can assume value 0 for non-travel uses. Attributes follow

Field	Type	NULL allowed	Default Value
mode_name	VARCHAR	NO	
mode_id*	VARCHAR	NO	
description	VARCHAR	YES	
pce	NUMERIC	NO	1.0
vot	NUMERIC	NO	0
ppv	NUMERIC	NO	1.0

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists modes (mode_name  VARCHAR UNIQUE NOT NULL,
                                   mode_id    VARCHAR UNIQUE NOT NULL      PRIMARY_
↳KEY,
                                   description VARCHAR,
                                   pce         NUMERIC          NOT NULL DEFAULT 1.0,
                                   vot         NUMERIC          NOT NULL DEFAULT 0,
                                   ppv        NUMERIC          NOT NULL DEFAULT 1.0
                                   CHECK (LENGTH(mode_id)==1));

INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('car', 'c', 'All_
↳motorized vehicles');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('transit', 't', 'Public_
↳transport vehicles');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('walk', 'w', 'Walking_
↳links');
INSERT INTO 'modes' (mode_name, mode_id, description) VALUES('bicycle', 'b', 'Biking_
↳links');

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'modes','mode_name', 'The more descriptive name of the mode (e.g. Bicycle)');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'modes','mode_id', 'Single letter identifying the mode. E.g. b, for Bicycle');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'modes','description', 'Description of the same. E.g. Bicycles used to be human-
↳powered two-wheeled vehicles');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'modes','pce', 'Passenger-Car equivalent for assignment');
```

(continues on next page)

(continued from previous page)

```

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'modes', 'vot', 'Value-of-Time for traffic assignment of class');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'modes', 'ppv', 'Average persons per vehicle. (0 for non-travel uses)');

```

### node types table structure

The *node\_types* table holds information about the available node types in the network.

The **node\_type** field corresponds to the node type, and it is the table's primary key

The **node\_type\_id** field presents the identification of the node type

The **description** field holds the description of the node type

Attributes follow

Field	Type	NULL allowed	Default Value
node_type*	VARCHAR	NO	
node_type_id	VARCHAR	NO	
description	VARCHAR	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

CREATE TABLE if not exists node_types (node_type      VARCHAR UNIQUE NOT NULL PRIMARY_
↪ KEY,
                                     node_type_id    VARCHAR UNIQUE NOT NULL,
                                     description      VARCHAR);

INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('default', 'y',
↪ 'Default general node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('od', 'n',
↪ 'Origin/Desination node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('origin', 'o',
↪ 'Origin node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('destination',
↪ 'd', 'Desination node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('stop', 's',
↪ 'Stop node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('alighting', 'a
↪ ', 'Alighting node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('boarding', 'b
↪ ', 'Boarding node type');
INSERT INTO 'node_types' (node_type, node_type_id, description) VALUES ('walking', 'w',
↪ 'Walking node type');

INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'node_types', 'node_type', 'Node type name. E.g stop or boarding');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↪ 'node_types', 'node_type_id', 'Single letter identifying the mode. E.g. a, for_
↪ alighting');

```

(continues on next page)

(continued from previous page)

```
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳ 'node_types', 'description', 'Description of the same. E.g. Stop nodes connect ODS
↳ and walking nodes to boarding and alighting nodes via boarding and alighting links.
↳ ');
```

**nodes table structure**

The *nodes* table holds all the network nodes available in AequilibraE transit model.

The **node\_id** field is an identifier of the node.

The **is\_centroid** field holds information if the node is a centroid of a network or not. Assumes values 0 or 1. Defaults to **0**.

The **stop\_id** field indicates which stop this node belongs too. This field is TEXT as it might encode a street name or such.

The **line\_id** field indicates which line this node belongs too. This field is TEXT as it might encode a street name or such.

The **line\_seg\_idx** field indexes the segment of line **line\_id**. Zero based.

The **modes** field identifies all modes connected to the node.

The **link\_type** field identifies all link types connected to the node.

The **node\_type** field identifies the types of this node.

The **taz\_id** field is an identifier for the transit assignment zone this node belongs to.

Field	Type	NULL allowed	Default Value
ogc_fid*	INTEGER	YES	
node_id	INTEGER	NO	
period_id	INTEGER	NO	
is_centroid	INTEGER	NO	0
stop_id	TEXT	YES	
line_id	TEXT	YES	
line_seg_idx	INTEGER	YES	
modes	TEXT	YES	
link_types	TEXT	YES	
node_type	TEXT	YES	
taz_id	TEXT	YES	
geometry	POINT	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE if not exists nodes (ogc_fid      INTEGER PRIMARY KEY,
                                  node_id      INTEGER NOT NULL,
                                  period_id     INTEGER NOT NULL,
                                  is_centroid   INTEGER          NOT NULL DEFAULT 0,
                                  stop_id      TEXT,
                                  line_id      TEXT,
                                  line_seg_idx  INTEGER,
                                  modes        TEXT,
                                  link_types    TEXT,
```

(continues on next page)

(continued from previous page)

```

        node_type    TEXT,
        taz_id       TEXT,
        CHECK(TYPEOF(node_id) == 'integer')
        UNIQUE(node_id, period_id) ON CONFLICT ABORT
        CHECK(TYPEOF(is_centroid) == 'integer')
        CHECK(is_centroid >= 0)
        CHECK(is_centroid <= 1));

SELECT AddGeometryColumn( 'nodes', 'geometry', 4326, 'POINT', 'XY', 1);

SELECT CreateSpatialIndex( 'nodes' , 'geometry' );

CREATE INDEX idx_node ON nodes (node_id, period_id);

CREATE INDEX idx_period_nodes ON nodes (period_id);

CREATE INDEX idx_node_is_centroid ON nodes (is_centroid);

INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'node_id', 'Unique node ID');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'is_centroid', 'Flag identifying centroids');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'stop_id', 'ID of the Stop this node belongs to');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'line_id', 'ID of the Line this node belongs to');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'line_seg_idx', 'Index of the line segment this node ↵
↵belongs to');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'modes', 'Modes connected to the node');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'link_types', 'Link types connected to the node');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'node_type', 'Node types of this node');
INSERT OR REPLACE INTO 'attributes_documentation' (name_table, attribute, ↵
↵description) VALUES('nodes', 'taz_id', 'Transit assignment zone id');

```

## pattern mapping table structure

The *pattern\_mapping* table holds information on the stop pattern for each route.

**pattern\_id** is an unique pattern for the route

**seq** identifies the sequence of the stops for a trip

**link** identifies the *link\_id* in the links table that corresponds to the pattern matching

**dir** indicates the direction of travel for a trip

Field	Type	NULL allowed	Default Value
pattern_id*	INTEGER	NO	
seq	INTEGER	NO	
link	INTEGER	NO	
dir	INTEGER	NO	
geometry	LINestring	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS pattern_mapping (
  pattern_id INTEGER NOT NULL,
  seq INTEGER NOT NULL,
  link INTEGER NOT NULL,
  dir INTEGER NOT NULL,
  PRIMARY KEY(pattern_id, "seq"),
  FOREIGN KEY(pattern_id) REFERENCES routes (pattern_id) deferrable initially_
↳deferred,
  FOREIGN KEY(link) REFERENCES route_links (link) deferrable initially deferred
);

SELECT AddGeometryColumn( 'pattern_mapping', 'geometry', 4326, 'LINestring', 'XY');

SELECT CreateSpatialIndex( 'pattern_mapping' , 'geometry' );
```

**results table structure**

The *results* table holds the metadata for results stored in *results\_database.sqlite*.

The **table\_name** field presents the actual name of the result table in *results\_database.sqlite*.

The **procedure** field holds the name the the procedure that generated the result (e.g.: Traffic Assignment).

The **procedure\_id** field holds an unique UUID identifier for this procedure, which is created at runtime.

The **procedure\_report** field holds the output of the complete procedure report.

The **timestamp** field holds the information when the procedure was executed.

The **description** field holds the user-provided description of the result.

Field	Type	NULL allowed	Default Value
table_name*	TEXT	NO	
procedure	TEXT	NO	
procedure_id	TEXT	NO	
procedure_report	TEXT	NO	
timestamp	DATETIME	YES	current_timestamp
description	TEXT	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

create TABLE if not exists results (table_name      TEXT      NOT NULL PRIMARY KEY,
                                   procedure        TEXT      NOT NULL,
                                   procedure_id     TEXT      NOT NULL,
                                   procedure_report TEXT      NOT NULL,
                                   timestamp       DATETIME DEFAULT current_
↳timestamp,
                                   description      TEXT);

```

### route links table structure

The *route\_links* table holds information on the links of a route.

**transit\_link** identifies the GTFS transit links for the route

**pattern\_id** is an unique pattern for the route

**seq** identifies the sequence of the stops for a trip

**from\_stop** identifies the stop the vehicle is departing

**to\_stop** identifies the next stop the vehicle is going to arrive

**distance** identifies the distance (in meters) the vehicle travel between the stops

Field	Type	NULL allowed	Default Value
transit_link	INTEGER	NO	
pattern_id	INTEGER	NO	
seq	INTEGER	NO	
from_stop	INTEGER	NO	
to_stop	INTEGER	NO	
distance	INTEGER	NO	
geometry	LINestring	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```

CREATE TABLE IF NOT EXISTS route_links (
  transit_link      INTEGER NOT NULL,
  pattern_id       INTEGER NOT NULL,
  seq              INTEGER NOT NULL,
  from_stop        INTEGER NOT NULL,
  to_stop          INTEGER NOT NULL,
  distance         INTEGER NOT NULL,
  FOREIGN KEY(pattern_id) REFERENCES "routes"(pattern_id) deferrable initially_
↳deferred,
  FOREIGN KEY(from_stop) REFERENCES "stops"(stop_id) deferrable initially deferred
  FOREIGN KEY(to_stop) REFERENCES "stops"(stop_id) deferrable initially deferred
);

create UNIQUE INDEX IF NOT EXISTS route_links_stop_id ON route_links (pattern_id,
↳transit_link);

select AddGeometryColumn( 'route_links', 'geometry', 4326, 'LINestring', 'XY');

```

(continues on next page)

(continued from previous page)

```
select CreateSpatialIndex( 'route_links' , 'geometry' );
```

### routes table structure

The *routes* table holds information on the available transit routes for a specific day. This table information comes from the GTFS file *routes.txt*. You can find more information about [the routes table here](#).

**pattern\_id** is an unique pattern for the route

**route\_id** identifies a route

**route** identifies the name of a route

**agency\_id** identifies the agency for the specified route

**shortname** identifies the short name of a route

**longname** identifies the long name of a route

**description** provides useful description of a route

**route\_type** indicates the type of transportation used on a route

**pce** indicates the passenger car equivalent for transportation used on a route

**seated\_capacity** indicates the seated capacity of a route

**total\_capacity** indicates the total capacity of a route

Field	Type	NULL allowed	Default Value
pattern_id*	INTEGER	NO	
route_id	INTEGER	NO	
route	TEXT	NO	
agency_id	INTEGER	NO	
shortname	TEXT	YES	
longname	TEXT	YES	
description	TEXT	YES	
route_type	INTEGER	NO	
pce	NUMERIC	NO	2.0
seated_capacity	INTEGER	YES	
total_capacity	INTEGER	YES	
geometry	MULTILINESTRING	YES	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS routes (
  pattern_id    INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT,
  route_id     INTEGER NOT NULL,
  route        TEXT    NOT NULL,
  agency_id    INTEGER NOT NULL,
  shortname    TEXT,
  longname     TEXT,
  description  TEXT,
```

(continues on next page)

(continued from previous page)

```

route_type      INTEGER NOT NULL,
pce             NUMERIC NOT NULL DEFAULT 2.0,
seated_capacity INTEGER,
total_capacity  INTEGER,
FOREIGN KEY(agency_id) REFERENCES agencies(agency_id) deferrable initially_
↳deferred
);

select AddGeometryColumn( 'routes', 'geometry', 4326, 'MULTILINESTRING', 'XY');

select CreateSpatialIndex( 'routes' , 'geometry' );

```

### stop connectors table structure

The *stops\_connectors* table holds information on the connection of the GTFS network with the real network.

**id\_from** identifies the network link the vehicle departs

**id\_to** identifies the network link th vehicle is heading to

**conn\_type** identifies the type of connection used to connect the links

**traversal\_time** represents the time spent crossing the link

**penalty\_cost** identifies the penalty in the connection

Field	Type	NULL allowed	Default Value
id_from	INTEGER	NO	
id_to	INTEGER	NO	
conn_type	INTEGER	NO	
traversal_time	INTEGER	NO	
penalty_cost	INTEGER	NO	
geometry	LINestring	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```

CREATE TABLE IF NOT EXISTS stop_connectors (
  id_from      INTEGER NOT NULL,
  id_to        INTEGER NOT NULL,
  traversal_time INTEGER NOT NULL,
  penalty_cost INTEGER NOT NULL);

SELECT AddGeometryColumn('stop_connectors', 'geometry', 4326, 'LINestring', 'XY', 1);

SELECT CreateSpatialIndex('stop_connectors' , 'geometry');

CREATE INDEX IF NOT EXISTS stop_connectors_id_from ON stop_connectors (id_from);

CREATE INDEX IF NOT EXISTS stop_connectors_id_to ON stop_connectors (id_to);

```

**stops table structure**

The *stops* table holds information on the stops where vehicles pick up or drop off riders. This table information comes from the GTFS file *stops.txt*. You can find more information about [the stops table here](#).

**stop\_id** is an unique identifier for a stop

**stop** identifies a stop, statio, or station entrance

**agency\_id** identifies the agency for the specified route

**link** identifies the *link\_id* in the links table that corresponds to the pattern matching

**dir** indicates the direction of travel for a trip

**name** identifies the name of a stop

**parent\_station** defines hierarchy between different locations defined in *stops.txt*.

**description** provides useful description of the stop location

**street** identifies the address of a stop

**zone\_id** identifies the model zone for a stop

**transit\_fare\_zone** identifies the transit fare zone for a stop

**route\_type** indicates the type of transporation used on a route

Field	Type	NULL allowed	Default Value
stop_id*	TEXT	YES	
stop	TEXT	NO	
agency_id	INTEGER	NO	
link	INTEGER	YES	
dir	INTEGER	YES	
name	TEXT	YES	
parent_station	TEXT	YES	
description	TEXT	YES	
street	TEXT	YES	
zone_id	INTEGER	YES	
transit_fare_zone	TEXT	YES	
route_type	INTEGER	NO	-1
geometry	POINT	NO	"

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS stops (
  stop_id          TEXT    PRIMARY KEY,
  stop             TEXT    NOT NULL ,
  agency_id       INTEGER NOT NULL,
  link            INTEGER,
  dir             INTEGER,
  name            TEXT,
  parent_station  TEXT,
  description     TEXT,
  street          TEXT,
  zone_id         INTEGER,
```

(continues on next page)

(continued from previous page)

```

transit_fare_zone TEXT,
route_type          INTEGER NOT NULL DEFAULT -1,
FOREIGN KEY(agency_id) REFERENCES agencies(agency_id)
);

create INDEX IF NOT EXISTS stops_stop_id ON stops (stop_id);

select AddGeometryColumn( 'stops', 'geometry', 4326, 'POINT', 'XY', 1);

select CreateSpatialIndex( 'stops' , 'geometry' );

```

### trigger settings table structure

This table intends to allow the enabled and disabling of certain triggers

Field	Type	NULL allowed	Default Value
name*	TEXT	YES	
enabled	INTEGER	NO	TRUE

(\* - Primary key)

The SQL statement for table and index creation is below.

```

CREATE TABLE if not exists trigger_settings (name TEXT PRIMARY KEY, enabled INTEGER_
↳NOT NULL DEFAULT TRUE);
INSERT INTO trigger_settings (name, enabled) VALUES('new_link_a_or_b_node', TRUE);
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'trigger_settings', 'name', 'name for trigger to query against');
INSERT INTO 'attributes_documentation' (name_table, attribute, description) VALUES (
↳'trigger_settings', 'enabled', 'boolean value');

```

### trips table structure

The *trips* table holds information on trips for each route. This table comes from the GTFS file *trips.txt*. You can find more information about the [trips table here](#).

**trip\_id** identifies a trip

**trip** identifies the trip to a rider

**dir** indicates the direction of travel for a trip

**pattern\_id** is an unique pattern for the route

Field	Type	NULL allowed	Default Value
trip_id*	INTEGER	NO	
trip	TEXT	YES	
dir	INTEGER	NO	
pattern_id	INTEGER	NO	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS trips (  
  trip_id      INTEGER NOT NULL PRIMARY KEY AUTOINCREMENT,  
  trip         TEXT,  
  dir         INTEGER NOT NULL,  
  pattern_id   INTEGER NOT NULL,  
  FOREIGN KEY(pattern_id) REFERENCES routes(pattern_id) deferrable initially_  
→deferred  
);
```

### trips schedule table structure

The *trips\_schedule* table holds information on the sequence of stops of a trip.

**trip\_id** is a unique identifier of a trip

**seq** identifies the sequence of the stops for a trip

**arrival** identifies the arrival time at the stop

**departure** identifies the departure time at the stop

Field	Type	NULL allowed	Default Value
trip_id*	INTEGER	NO	
seq	INTEGER	NO	
arrival	INTEGER	NO	
departure	INTEGER	NO	

(\* - Primary key)

The SQL statement for table and index creation is below.

```
CREATE TABLE IF NOT EXISTS trips_schedule (  
  trip_id  INTEGER NOT NULL,  
  seq      INTEGER NOT NULL,  
  arrival  INTEGER NOT NULL,  
  departure INTEGER NOT NULL,  
  PRIMARY KEY(trip_id, "seq"),  
  FOREIGN KEY(trip_id) REFERENCES trips(trip_id) deferrable initially deferred  
);
```

## 2.2.6 Project Data Components

In the *Project structure* section, we present the structure of an AequilibraE project: databases, folders, and parameters. In this section, we present the data components of the project, that is, the data that is presented in the databases.


The components of an AequilibraE project are:

- `project.About`
- `project.FieldEditor`
- `project.Log`
- `project.Matrices`

- `project.Network`
- `project.Zoning`

Network and Zoning are the components that contain the geo-spatial information of the project, such as links, nodes, and zones, which can also be manipulated. In the Network component, there are also non-geometric classes related to the project network, such as Modes, LinkTypes, and Periods.

One important thing to observe is that related to each component in Matrices, Network, and Zoning, there is an object with similar name that corresponds to one object in the class. Thus `project.network.links` enables the access to manipulate the 'links' table, and each item in the items table is a `Link` object.

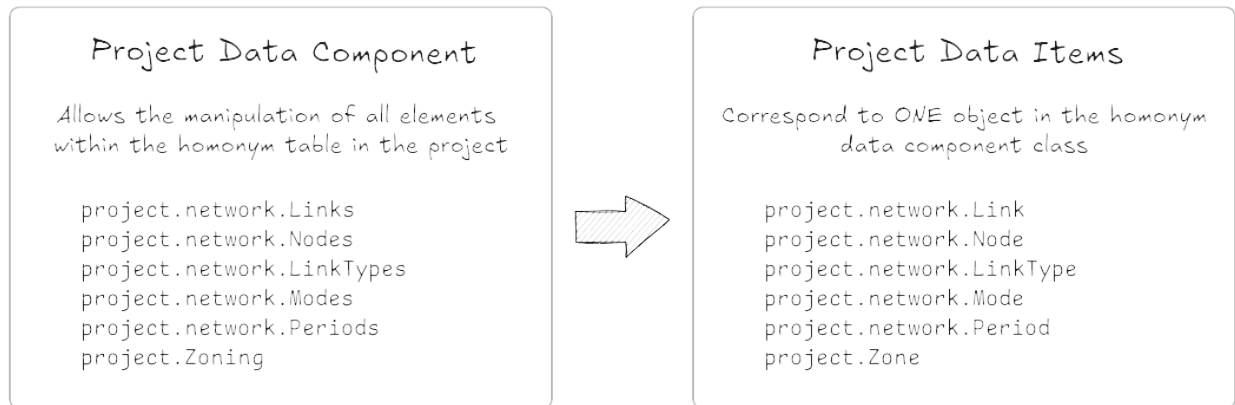

## Components

An AequilibraE project holds geometric information that can be accessed by the user in three different classes: `Links`, `Nodes`, and `Zoning`. We'll first cover these classes, and then we'll go over the project components without geo-spatial information.

### `project.network.links`

This method allows you to access the API resources to manipulate the 'links' table. Each item in the 'links' table is a `Link` object.

```

>>> from shapely.geometry import LineString

>>> project = create_example(project_path, "coquimbo")

>>> project_links = project.network.links

# Let's add a new field to our 'links' table
>>> project_links.fields.add("my_field", "This is an example", "TEXT")

# To save this modification, we must refresh the table
>>> project_links.refresh_fields()

# Let's add a new link to our project
>>> new_link = project_links.new()
>>> new_link.geometry = LineString([(-71.304754, -29.955233), (-71.304863, -29.
↪954049)])
>>> new_link.modes = "bctw"
  
```

(continues on next page)

(continued from previous page)

```

# To add a new link, it must be explicitly saved
>>> new_link.save()

# The 'links' table has three fields which cannot be empty (i.e. with `NULL` values):
# `link_id`, `direction`, and `modes`. When we create a node, `new` automatically
# creates a `link_id`, and sets the default value (0) for direction. Thus, the modes
# information should be added, otherwise, it will raise an error.

# To delete one link from the project, you can use one of the following
>>> other_link = project_links.get(21332)
>>> other_link.delete()

# or
>>> project_links.delete(21337)

# The `copy_link` function creates a copy of a specified link
# It is very helpful case you want to split a link.
# You can check out in one of the usage examples.
>>> link_copy = project_links.copy_link(10972)

# Don't forget to save the modifications to the links layer
>>> project_links.save()

# And refresh the links in memory for usage
>>> project_links.refresh()

```

## References

- *Link layer changes and expected behavior*

## See also

- [aequilibrae.project.network.Links\(\)](#)  
Class documentation
- *Create project from a link layer*  
Usage example
- *Editing network geometry: Splitting link*  
Usage example

## project.network.nodes

This method allows you to access the API resources to manipulate the 'nodes' table. Each item in the 'nodes' table is a Node object.

```

>>> from shapely.geometry import Point

>>> project_nodes = project.network.nodes

```

(continues on next page)

(continued from previous page)

```

# To get one 'Node' object
>>> node = project_nodes.get(10070)

# We can check the existing fields for each node in the 'nodes' table
>>> node.data_fields()
['node_id', 'is_centroid', 'modes', 'link_types', 'geometry', 'osm_id']

# Let's renumber this node and save it
>>> node.renumber(1000)
>>> node.save()

# A node can also be used to add a special generator
# `new_centroid` returns a `Node` object that we can edit
>>> centroid = project_nodes.new_centroid(2000)

# Don't forget to add a geometry to your centroid if it's a new node
# This centroid corresponds to the Port of Coquimbo!
>>> centroid.geometry = Point(-71.32, -29.94)

# As this centroid is not associated with a zone, we must tell AequilibraE the
↳ initial area around
# the centroid to look for candidate nodes to which the centroid can connect.
>>> centroid.connect_mode(area=centroid.geometry.buffer(0.01), mode_id="c")

# Don't forget to update these changes to the nodes in memory
>>> project_nodes.refresh()

# And save them into your project
>>> project_nodes.save()

# Last but not less important, you can check your project nodes
# `project_nodes.data` returns a geopandas GeoDataFrame.
>>> nodes_data = project_nodes.data

>>> # or if you want to check the coordinate of each node in the shape of
>>> # a Pandas DataFrame
>>> coords = project_nodes.lonlat
>>> coords.head(3)
   node_id   lon   lat
0    10037 -71.315117 -29.996804
1    10064 -71.336604 -29.949050
2    10065 -71.336517 -29.949062

```

## References

- *Node layer changes and expected behavior*

## See also

- `aequilibrae.project.network.Nodes()`

### Class documentation

- *Editing network geometry: Nodes*  
Usage example

### `project.zoning`

This method allows you to access the API resources to manipulate the 'zones' table. Each item in the 'zones' table is a Zone object.

```
>>> from shapely.geometry import Polygon

>>> project_zones = project.zoning

# Let's start this example by adding a new field to the 'zones' table
>>> project_zones.fields.add("parking_spots", "Number of public parking spots",
↪ "INTEGER")

# We can check if the new field was indeed created
>>> project_zones.fields.all_fields()
['area', 'employment', 'geometry', 'name', 'parking_spots', 'population', 'zone_id']

# Now let's get a zone and modify it
>>> zone = project_zones.get(40)

# By disconnecting the transit mode
>>> zone.disconnect_mode("t")

# Connecting the bicycle mode
>>> zone.connect_mode("b")

# And adding the number of public parking spots in the field we just created
>>> zone.parking_spots = 30

# You can save this changes if you want
>>> zone.save()

# The changes connecting / disconnecting modes reflect in the zone centroids
# and can be seen in the 'nodes' table.

# To return a dictionary with all 'Zone' objects in the model
>>> project_zones.all_zones()
{1: ..., ..., 133: ...}

# If you want to delete a zone
>>> other_zone = project_zones.get(38)
>>> other_zone.delete()

# Or to add a new one
>>> zone_extent = Polygon([(-71.3325, -29.9473), (-71.3283, -29.9473), (-71.3283, -29.
↪ 9539), (-71.3325, -29.9539)])

>>> new_zone = project_zones.new(38)
```

(continues on next page)

(continued from previous page)

```

>>> new_zone.geometry = zone_extent

# We can add a centroid to the zone we just created by specifying its location or
# pass `None` to use the geometric center of the zone
>>> new_zone.add_centroid(Point(-71.33, -29.95))

# Let's refresh our fields
>>> project_zones.refresh_geo_index()

# And save the new changes in the project
>>> project_zones.save()

# Finally, to return a geopandas GeoDataFrame with the project zones
>>> zones = project_zones.data

# To get a Shapely Polygon or Multipolygon with the entire zoning coverage
>>> boundaries = project_zones.coverage()

# And to get the nearest zone to a given geometry
>>> project_zones.get_closest_zone(Point(-71.3336, -29.9490))
57

>>> project.close()

```

**See also**

- [aequilibræ.project.Zoning\(\)](#)  
Class documentation
- [Create a zone system based on Hex Bins](#)  
Usage example

**project.about**

This class provides an interface for editing the ‘about’ table of a project. We can add new fields or edit the existing ones as necessary, but everytime you add or modify a field, you have to write back this information, otherwise it will be lost.

```

>>> project = Project()
>>> project.open("/tmp/accessing_sfalls_data")

>>> project.about.add_info_field("my_new_field")
>>> project.about.my_new_field = "add some useful information about the field"

# We can add data to an existing field
>>> project.about.author = "Your Name"

# And save our modifications
>>> project.about.write_back()

# To assert if 'my_new_field' was added to the 'about' table, we can check the_
↪ characteristics

```

(continues on next page)

(continued from previous page)

```
# stored in the table by returning a list with all characteristics in the 'about'
↳table
>>> project.about.list_fields()
['model_name', ..., 'my_new_field']

# The 'about' table is created automatically when a project is created, but if you're
# loading a project created with an older AequilibraE version that didn't contain it,
# it is possible to create one too.
>>> project.about.create()

>>> project.close()
```

**See also**

- [aequilibrae.project.About\(\)](#)  
Class documentation
- [About table](#)  
Table documentation

**project.FieldEditor**

The `FieldEditor` allows the user to edit the project data tables, and it has two different purposes:

- Managing data tables, through the addition/deletion of fields
- Editing the tables' metadata (aka the description of each field)

This class is directly accessed from within the corresponding module one wants to edit.

```
>>> project = Project()
>>> project.open("/tmp/accessing_nauru_data")

# We'll edit the fields in the 'nodes' table
>>> node_fields = project.network.nodes.fields

# To add a new field to the 'nodes' table
>>> node_fields.add("my_new_field", "this is an example of AequilibraE's
↳functionalities", "TEXT")

# Don't forget to save these modifications
>>> node_fields.save()

# To edit the description of a field
>>> node_fields.osm_id = "number of the osm node_id"

# Or just to access the description of a field
>>> node_fields.modes
'Modes connected to the node'

# One can also check all the fields in the 'nodes' table.
>>> node_fields.all_fields()
['is_centroid', ..., 'my_new_field']
```

(continues on next page)

(continued from previous page)

```
>>> project.close()
```

All field descriptions are kept in the table 'attributes\_documentation'.

### See also

- [aequilibrae.project.FieldEditor\(\)](#)  
Class documentation

### project.log

Every AequibraE project contains a log file that holds information on all the project procedures. It is possible to access the log file contents, as presented in the next code block.

```
>>> project = Project()
>>> project.open("/tmp/accessing_nauru_data")

>>> project_log = project.log()

# Returns a list with all entires in the log file.
>>> print(project_log.contents())
['2021-01-01 15:52:03,945;aequilibrae;INFO ; Created project on D:/release/Sample_
↪models/nauru', ...]

# If your project's log is getting cluttered, it is possible to clear it.
# Use this option wiesly once the deletion of data in the log file can't be undone.
>>> project_log.clear()

>>> project.close()
```

### See also

- [aequilibrae.project.Log\(\)](#)  
Class documentation
- [Checking AequibraE's log](#)  
Usage example

### project.matrices

This method ia a gateway to all the matrices available in the model, which allows us to update the records in the 'matrices' table. Each item in the 'matrices' table is a MatrixRecord object.

```
>>> project = Project()
>>> project.open("/tmp/accessing_sfalls_data")

>>> matrices = project.matrices

# One can also check all the project matrices as a Pandas' DataFrame
```

(continues on next page)

(continued from previous page)

```

>>> matrices.list()

# We can add a new matrix
>>> matrices.new_record()

# To delete a matrix from the 'matrices' table, we can delete the record directly
>>> matrices.delete_record("demand_mc")

# or by selecting the matrix and deleting it
>>> mat_record = matrices.get_record("demand_omx")
>>> mat_record.delete()

# If you're unsure if you have a matrix in your project, you can check if it exists
# This function will return `True` or `False`
>>> matrices.check_exists("my_matrix")
False

# If a matrix was added or deleted by an external process, you should update or clean
# your 'matrices' table to keep your project organised.
>>> matrices.update_database() # in case of addition

>>> matrices.clear_database() # in case of deletion

# To reload the existing matrices in memory once again
>>> matrices.reload()

# Similar to the `get_record` function, we have the `get_matrix`, which allows you to
# get an AequilibraE matrix.
>>> matrices.get_matrix("demand_aem")

>>> project.close()

```

**See also**

- [\*aequilibrae.project.Matrices\(\)\*](#)  
Class documentation
- [\*Matrices table\*](#)  
Table documentation

**project.network.link\_types**

This method allows you to access the API resources to manipulate the 'link\_types' table. Each item in the 'link\_types' table is a LinkType object.

```

>>> project = Project()
>>> project.open("/tmp/accessing_coquimbo_data")

>>> link_types = project.network.link_types

>>> new_link_type = link_types.new("A") # Create a new LinkType with ID 'A'

```

(continues on next page)

(continued from previous page)

```

# We can add information to the LinkType we just created
>>> new_link_type.description = "This is a description"
>>> new_link_type.speed = 35
>>> new_link_type.link_type = "Arterial"

# To save the modifications for `new_link_type`
>>> new_link_type.save()

# To create a new field in the 'link_types' table, you can call the function `fields`
# to return a FieldEditor instance, which can be edited
>>> link_types.fields.add("my_new_field", "this is an example of AequilibraE's
↳funcionalities", "TEXT")

# You can also remove a LinkType from a project using its `link_type_id`
>>> link_types.delete("A")

# And don't forget to save the modifications you did in the 'link_types' table
>>> link_types.save()

# To check all `LinkTypes` in the project as a dictionary whose keys are the `link_
↳type_id`'s
>>> link_types.all_types()
{'z': <aequilibrae.project.network.link_type.LinkType object at 0x...>}

# There are two ways to get a LinkType from the 'link_types' table
# using the `link_type_id`
>>> get_link = link_types.get("p")

# or using the `link_type`
>>> get_link = link_types.get_by_name("primary")

>>> project.close()

```

**See also**

- [\*aequilibrae.project.network.LinkTypes\(\)\*](#)  
Class documentation
- [\*Link types table\*](#)  
Table documentation

**project.network.modes**

This method allows you to access the API resources to manipulate the 'modes' table. Each item in 'modes' table is a Mode object.

```

>>> project = Project()
>>> project.open("/tmp/accessing_coquimbo_data")

>>> modes = project.network.modes

```

(continues on next page)

(continued from previous page)

```

# We create a new mode
>>> new_mode = modes.new("k")
>>> new_mode.mode_name = "flying_car"

# And add it to the modes table
>>> modes.add(new_mode)

# When we add a new mode to the 'modes' table, it is automatically saved in the table
# But we can continue editing the modes, and save them as we modify them
>>> new_mode.description = "Like the one in the cartoons"
>>> new_mode.save()

# You can also remove a Mode from a project using its ``mode_id``
>>> modes.delete("k")

# To check all `Modes` in the project as a dictionary whose keys are the `mode_id`'s
>>> modes.all_modes()
{'b': <aequilibrae.project.network.mode.Mode object at 0x...>}

# There are two ways to get a Mode from the 'modes' table
# using the ``mode_id``
>>> get_mode = modes.get("c")

# or using the ``mode_name``
>>> get_mode = modes.get_by_name("car")

>>> project.close()

```

**See also**

- [aequilibrae.project.network.Modes\(\)](#)  
Class documentation
- [Modes table](#)  
Table documentation

**project.network.periods**

This method allows you to access the API resources to manipulate the ‘periods’ table. Each item in the ‘periods’ table is a `Period` object.

```

>>> project = Project()
>>> project.open("/tmp/accessing_coquimbo_data")

>>> periods = project.network.periods

# Let's add a new field to our 'periods' table
>>> periods.fields.add("my_field", "This is field description", "TEXT")

# To save this modification, we must refresh the table

```

(continues on next page)

(continued from previous page)

```

>>> periods.refresh_fields()

# Let's get our default period and change the description for our new field
>>> select_period = periods.get(1)
>>> select_period.my_field = "hello world"

# And we save this period modification
>>> select_period.save()

# To see all periods data as a Pandas' DataFrame
>>> all_periods = periods.data

# To add a new period
>>> new_period = periods.new_period(2, 21600, 43200, "6AM to noon")

# It is also possible to renumber a period
>>> new_period.renumber(9)

# And check the existing data fields for each period
>>> new_period.data_fields()
['period_id', 'period_start', 'period_end', 'period_description', 'my_field']

# Saving can be done after finishing all modifications in the table but for the sake
# of this example, we'll save the addition of a new period to our table right away
>>> periods.save()

>>> project.close()

```

**See also**

- [aequilibrae.project.network.Periods\(\)](#)  
Class documentation
- [Periods table](#)  
Table documentation

**AequibraE Matrix**

AequibraE matrices are very useful objects that allow you to make the most with AequibraE. In the following sections, we'll cover the main points regarding them.

**AequibraeMatrix**

This class allows the creation of a memory instance for a matrix, that can be used to load an existing matrix to the project, or to create a new one.

There are three ways of creating an `AequibraeMatrix`:

- from an OMX file;
- from a trip list, which is nothing more than a CSV file containing the origins, destinations, and trip cores;
- from an empty matrix. In this case, the data type must be one of the following NumPy data types: `np.int32`, `np.int64`, `np.float32`, `np.float64`.

```
>>> from aequibrae.matrix import AequibraeMatrix

>>> file = os.path.join(my_folder_path, "path_to_my_matrix.aem")
>>> num_zones = 5
>>> index = np.arange(1, 6, dtype=np.int32)
>>> mtx = np.ones((5, 5), dtype=np.float32)
>>> names = ["only_ones"]

>>> mat = AequibraeMatrix()
>>> mat.create_empty(file_name=file, zones=num_zones, matrix_names=names)

# `memory_only` parameter can be changed to `True` case you want to save the matrix_
↳in disk.

# Adds the matrix indexes, which are going to be used for computation
>>> mat.index[:] = index[:]

# Adds the matricial data stored in `mtx` to a matrix named "only_ones"
>>> mat.matrix["only_ones"][:, :] = mtx[:, :]
```

The following methods allow you to check the data in you AequibraE matrix.

```
>>> mat.cores # displays the number of cores in the matrix
1

>>> mat.names # displays the names of the matrices
['only_ones']

>>> mat.index # displays the IDs of the indexes
array([1, 2, 3, 4, 5])

# To return an array with the selected matrix data
>>> mat.get_matrix("only_ones")
array([[1., 1., 1., 1., 1.],
       [1., 1., 1., 1., 1.],
       [1., 1., 1., 1., 1.],
       [1., 1., 1., 1., 1.],
       [1., 1., 1., 1., 1.]])
```

More than storing project data, AequibraE matrices are objects necessary to run procedures, such as traffic assignment. To do so, one must create a computational view of the matrix, which allows AequibraE matrices to be used in parallelized algorithms. It is possible to create a computational view for more than one matrix at a time.

Case you're using matricial data from an OMX file, this step is mandatory to load the data to memory, otherwise the matrix is useless in other procedures.

```
>>> mat.computational_view(["only_ones"])
```

You can also export AequibraE matrices to another file formats, such as CSV and OMX. When exporting to a OMX file, you can choose the cores os the matrix you want to save, although this is not the case for CSV file, in which all cores will be exported as separate columns in the output file.

```
>>> mat.export(os.path.join(my_folder_path, 'my_new_omx_file.omx'))
```

(continues on next page)

(continued from previous page)

```
>>> mat.export(os.path.join(my_folder_path, 'my_new_csv_file.csv'))
```

The `export` method also allows you to change your mind and save your AequilibraE matrix into an AEM file, if it's only in memory.

```
>>> mat.export(os.path.join(my_folder_path, 'my_new_aem_file.aem'))
```

To avoid errors, once open, the same AequilibraE matrix can only be used once at a time in different procedures. To do so, you have to close the matrix, to remove it from memory and flush the data to disk, or to close the OMX file, if that's the case.

```
>>> mat.close()
```

AequilibraE matrices in disk can be reused and loaded once again.

```
>>> mat = AequilibraeMatrix()
>>> mat.load(os.path.join(my_folder_path, 'my_new_aem_file.aem'))

>>> mat.get_matrix("only_ones")
memmap([[1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.]])
```

### Important

File extension for AequilibraE matrices is **AEM**.

### See also

[`aequilibrae.matrix.AequilibraeMatrix\(\)`](#)  
Class documentation

[\*Traffic Assignment without an AequilibraE Model\*](#)  
Usage example

## OpenMatrix (OMX)

AequilibraE can handle OMX files, but if you're wondering what is OMX and what does it stand for, this section is for you. The text in this section is borrowed from [OpenMatrix Wiki page](#).

The OpenMatrix file format (or simply OMX) is a standard matrix format for storing and transferring matrix data across different models and software packages, intended to make the model development easier. It is a file capable of storing more than one matrices at a time, including multiple indexes/lookups, and attributes (key/value pairs) for matrices and indexes.

There are APIs in different programming languages that allow you to use OMX. In Python, we use `omx-python` library. In its project page, you can find a [brief tutorial](#) to OMX, and better understand how does it work.

Creating an AequilibraE matrix from an OMX file is pretty straightforward.

```
>>> file_path = os.path.join(my_folder_path, "path_to_new_matrix.aem")
>>> omx_path = os.path.join(my_folder_path, "my_new_omx_file.omx")

>>> omx_mat = AequilibraeMatrix()
>>> omx_mat.create_from_omx(omx_path, file_path)

>>> mat.get_matrix("only_ones")
memmap([[1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.],
        [1., 1., 1., 1., 1.]])
```

## 2.2.7 Examples

### AequilibraE Project

#### Avoiding the automatic download of SpatiaLite binaries on Windows

In this example, we show how to prevent Windows from downloading the SpatiaLite binaries automatically.

This may be relevant to users in corporate environments where the download and use of binaries to the Windows temporary is restricted.

Spatialite Logo by Massimo Zedda, image from <https://www.gaia-gis.it/>

```
# Imports
import os
from os.path import join
from tempfile import gettempdir
from uuid import uuid4

from aequilibrae.utils.create_example import create_example

from aequilibrae.utils.spatialite_utils import set_known_spatialite_folder, ensure_
↳spatialite_binaries

# First we prevent Windows from downloading spatialite binaries during this session
# THIS VALUE MUST BE UPPER CASE TO BE EFFECTIVE
os.environ["AEQ_SPATIALITE_DIR"] = r"C:\path\to\existing\download"
```

Now we can go about our business as usual

```
project = create_example(join(gettempdir(), uuid4().hex))
project.close()
```

#### Logging to terminal

In this example, we show how to make all log messages show in the terminal.

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
```

(continues on next page)

(continued from previous page)

```

from os.path import join
from aequilibrae.utils.create_example import create_example
import logging
import sys

```

```

# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)
project = create_example(fldr)
logger = project.logger

```

With the project open, we can tell the logger to direct all messages to the terminal as well

```

stdout_handler = logging.StreamHandler(sys.stdout)
formatter = logging.Formatter("%(asctime)s;%(levelname)s ; %(message)s")
stdout_handler.setFormatter(formatter)
logger.addHandler(stdout_handler)

```

```

project.close()

```

## Checking AequilibraE's log

AequilibraE's log is a very useful tool to get more information about what the software is doing under the hood.

Information such as Traffic Class and Traffic Assignment stats, and Traffic Assignment outputs. If you have created your project's network from OSM, you will also find information on the number of nodes, links, and the query performed to obtain the data.

In this example, we'll use Sioux Falls data to check the logs, but we strongly encourage you to go ahead and download a place of your choice and perform a traffic assignment!

```

# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from aequilibrae.utils.create_example import create_example
from aequilibrae.paths import TrafficAssignment, TrafficClass

```

```

# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)
project = create_example(fldr)

```

We build our graphs

```

project.network.build_graphs()

graph = project.network.graphs["c"]
graph.set_graph("free_flow_time")
graph.set_skimming(["free_flow_time", "distance"])
graph.set_blocked_centroid_flows(False)

```

We get our demand matrix from the project and create a computational view

```
proj_matrices = project.matrices
demand = proj_matrices.get_matrix("demand_omx")
demand.computational_view(["matrix"])
```

Now let's perform our traffic assignment

```
assig = TrafficAssignment()

assigclass = TrafficClass(name="car", graph=graph, matrix=demand)

assig.add_class(assigclass)
assig.set_vdf("BPR")
assig.set_vdf_parameters({"alpha": 0.15, "beta": 4.0})
assig.set_capacity_field("capacity")
assig.set_time_field("free_flow_time")
assig.set_algorithm("bfgw")
assig.max_iter = 50
assig.rgap_target = 0.001

assig.execute()
```

```
with open(join(fldr, "aequilibrae.log")) as file:
    for idx, line in enumerate(file):
        print(idx + 1, "-", line)
```

In lines 1-7, we receive some warnings that our fields name and lane have NaN values. As they are not relevant to our example, we can move on.

In lines 8-9 we get the Traffic Class specifications. We can see that there is only one traffic class (car). Its **graph** key presents information on blocked flow through centroids, number of centroids, links, and nodes. In the **matrix** key, we find information on where in the disk the matrix file is located. We also have information on the number of centroids and nodes, as well as on the matrix/matrices used for computation. In our example, we only have one matrix named matrix, and the total sum of this matrix element is equal to 360,600. If you have more than one matrix its data will be also displayed in the *matrix\_cores* and *matrix\_totals* keys.

In lines 10-11 the log shows the Traffic Assignment specifications. We can see that the VDF parameters, VDF function, capacity and time fields, algorithm, maximum number of iterations, and target gap are just like the ones we set previously. The only information that might be new to you is the number of cores used for computation. If you haven't set any, AequilibraE is going to use the largest number of CPU threads available.

Line 12 displays us a warning to indicate that AequilibraE is converting the data type of the cost field.

Lines 13-61 indicate that we'll receive the outputs of a *bfgw* algorithm. In the log there are also the number of the iteration, its relative gap, and the stepsize. The outputs in lines 15-60 are exactly the same as the ones provided by the function `assig.report()`. Finally, the last line shows us that the *bfgw* assignment has finished after 46 iterations because its gap is smaller than the threshold we configured (0.001).

In case you execute a new traffic assignment using different classes or changing the parameters values, these new specification values would be stored in the log file as well so you can always keep a record of what you have been doing. One last reminder is that if we had created our project from OSM, the lines on top of the log would have been different to display information on the queries done to the server to obtain the data.

Log image by [OSRS Wiki](#)

## RUN MODULE

AequilibraE provides a convenient method for defining model entry points and their default arguments via `run/__init__.py` and `parameters.yml` respectively. These can be used to couple model parameters and methods to run models to the model itself.

### 3.1 `run/__init__.py`

The run module is a standard Python module that is dynamically imported when the `project.run` property is accessed. Objects named within `parameters.yml` under the `run` heading will have their arguments partially applied via `functools.partial` and will replace the objects within the module.

Not all objects within the module must be named `parameters.yml`. If an object is named within `parameters.yml`, then it must exist within the module otherwise a `RuntimeError` will be raised.

By default an AequilibraE project comes with four example functions: `matrix_summary`, `graph_summary`, `results_summary`, and `example_function_with_kwargs`. The summary functions are not named within the default `parameters.yml` as they take no arguments.

Functions should use the `get_active_project()` function to obtain a reference to the current project.

State within the module should be avoided as the file may be run multiple times.

#### 3.1.1 Examples

##### Run module

##### Run module

In this example we demonstrate how to use AequilibraE's run module using Sioux Falls example.

##### References

- *Run module*
- *Run*

##### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Project.run`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

from aequilibrae.parameters import Parameters
from aequilibrae.utils.create_example import create_example
```

```
# Let's create the Sioux Falls example in an arbitrary folder.
folder = join(gettempdir(), uuid4().hex)

project = create_example(folder)
```

First, let's check the matrix information using `matrix_summary()`. This method provides us useful information such as the matrix total, minimum and maximum values in the array, and the number of non-empty pairs in the matrix.

Notice that the matrix summary is presented for each matrix core.

```
project.run.matrix_summary()
```

If our matrices folder is empty, instead of a nested dictionary of data, AequilibraE run would return an empty dictionary.

Let's create a graph for mode *car*.

```
mode = "c"
```

```
network = project.network
network.build_graphs(modes=[mode])
graph = network.graphs[mode]
graph.set_graph("distance")
graph.set_skimming("distance")
graph.set_blocked_centroid_flows(False)
```

With the method `graph_summary()`, we can check the total number of links, nodes, and zones, as well as the compact number of links and nodes used for computation. If we had more than one graph, its information would be displayed within the nested dictionary.

```
project.run.graph_summary()
```

If no graphs have been built, an empty dictionary will be returned.

Let's add a `create_delaunay` function to our `run/__init__.py` file.

This function replicates the example in which we *create Delaunay lines*.

```
func_string = """
def create_delaunay(source: str, name: str, computational_view: str, result_name: str,
→ overwrite: bool=False):\n
\tfrom aequilibrae.utils.create_delaunay_network import DelaunayAnalysis\n
\tproject = get_active_project()\n
\tmatrix = project.matrices\n
\tmat = matrix.get_matrix(name)\n
\tmat.computational_view(computational_view)\n
\ttda = DelaunayAnalysis(project)\n
\ttda.create_network(source, overwrite)\n
```

(continues on next page)

(continued from previous page)

```
\tda.assign_matrix(mat, result_name)\n
"""
```

```
with open(join(folder, "run", "__init__.py"), "a") as file:
    file.write("\n")
    file.write(func_string)
```

Now we add new parameters to our model

```
p = Parameters(project)
p.parameters["run"]["create_delaunay"] = {}
p.parameters["run"]["create_delaunay"]["source"] = "zones"
p.parameters["run"]["create_delaunay"]["name"] = "demand_omx"
p.parameters["run"]["create_delaunay"]["computational_view"] = "matrix"
p.parameters["run"]["create_delaunay"]["result_name"] = "my_run_module_example"
p.write_back()
```

And we run the function

```
project.run.create_delaunay()
```

#### Note

To run the `create_delaunay` function we created above without argument values, we must insert the values as a project parameter. Adding an unused parameter to the `parameters.yml` file will raise an execution error.

Creating Delaunay lines also creates a `results_database.sqlite` that contains the result of the all-or-nothing algorithm that generated the output. We can check the existing results in the `results_database` using the `results_summary` method.

```
project.run.results_summary()
```

Let's check what our Delaunay lines look like!

```
import sqlite3
import pandas as pd
import geopandas as gpd
```

Let's retrieve the results

```
res_path = join(project.project_base_path, "results_database.sqlite")
conn = sqlite3.connect(res_path)

results = pd.read_sql("SELECT * FROM my_run_module_example", conn).set_index("link_id",
↳")
```

```
with project.db_connection as conn:
    links = gpd.read_postgis(
        "SELECT link_id, st_asBinary(geometry) geometry FROM delaunay_network", conn,
↳geom_col="geometry", crs=4326
```

(continues on next page)

(continued from previous page)

```
)  
links.set_index("link_id", inplace=True)
```

```
df = links.join(results)  
max_vol = df.matrix_tot.max()
```

And finally plot the data

```
df.plot(linewidth=5 * df["matrix_tot"] / max_vol, color="blue")
```

```
project.close()
```

Pipeline image credits to [Data-pipeline icons created by Vectors Tank - Flaticon](#)

## NETWORK MANIPULATION

In this section, we discuss how can we import and export data to/from an AequilibraE project. Besides, important concepts on geometry manipulation are presented. Finally, some examples that involve project creation, edition of links and nodes, and identification of disconnected links for network clean up are presented.

### 4.1 Importing and exporting the network

Currently AequilibraE can import links and nodes from a network from OpenStreetMaps, GMNS, and from link layers. AequilibraE can also export the existing network into GMNS format. There is some valuable information on these topics in the following sections.

#### 4.1.1 Importing from OpenStreetMap

You can check more specifications on OSM download on the *Parameters YAML File*.

##### Note

All links that cannot be imported due to errors in the SQL insert statements are written to the log file with error message AND the SQL statement itself, and therefore errors in import can be analyzed for re-downloading or fixed by re-running the failed SQL statements after manual fixing.

#### Python limitations

As it happens in other cases, Python's usual implementation of SQLite is incomplete, and does not include R-Tree, a key extension used by SpatiaLite for GIS operations.

If you want to learn a little more about this topic, you can access this [blog post](#) or check out the SQLite page on [R-Tree](#).

This limitation issue is solved when installing SpatiaLite, as shown in [the dependencies page](#).

Please also note that AequilibraE's network consistency triggers **will NOT work** before spatial indices have been created and/or if the editing is being done on a platform that does not support both R-Tree and SpatiaLite.

##### See also


- [aequilibrae.project.Network.create\\_from\\_osm\(\)](#)  
Function documentation
- [Create project from OpenStreetMap](#)  
Usage example

## 4.1.2 Importing from link layer

It is possible to create an Aequilibræ project from a link layer, such as a \*.csv file that contains geometry in WKT, for instance. You can check an example with all functions used in *the following example*.

## 4.1.3 Importing from files in GMNS format

Before importing a network from a source in GMNS format, it is imperative to know in which spatial reference its geometries (links and nodes) were created. If the SRID is different than 4326, it must be passed as an input using the argument `srid`.

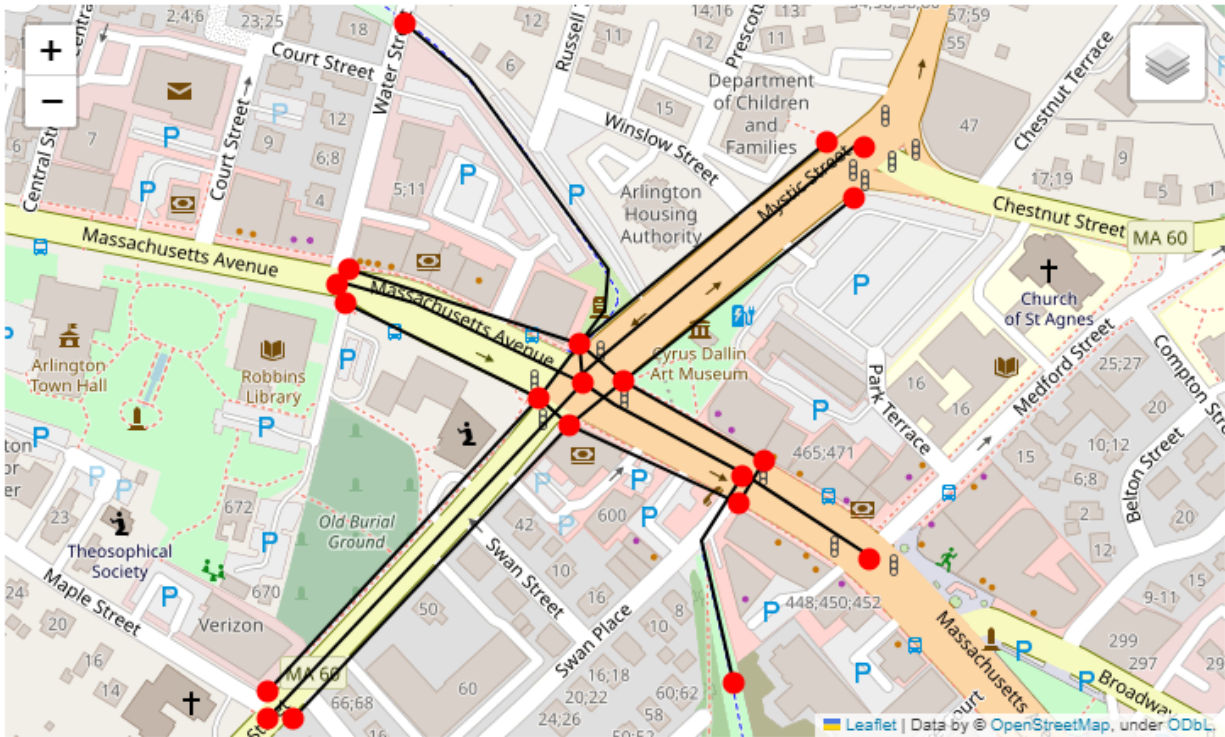

It is possible to import the following files from a GMNS source:

- link table;
- node table;
- use\_group table;
- geometry table.

You can find the specification for all these tables in the GMNS documentation, [here](#).

By default, the method `create_from_gmns()` read all required and optional fields specified in the GMNS link and node tables specification. If you need it to read any additional fields as well, you have to modify the Aequilibræ parameters as shown in the *example*.

When adding a new field to be read in the `parameters.yml` file, it is important to keep the “required” key set to `False`, since you will always be adding a non-required field. Required fields for a specific table are only those defined in the GMNS specification.

### Note


In the Aequilibræ nodes table, if a node is to be identified as a centroid, its 'is\_centroid' field has to be set to 1. However, this is not part of the GMNS specification. Thus, if you want a node to be identified as a centroid during the import process, in the GMNS node table you have to set the field 'node\_type' equals to 'centroid'.

#### See also

- `aequilibræ.project.Network.create_from_gmns()`  
Function documentation
- *Create project from GMNS*  
Usage example

### 4.1.4 Exporting Aequilibræ model to GMNS format

After loading an existing Aequilibræ project, you can export it to GMNS format.

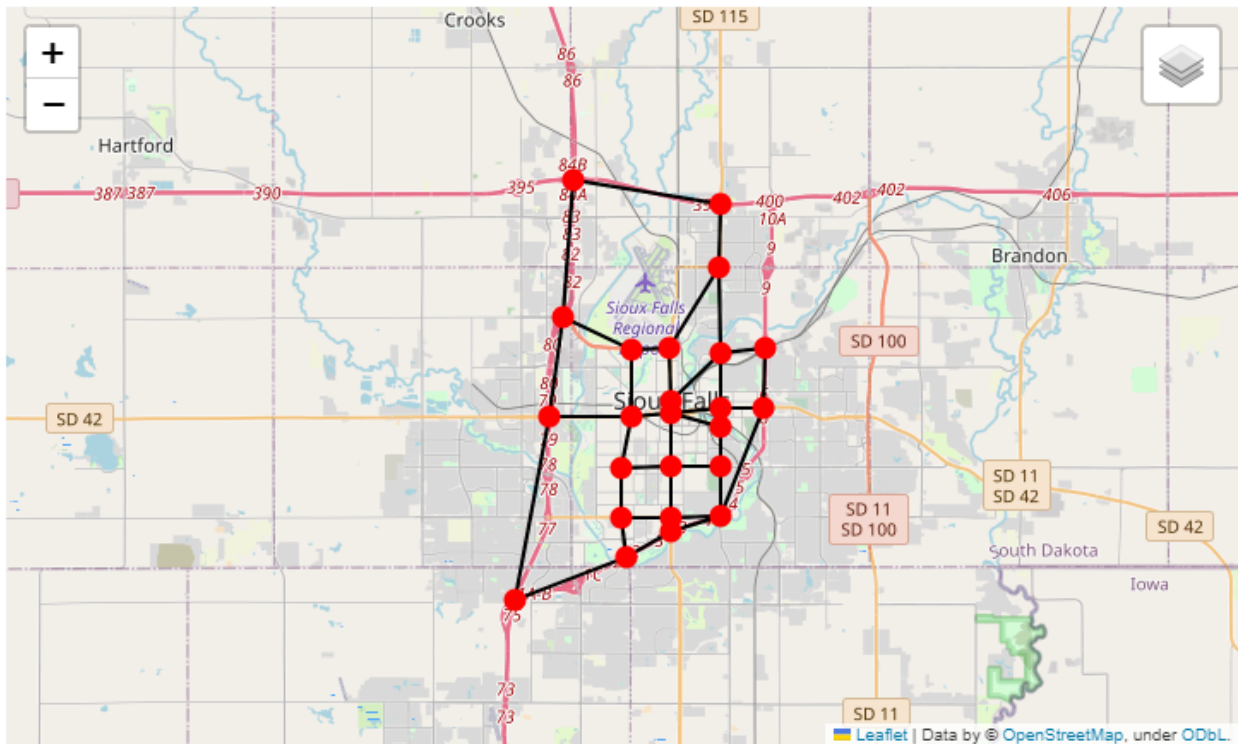

It is possible to export an Aequilibræ network to the following tables in GMNS format:

- link table
- node table
- use\_definition table

This list does not include the optional 'use\_group' table, which is an optional argument of the GMNS function, because mode groups are not used in the Aequilibræ modes table.

In addition to all GMNS required fields for each of the three exported tables, some other fields are also added as reminder of where the features came from when looking back at the Aequilibræ project.

### Note

When a node is identified as a centroid in the AequilibraE nodes table, this information is transmitted to the GMNS node table by means of the field 'node\_type', which is set to 'centroid' in this case. The 'node\_type' field is an optional field listed in the GMNS node table specification.

You can find the GMNS specification [here](#).

### See also

- [aequilibrae.project.Network.export\\_to\\_gmns\(\)](#)  
Function documentation
- [Exporting network to GMNS](#)  
Usage example

## 4.2 Dealing with Geometries

Geometry is a key feature when dealing with transportation infrastructure and actual travel. For this reason, all datasets in AequilibraE that correspond to elements with physical GIS representation, links and nodes in particular, are geo-enabled.

This also means that the AequilibraE API needs to provide an interface to manipulate each element's geometry in a convenient way. This is done using the standard [Shapely](#), and we urge you to study its comprehensive API before attempting to edit a feature's geometry in memory.

As we mentioned in other sections of the documentation, the user is also welcome to use its powerful tools to manipulate your model's geometries, although that is not recommended, as the "training wheels are off".

### 4.2.1 Data consistency

Data consistency is not achieved as a monolithic piece, but rather through the *treatment* of specific changes to each aspect of all the objects being considered (i.e. nodes and links) and the expected consequence to other tables/elements. To this effect, AequilibraE has triggers covering a comprehensive set of possible operations for links and nodes, covering both spatial and tabular aspects of the data.

Although the behaviour of these trigger is expected to be mostly intuitive to anybody used to editing transportation networks within commercial modeling platforms, we have detailed the behaviour for all different network changes.

This implementation choice is not, however, free of caveats. Due to technological limitations of SQLite, some of the desired behaviors identified cannot be implemented, but such caveats do not impact the usefulness of this implementation or its robustness in face of minimally careful use of the tool.

### Note

This documentation, as well as the SQL code it refers to, comes from the seminal work done in [TranspoNet](#) by [Pedro](#) and [Andrew](#).

### 4.2.2 Network consistency behaviour

In order for the implementation of this standard to be successful, it is necessary to map all the possible user-driven changes to the underlying data and the behavior the SQLite database needs to demonstrate in order to maintain consistency of the data. The detailed expected behavior is detailed below. As each item in the network is edited, a series of checks and changes to other components are necessary in order to keep the network as a whole consistent. In this section we list all

the possible physical (geometrical) changes to each element of the network and what behavior (consequences) we expect from each one of these changes.

Our implementation, in the form of a SQLite database, will be referred to as network from this point on.

Ensuring data consistency as each portion of the data is edited is a two part problem:

1. Knowing what to do when a certain edit is attempted by the user
2. Automatically applying the tests and consistency checks (and changes) required on one

The table below presents all meaningful operations that a user can do to links and nodes, and you can use the table below to navigate between each of the changes to see how they are treated through triggers.

Nodes	Links	Fields
<i>Creating a node</i>	<i>Deleting a link</i>	<i>Link distance</i>
<i>Deleting a node</i>	<i>Moving a link extremity</i>	<i>Link direction</i>
<i>Moving a node</i>	<i>Re-shaping a link</i>	<i>Field 'modes' (links and nodes layers)</i>
<i>Adding a data field</i>	<i>Deleting a required field</i>	<i>Fields 'link_type' (links layer) &amp; 'link_types' (nodes layer)</i>
<i>Deleting a data field</i>		<i>Fields 'a_node' and 'b_node'</i>
<i>Modifying a data entry</i>		

### Node layer changes and expected behavior

There are 6 possible changes envisioned for the network nodes layer, being 3 of geographic nature and 3 of data-only nature. The possible variations for each change are also discussed, and all the points where alternative behavior is conceivable are also explored.

#### Creating a node

There are only three situations when a node is to be created:

- Placement of a link extremity (new or moved) at a position where no node already exists
- Splitting a link in the middle
- Creation of a centroid for later connection to the network

In all cases a unique node ID needs to be generated for the new node, and all other node fields should be empty.

An alternative behavior would be to allow the user to create nodes with no attached links. Although this would not result in inconsistent networks for traffic and transit assignments, this behavior would not be considered valid. All other edits that result in the creation of unconnected nodes or that result in such case should result in an error that prevents such operation

Behavior regarding the fields regarding modes and link types is discussed in their respective table descriptions

#### Deleting a node

Deleting a node is only allowed in two situations:

- No link is connected to such node (in this case, the deletion of the node should be handled automatically when no link is left connected to such node)
- When only two links are connected to such node. In this case, those two links will be merged, and a standard operation for computing the value of each field will be applied.

For simplicity, the operations are: Weighted average for all numeric fields, copying the fields from the longest link for all non-numeric fields. Length is to be recomputed in the native distance measure of distance for the projection being used.

A node can only be eliminated as a consequence of all links that terminated/ originated at it being eliminated. If the user tries to delete a node, the network should return an error and not perform such operation.

Behavior regarding the fields regarding modes and link types is discussed in their respective table descriptions

### Moving a node

There are two possibilities for moving a node: moving to an empty space, and moving on top of another node.

- If a node is moved to an empty space, all links originated/ending at that node will have its shape altered to conform to that new node position and keep the network connected. The alteration of the link happens only by changing the latitude and longitude of the link extremity associated with that node.
- If a node is moved on top of another node, all the links that connected to the node on the bottom have their extremities switched to the node on top. The node on the bottom gets eliminated as a consequence of the behavior listed on *Deleting a node*.

Behavior regarding the fields related to modes and link types is discussed in their respective table descriptions.

#### See also

- *Editing network nodes*  
Usage example

### Adding a data field

No consistency check is needed other than ensuring that no repeated data field names exist.

### Deleting a data field

If the data field whose attempted deletion is mandatory, the network should return an error and not perform such operation. Otherwise the operation can be performed.

### Modifying a data entry

If the field being edited is the `node_id` field, then all the related tables need to be edited as well (e.g. `a_b` and `b_node` in the link layer, the `node_id` tagged to turn restrictions and to transit stops).

### Link layer changes and expected behavior

Network links layer also has some possible changes of geographic and data-only nature.

### Deleting a link

In case a link is deleted, it is necessary to check for orphan nodes, and deal with them as prescribed in *Deleting a node*. In case one of the link extremities is a centroid (i.e. field `is_centroid=1`), then the node should not be deleted even if orphaned.

Behavior regarding the fields regarding modes and link types is discussed in their respective table descriptions.

### Moving a link extremity

This change can happen in two different forms:

- The link extremity is moved to an empty space - In this case, a new node needs to be created, according to the behavior described in *Creating a node*. The information of node ID (A or B node, depending on the extremity) needs to be updated according to the ID for the new node created.
- The link extremity is moved from one node to another - The information of node ID (A or B node, depending on the extremity) needs to be updated according to the ID for the node the link now terminates in. Behavior regarding the fields regarding modes and link types is discussed in their respective table descriptions.

#### See also

- *Editing network links*  
Usage example

### Re-shaping a link

When reshaping a link, the only thing other than we expect to be updated in the link database is their length (or distance, in AequilibraE's field structure). As of now, distance in AequilibraE is **ALWAYS** measured in meters.

#### See also

- *Splitting network links*  
Usage example

### Deleting a required field

Unfortunately, SQLite does not have the resources to prevent a user to remove a data field from the table. For this reason, if the user removes a required field, they will most likely corrupt the project.

### Field-specific data consistency

Some data fields are specially sensitive to user changes.

#### Link distance

Link distance cannot be changed by the user, as it is automatically recalculated using the Spatialite function `GeodesicLength`, which always returns distances in meters.

#### Link direction

Triggers enforce link direction to be -1, 0 or 1, and any other value results in an SQL exception.

#### Field 'modes' (links and nodes layers)

A series of triggers are associated with the modes field, and they are all described in the *Modes table*.

#### Fields 'link\_type' (links layer) & 'link\_types' (nodes layer)

A series of triggers are associated with the modes field, and they are all described in the *Link types table*.

### Fields 'a\_node' and 'b\_node'

The user should not change the a\_node and b\_node fields, as they are controlled by the triggers that govern the consistency between links and nodes. It is not possible to enforce that users do not change these two fields, as it is not possible to choose the trigger application sequence in SQLite.

## 4.3 Examples

### 4.3.1 Network Manipulation

#### Create project from OpenStreetMap

In this example, we show how to create an empty project and populate it with a network from OpenStreetMap.

This time we will use GeoPandas to visualize the network.

#### References

- *Importing from OpenStreetMap*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Network.create_from_osm()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

from aequilibrae import Project
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

project = Project()
project.new(fldr)
```

Now we can download the network from any place in the world (as long as you have memory for all the download and data wrangling that will be done).

We can create from a bounding box or a named place. For the sake of this example, we will choose the small nation of Nauru.

```
project.network.create_from_osm(place_name="Nauru")
```

We can also choose to create a model from a polygon (which must be in EPSG:4326) or from a Polygon defined by a bounding box, for example.

```
# project.network.create_from_osm(model_area=box(-112.185, 36.59, -112.179, 36.60))
```

We grab all the links data as a geopandas GeoDataFrame so we can process it easier

```
links = project.network.links.data
```

Let's plot our network!

```
links.explore(color="blue", style_kwds={"weight": 2}, tooltip="link_type")
```

```
project.close()
```

### Editing network geometry: Nodes

In this example, we show how to move a node in the network and look into what happens to the links.

#### References

- *Node layer changes and expected behavior*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.network.Nodes()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from aequilibrae.utils.create_example import create_example
from shapely.geometry import Point
import matplotlib.pyplot as plt
```

```
# We create the example project inside our temp folder.
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
```

Let's move node one from the upper left corner of the image above, a bit to the left and to the bottom.

```
# We also add the node we want to move.
all_nodes = project.network.nodes
links = project.network.links
node = all_nodes.get(1)
new_geo = Point(node.geometry.x + 0.02, node.geometry.y - 0.02)
node.geometry = new_geo

# We can save changes for all nodes we have edited so far.
node.save()
```

If you want to show the path in Python.

We do NOT recommend this, though.... It is very slow for real networks.

```
# Let's refresh the links in memory for usage
links.refresh()
```

Let's access our links data using a context manager instead of directly accessing the DataFrame.

```
with project.db_connection as conn:
    link_ids = conn.execute("Select link_id from links;").fetchall()

for lid in link_ids:
    geo = links.get(lid[0]).geometry
    plt.plot(*geo.xy, color="blue")

plt.plot(*node.geometry.xy, "o", color="black")

plt.show()
```

Did you notice the links are matching the node? Look at the original network and see how it used to look like.

```
project.close()
```

### Exporting network to GMNS

In this example, we export a simple network to GMNS format. The source AequilibraE model used as input for this is the result of the import process (`create_from_gmns()`) using the GMNS example of Arlington Signals, which can be found in the GMNS repository on GitHub: <https://github.com/zephyr-data-specs/GMNS>

#### References

- *Exporting AequilibraE model to GMNS format*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Network.export_to_gmns()`

```
# Imports
from uuid import uuid4
import os
from tempfile import gettempdir

from aequilibrae.utils.create_example import create_example
import folium
import geopandas as gpd
import pandas as pd
```

```
# We load the example project inside a temp folder
fldr = os.path.join(gettempdir(), uuid4().hex)

project = create_example(fldr)
```

We export the network to CSV files in GMNS format, that will be saved inside the project folder

```
output_fldr = os.path.join(gettempdir(), uuid4().hex)
if not os.path.exists(output_fldr):
    os.mkdir(output_fldr)

project.network.export_to_gmns(path=output_fldr)
```

Now, let's plot a map. This map can be compared with the images of the README.md file located in this example repository on GitHub: [https://github.com/zephyr-data-specs/GMNS/blob/develop/examples/Arlington\\_Signals/README.md](https://github.com/zephyr-data-specs/GMNS/blob/develop/examples/Arlington_Signals/README.md)

```
links = pd.read_csv(os.path.join(output_fldr, "link.csv"))
nodes = pd.read_csv(os.path.join(output_fldr, "node.csv"))
```

We turn the links and nodes DataFrames into GeoDataFrames so we can plot them more easily.

```
links = gpd.GeoDataFrame(links, geometry=gpd.GeoSeries.from_wkt(links["geometry"], ↵
↵crs=4326)
nodes = gpd.GeoDataFrame(nodes, geometry=gpd.GeoSeries.from_xy(nodes["x_coord"], ↵
↵nodes["y_coord"]), crs=4326)
```

Let's plot our map!

```
map = links.explore(color="black", style_kwds={"weight": 2}, tool_tip="link_type", ↵
↵name="links")
map = nodes.explore(m=map, color="red", style_kwds={"radius": 5, "fillOpacity": 1.0}, ↵
↵name="nodes")

folium.LayerControl().add_to(map) # Add a layer control button to our map
map
```

```
project.close()
```

## Editing network geometry: Links

In this example, we move a link extremity from one point to another and see what happens to the network.

### References

- *Link layer changes and expected behavior*

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.network.Links()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
```

(continues on next page)

(continued from previous page)

```
from os.path import join
from aequilibrae.utils.create_example import create_example
from shapely.geometry import LineString, Point
import matplotlib.pyplot as plt
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
```

```
all_nodes = project.network.nodes
links = project.network.links
```

Let's move node one from the upper left corner of the image above, a bit to the left and to the bottom

```
# We edit the link that goes from node 1 to node 2
link = links.get(1)
node = all_nodes.get(1)
new_extremity = Point(node.geometry.x + 0.02, node.geometry.y - 0.02)
link.geometry = LineString([node.geometry, new_extremity])

# and the link that goes from node 2 to node 1
link = links.get(3)
node2 = all_nodes.get(2)
link.geometry = LineString([new_extremity, node2.geometry])

# We save the changes and refresh the links in memory for usage
links.save()
links.refresh()
```

Because each link is unidirectional, you can no longer go from node 1 to node 2, obviously.

We do NOT recommend this, though.... It is very slow for real networks.

```
link_ids = links.data["link_id"].values.tolist()
for lid in link_ids:
    geo = links.get(lid).geometry
    plt.plot(*geo.xy, color="blue")

node_ids = all_nodes.data["node_id"].values.tolist()
for nid in node_ids:
    geo = all_nodes.get(nid).geometry
    plt.plot(*geo.xy, "o", color="black")

plt.show()
```

Now look at the network and how it used to be.

```
project.close()
```

## Exploring the network on a notebook

In this example, we show how to use Folium to plot a network for different modes.

We will need Folium for this example, and we will focus on creating a layer for each mode in the network, a layer for all links and a layer for all nodes.

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

from aequilibrae.utils.create_example import create_example
import folium
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

# Let's use the Nauru example project for display
project = create_example(fldr, "nauru")
```

We grab all the links data as a geopandas GeoDataFrame so we can process it easier

```
links = project.network.links.data
nodes = project.network.nodes.data
```

And if you want to take a quick look in your GeoDataFrames, you can plot it!

```
# links.plot()
```

Let's create copies of our link layers for each mode

```
bike = links[links["modes"].str.contains("b")]
car = links[links["modes"].str.contains("c")]
transit = links[links["modes"].str.contains("t")]
walk = links[links["modes"].str.contains("w")]
```

And plot out data!

```
map = links.explore(color="gray", style_kwds={"weight": 2}, popup="link_id", tooltip=
↳ "modes", name="network_links")
map = nodes.explore(m=map, color="black", style_kwds={"radius": 5, "fillOpacity": 1.0}
↳, name="network_nodes")

map = walk.explore(m=map, color="green", style_kwds={"weight": 3}, popup="link_id",
↳ tooltip="modes", name="walk")
map = bike.explore(m=map, color="green", style_kwds={"weight": 3}, popup="link_id",
↳ tooltip="modes", name="bike")
map = car.explore(m=map, color="red", style_kwds={"weight": 3}, popup="link_id",
↳ tooltip="modes", name="car")
map = transit.explore(m=map, color="yellow", style_kwds={"weight": 3}, popup="link_id
↳", tooltip="modes", name="transit")

folium.LayerControl().add_to(map)
map
```

```
project.close()
```

### Editing network geometry: Splitting link

In this example, we split a link right in the middle, while keeping all fields in the database equal. Distance is proportionally computed automatically in the database.

#### References

- *Link layer changes and expected behavior*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.network.Links()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from aequilibrae.utils.create_example import create_example
from shapely.ops import substring
import matplotlib.pyplot as plt
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
```

We will split link 37 right in the middle. Let's get the link and check its length.

```
links = project.network.links
all_nodes = project.network.nodes

link = links.get(37)
print(link.distance)
```

The idea is basically to copy a link and allocate the appropriate geometries to split the geometry we use Shapely's substring.

```
new_link = links.copy_link(37)

first_geometry = substring(link.geometry, 0, 0.5, normalized=True)
second_geometry = substring(link.geometry, 0.5, 1, normalized=True)

link.geometry = first_geometry
new_link.geometry = second_geometry
links.save()
```

The link objects in memory still don't have their ID fields updated, so we refresh them.

```
links.refresh()

link = links.get(37)
new_link = links.get(new_link.link_id)
print(link.distance, new_link.distance)
```

```
# We can plot the two links only
plt.clf()
plt.plot(*link.geometry.xy, color="blue")
plt.plot(*new_link.geometry.xy, color="blue")

for node in [link.a_node, link.b_node, new_link.b_node]:
    geo = all_nodes.get(node).geometry
    plt.plot(*geo.xy, "o", color="black")
plt.show()
```

```
# Or we plot the entire network
plt.clf()

link_ids = links.data["link_id"].values.tolist()
for lid in link_ids:
    geo = links.get(lid).geometry
    plt.plot(*geo.xy, color="blue")

node_ids = all_nodes.data["node_id"].values.tolist()
for nid in node_ids:
    geo = all_nodes.get(nid).geometry
    plt.plot(*geo.xy, "o", color="black")

plt.show()
```

```
project.close()
```

### Create centroid connectors

We use Coquimbo example to show how we can create centroids and connect them to the existing network efficiently.

We use Folium to visualize the resulting network.

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Zoning()`

```
# Imports
import folium
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

from aequibrae.utils.create_example import create_example
```

```
# Let's create an arbitrary project folder
fldr = join(gettempdir(), uuid4().hex)

# And create our Coquimbo project
project = create_example(fldr, "coquimbo")
```

As Coquimbo already has centroids and centroid connectors, we should remove them for the sake of this example.

```
with project.db_connection as conn:
    conn.execute("DELETE FROM links WHERE name LIKE 'centroid connector%'")
    conn.execute("DELETE FROM nodes WHERE is_centroid=1;")
    conn.commit()

    centroids = conn.execute("SELECT COUNT(node_id) FROM nodes WHERE is_centroid=1;").
    ↪fetchone()[0]
```

If you want to make sure your deletion process has worked, you can check the number of centroids!

```
print("Current number of centroids: ", centroids)
```

```
zoning = project.zoning
```

This centroid connector creation is effective because it uses the existing zone layer to create the centroids and connect them to the existing network.

First thing to do is add the centroids to all zones that doesn't have a centroid at the geographic centroid of the zone, using `add_centroids()`, which has a `robust` argument set to `True` as default. This means that it will automatically move the centroid location around to avoid conflicts with existing nodes.

```
zoning.add_centroids()
```

Let's connect the mode `c`, that stands for car.

```
mode = "c"
```

Then we connect the centroid to the network, by selecting the desired mode, the number of connectors, the allowed link types for connection, and if one wants to allow the connection to links in other zones. By setting `limit_to_zone=False`, we allow the centroid of one zone to be connected to a link outside the zone itself.

```
zoning.connect_mode(mode_id=mode, connectors=1, limit_to_zone=False)
```

It is possible to repeat the process above for a different mode, with different link type, number of connectors and connection allowance, as desired.

Finally, let's plot our data!

```
links = project.network.links.data
centroids = links[links["link_type"] == "centroid_connector"]
links = links[links["link_type"] != "centroid_connector"]

nodes = project.network.nodes.data
nodes = nodes[nodes["is_centroid"] == 1]
```

```

map = folium.Map(location=[-29.9568, -71.3456], zoom_start=14)
zoning.data.explore(m=map, color="blue", style_kwds={"fillOpacity": 0.05}, name="zones
↪")
centroids.explore(m=map, color="black", style_kwds={"weight": 2.5}, name="centroid_
↪connector")
links.explore(m=map, color="gray", style_kwds={"weight": 1}, name="links")
nodes.explore(m=map, color="red", style_kwds={"radius": 3, "fillOpacity": 1.0}, name=
↪"centroid")

folium.LayerControl().add_to(map)

map

```

```
project.close()
```

### Create project from GMNS

In this example, we import a simple network in GMNS format. The source files of this network are publicly available in the GMNS GitHub repository itself.

#### References

- *Importing from files in GMNS format*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Network.create_from_gmns()`

```

# Imports
from uuid import uuid4
from os.path import join
from tempfile import gettempdir

from aequilibrae import Project
from aequilibrae.parameters import Parameters
import folium

```

```

# We load the example file from the GMNS GitHub repository
link_file = "https://raw.githubusercontent.com/zephyr-data-specs/GMNS/main/examples/
↪Arlington_Signals/link.csv"
node_file = "https://raw.githubusercontent.com/zephyr-data-specs/GMNS/main/examples/
↪Arlington_Signals/node.csv"
use_group_file = "https://raw.githubusercontent.com/zephyr-data-specs/GMNS/main/
↪examples/Arlington_Signals/use_group.csv"

```

```

# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

```

(continues on next page)

(continued from previous page)

```
project = Project()
project.new(flldr)
```

In this cell, we modify the AequilibraE parameters.yml file so it contains additional fields to be read in the GMNS link and/or node tables. Remember to always keep the “required” key set to False, since we are adding a non-required field.

```
new_link_fields = {
  "bridge": {"description": "bridge flag", "type": "text", "required": False},
  "tunnel": {"description": "tunnel flag", "type": "text", "required": False},
}
new_node_fields = {
  "port": {"description": "port flag", "type": "text", "required": False},
  "hospital": {"description": "hospital flag", "type": "text", "required": False},
}

par = Parameters()
par.parameters["network"]["gmns"]["link"]["fields"].update(new_link_fields)
par.parameters["network"]["gmns"]["node"]["fields"].update(new_node_fields)
par.write_back()
```

As it is specified that the geometries are in the coordinate system EPSG:32619, which is different than the system supported by AequilibraE (EPSG:4326), we inform the srid in the method call:

```
project.network.create_from_gmns(
  link_file_path=link_file, node_file_path=node_file, use_group_path=use_group_file,
  ↪ srid=32619
)
```

Now, let’s plot a map. This map can be compared with the images of the README.md file located in this example repository on GitHub: [https://github.com/zephyr-data-specs/GMNS/blob/develop/examples/Arlington\\_Signals/README.md](https://github.com/zephyr-data-specs/GMNS/blob/develop/examples/Arlington_Signals/README.md)

```
links = project.network.links.data
nodes = project.network.nodes.data
```

```
map = links.explore(color="black", style_kwds={"weight": 2}, tool_tip="link_type", ↵
  ↪ name="links")
map = nodes.explore(m=map, color="red", style_kwds={"radius": 5, "fillOpacity": 1.0}, ↵
  ↪ name="nodes")

folium.LayerControl().add_to(map) # Add a layer control button to our map
map
```

```
project.close()
```

### Finding disconnected links

In this example, we show how to find disconnected links in an AequilibraE network.

We use the Nauru example to find disconnected links.

**See also**

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.PathResults()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from datetime import datetime
import pandas as pd
import numpy as np
from aequilibrae.utils.create_example import create_example
from aequilibrae.paths.results import PathResults
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

# Let's use the Nauru example project for display
project = create_example(fldr, "nauru")

# Let's analyze the mode car or 'c' in our model
mode = "c"
```

We need to create the graph, but before that, we need to have at least one centroid in our network.

```
# We get an arbitrary node to set as centroid and allow for the construction of graphs
nodes = project.network.nodes
centroid_count = nodes.data.query('is_centroid == 1').shape[0]

if centroid_count == 0:
    arbitrary_node = nodes.data["node_id"][0]
    nd = nodes.get(arbitrary_node)
    nd.is_centroid = 1
    nd.save()

network = project.network
network.build_graphs(modes=[mode])
graph = network.graphs[mode]
graph.set_blocked_centroid_flows(False)

if centroid_count == 0:
    # Let's revert to setting up that node as centroid in case we had to do it

    nd.is_centroid = 0
    nd.save()
```

We set the graph for computation

```
graph.set_graph("distance")
graph.set_skimming("distance")
```

## AequilibraE 1.4.1

---

Get the nodes that are part of the car network

```
missing_nodes = nodes.data.query("modes.str.contains(@mode)")[ "node_id" ].values
```

And prepare the path computation structure

```
res = PathResults()
res.prepare(graph)
```

Now we can compute all the path islands we have

```
islands = []
idx_islands = 0

while missing_nodes.shape[0] >= 2:
    print(datetime.now().strftime("%H:%M:%S"), f" - Computing island: {idx_islands}")
    res.reset()
    res.compute_path(missing_nodes[0], missing_nodes[1])
    res.predecessors[graph.nodes_to_indices[missing_nodes[0]]] = 0
    connected = graph.all_nodes[np.where(res.predecessors >= 0)]
    connected = np.intersect1d(missing_nodes, connected)
    missing_nodes = np.setdiff1d(missing_nodes, connected)
    print(f"    Nodes to find: {missing_nodes.shape[0]:,}")
    df = pd.DataFrame({"node_id": connected, "island": idx_islands})
    islands.append(df)
    idx_islands += 1

print(f"\nWe found {idx_islands} islands")
```

Let's consolidate everything into a single DataFrame

```
islands = pd.concat(islands)

# And save to disk alongside our model
islands.to_csv(join(fldr, "island_outputs_complete.csv"), index=False)
```

If you join the `node_id` field in the CSV file generated above with the `a_node` or `b_node` fields in the links table, you will have the corresponding links in each disjoint island found.

```
project.close()
```

### Create project from a link layer

In this example, we show how to create an empty project and populate it with a network coming from a link layer we load from a text file. It can easily be replaced with a different form of loading the data (GeoPandas, for example).

We use Folium to visualize the resulting network.

#### References

- *Project Data Components*

**See also**

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.network.Links()`
- `aequilibrae.project.network.Nodes()`
- `aequilibrae.project.network.Modes()`
- `aequilibrae.project.network.LinkTypes()`

```
# Imports
from uuid import uuid4
import urllib.request
from string import ascii_lowercase
from tempfile import gettempdir
from os.path import join
from shapely.wkt import loads as load_wkt
import pandas as pd

from aequibrae import Project
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

project = Project()
project.new(fldr)
```

Now we obtain the link data for our example (in this case from a link layer we will download from the AequibraE website). With data, we load it on Pandas

```
dest_path = join(fldr, "queluz.csv")
urllib.request.urlretrieve("https://aequilibrae.com/data/queluz.csv", dest_path)

df = pd.read_csv(dest_path)
```

Let's see if we have to add new link\_types to the model before we add links The links we have in the data are:

```
link_types = df.link_type.unique()
```

And the existing link types are

```
lt = project.network.link_types
lt_dict = lt.all_types()
existing_types = [ltype.link_type for ltype in lt_dict.values()]
```

We could also get it directly from the project database

**with project.db\_connection as conn:**

```
existing_types = [x[0] for x in conn.execute('Select link_type from link_types')]
```

We add the link types that do not exist yet. The trickier part is to choose a unique link type ID for each link type. You might want to tailor the link type for your use, but here we get letters in alphabetical order.

```
types_to_add = [ltype for ltype in link_types if ltype not in existing_types]
for i, ltype in enumerate(types_to_add):
    new_type = lt.new(ascii_lowercase[i])
    new_type.link_type = ltype
    # new_type.description = 'Your custom description here if you have one'
    new_type.save()
```

We need to use a similar process for modes

```
md = project.network.modes
md_dict = md.all_modes()
existing_modes = {k: v.mode_name for k, v in md_dict.items() }
```

Now let's see the modes we have in the network that we DON'T have already in the model.

We get all the unique mode combinations and merge them into a single string

```
all_variations_string = "".join(df.modes.unique())

# We then get all the unique modes in that string above
all_modes = set(all_variations_string)

# This would all fit nicely in a single line of code, btw. Try it!
```

Now let's add any new mode to the project

```
modes_to_add = [mode for mode in all_modes if mode not in existing_modes]
for i, mode_id in enumerate(modes_to_add):
    new_mode = md.new(mode_id)
    # You would need to figure out the right name for each one, but this will do
    new_mode.mode_name = f"Mode_from_original_data_{mode_id}"
    # new_type.description = 'Your custom description here if you have one'

    # It is a little different because you need to add it to the project
    project.network.modes.add(new_mode)
    new_mode.save()
```

We cannot use the existing link\_id, so we create a new field to not loose this information

```
links = project.network.links
link_data = links.fields

# Create the field and add a good description for it
link_data.add("source_id", "link_id from the data source")

# We need to refresh the fields so the adding method can see it
links.refresh_fields()
```

We can now add all links to the project!

```
for idx, record in df.iterrows():
    new_link = links.new()

    # Now let's add all the fields we had
```

(continues on next page)

(continued from previous page)

```

new_link.source_id = record.link_id
new_link.direction = record.direction
new_link.modes = record.modes
new_link.link_type = record.link_type
new_link.name = record.name
new_link.geometry = load_wkt(record.WKT)
new_link.save()

```

We grab all the links data as a geopandas GeoDataFrame so we can process it easier

```
links = project.network.links.data
```

Let's plot our network!

```
links.explore(color="blue", style_kwds={"weight": 2}, tooltip="link_type")
```

```
project.close()
```

## Network simplifier

In this example we use Nauru network to show how one can simplify the network, merging short links into longer ones or turning links into nodes, and saving these changes into the project.

We use Folium to visualize the resulting network.

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.tools.network_simplifier.NetworkSimplifier()`

```

# Imports
import branca
import folium
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

from aequilibrae.utils.create_example import create_example
from aequilibrae.project.tools.network_simplifier import NetworkSimplifier

```

Let's use the Nauru example project for display

```

fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "nauru")

```

To simplify the network, we need to create a graph. As Nauru doesn't have any centroid in its network we have to create a centroid from an arbitrary node, otherwise we cannot create a graph.

```

nodes = project.network.nodes
centroid_count = nodes.data.query("is_centroid == 1").shape[0]

```

(continues on next page)

(continued from previous page)

```

if centroid_count == 0:
    arbitrary_node = nodes.data["node_id"][0]
    nd = nodes.get(arbitrary_node)
    nd.is_centroid = 1
    nd.save()

```

```

# Let's analyze the mode car or 'c' in our model
mode = "c"

```

```

# Let's set the graph for computation
network = project.network
network.build_graphs(modes=[mode])
graph = network.graphs[mode]
graph.set_graph("distance")
graph.set_skimming("distance")
graph.set_blocked_centroid_flows(False)

```

```

# Let's revert to setting up that node as centroid in case we had to do it
if centroid_count == 0:
    nd.is_centroid = 0
    nd.save()

```

We check the number of links and nodes our project has initially.

```

links_before = project.network.links.data
nodes_before = project.network.nodes.data

print("This project initially has {} links and {} nodes".format(links_before.shape[0],
↪ nodes_before.shape[0]))

```

Let's call the `NetworkSimplifier` class. Any changes made to the database using this class are permanent. Make sure you have a backup if necessary.

```

net = NetworkSimplifier()

```

When we choose to simplify the network, we pass a graph object to the function, and the output of this operation is

```

net.simplify(graph)
net.rebuild_network()

```

Let's plot the previous and actual networks!

```

links_after = net.network.links.data
nodes_after = net.network.nodes.data

```

```

fig = branca.element.Figure()

subplot1 = fig.add_subplot(1, 2, 1)
subplot2 = fig.add_subplot(1, 2, 2)

map1 = folium.Map(location=[-0.508371, 166.931142], zoom_start=17)

```

(continues on next page)

(continued from previous page)

```

map1 = links_before.explore(m=map1, color="black", style_kwds={"weight": 2}, name=
↳"links_before")
map1 = nodes_before.explore(m=map1, color="red", style_kwds={"radius": 3, "fillOpacity
↳": 1.0}, name="nodes_before")
folium.LayerControl().add_to(map1)

map2 = folium.Map(location=[-0.508371, 166.931142], zoom_start=17)
map2 = links_after.explore(m=map2, color="black", style_kwds={"weight": 2}, name=
↳"links_after")
map2 = nodes_after.explore(m=map2, color="blue", style_kwds={"radius": 3, "fillOpacity
↳": 1.0}, name="nodes_after")
folium.LayerControl().add_to(map2)

subplot1.add_child(map1)
subplot2.add_child(map2)

fig

```

Differently we can simplify the network by collapsing links into nodes. Notice that this operation modifies the network in the neighborhood.

```

net.collapse_links_into_nodes([903])
net.rebuild_network()

```

Let's plot the network once again and check the modifications!

```

links_after = net.network.links.data
nodes_after = net.network.nodes.data

```

```

fig = branca.element.Figure()

subplot1 = fig.add_subplot(1, 2, 1)
subplot2 = fig.add_subplot(1, 2, 2)

map1 = folium.Map(location=[-0.509363, 166.928563], zoom_start=18)
map1 = links_before.explore(m=map1, color="black", style_kwds={"weight": 2}, name=
↳"links_before")
map1 = nodes_before.explore(m=map1, color="red", style_kwds={"radius": 3, "fillOpacity
↳": 1.0}, name="nodes_before")
folium.LayerControl().add_to(map1)

map2 = folium.Map(location=[-0.509363, 166.928563], zoom_start=18)
map2 = links_after.explore(m=map2, color="black", style_kwds={"weight": 2}, name=
↳"links_after")
map2 = nodes_after.explore(m=map2, color="blue", style_kwds={"radius": 3, "fillOpacity
↳": 1.0}, name="nodes_after")
folium.LayerControl().add_to(map2)

subplot1.add_child(map1)
subplot2.add_child(map2)

fig

```

```
project.close()
```

## DISTRIBUTION PROCEDURES

In the context of transportation modeling, a distribution model tries to estimate the number of trips in each of the matrix cells on the basis of any information available<sup>1</sup>.

In the following sections, we present the classes that comprise AequilibraE's distribution module, as well as present a benchmark validation for the IPF procedure and some usage examples.

### 5.1 Distribution procedure classes

AequilibraE's distribution module comprises three different classes: `GravityApplication`, `GravityCalibration`, and `IpF`.

#### 5.1.1 GravityApplication

This class, as its own name explains, applies a synthetic gravity model, using one of the available deterrence functions: EXPO, POWER, or GAMMA. It requires some parameters, such as:

- Synthetic gravity model (which is an instance of `SyntheticGravityModel`)
- Impedance matrix (`AequilibraeMatrix`);
- Vector (`Pandas.DataFrame`) with data for row and column totals;
- Row and column fields, which are the names of the fields that contain the data for row and column totals.

The synthetic gravity model instance can be either created or loaded, if you have already calibrated a model.

Please check other arguments and parameters that are passed to `GravityApplication` in its documentation.

#### See also

- `aequilibrae.distribution.SyntheticGravityModel()`  
Function documentation
- `aequilibrae.distribution.GravityApplication()`  
Function documentation

#### 5.1.2 GravityCalibration

Calibrate the model consists in checking if all the parameters set are appropriate. This class, as its own name explains, calibrates a traditional gravity model, using one of the available deterrence functions: EXPO, POWER, or GAMMA. It requires some arguments such as:

---

<sup>1</sup> Ortúzar, J. de D. and Willumsen, L.G. (2011) Modelling transport. 4th edition. Chichester: Wiley.

- Matrix containing the base trips (`AequilibraeMatrix`);
- Impedance matrix (`AequilibraeMatrix`);
- Deterrence function name.

Please check other arguments and parameters that are passed to `GravityCalibration` in its documentation.

### See also

- [`aequilibrae.distribution.GravityCalibration\(\)`](#)  
Function documentation

### 5.1.3 IpF

IPF is an acronym for Iterative Proportional Fitting, also known as Fratar or Furness. The IPF procedure is used to “distribute” future trips based on a growth factor. The procedure can be run with or without an AequilibraE model, with the latter using one of AequilibraE matrices or NumPy arrays as data input.

In the following section, we present the validation of the results produced with AequilibraE’s IPF.

### See also

- [`aequilibrae.distribution.IpF\(\)`](#)  
Function documentation
- [Running IPF without an AequilibraE model](#)  
Usage example
- [Running IPF with NumPy array](#)  
Usage example

## 5.2 IPF Performance

The use of iterative proportional fitting (IPF) is quite common on processes involving doubly-constraining matrices, such as synthetic gravity models and fractional split models (aggregate destination-choice models).

As this is a commonly used algorithm, we have implemented it in Cython, where we can take full advantage of multi-core CPUs. We have also implemented the ability of using both 32-bit and 64-bit floating-point seed matrices, which has direct impact on cache use and consequently computational performance.

In this section, we compare the runtime of AequilibraE’s current implementation of IPF, with a general IPF algorithm written in pure Python, available [here](#).

The figure below compares AequilibraE’s IPF runtime with one core with the benchmark Python code. From the figure below, we can notice that the runtimes were practically the same for the instances with 1,000 zones or less. As the number of zones increases, AequilibraE demonstrated to be slightly faster than the benchmark python code, while applying IPF to a 32-bit NumPy array (`np.float32`) was significantly faster.

It’s worth mentioning that the user can set up a threshold for AequilibraE’s IPF function, as well as use more than one core to speed up the fitting process.

As IPF is an embarrassingly-parallel workload, it is more relevant to look at the performance of the AequilibraE implementations, starting by comparing the implementation performance for inputs in 32 vs 64 bits using 32 threads.

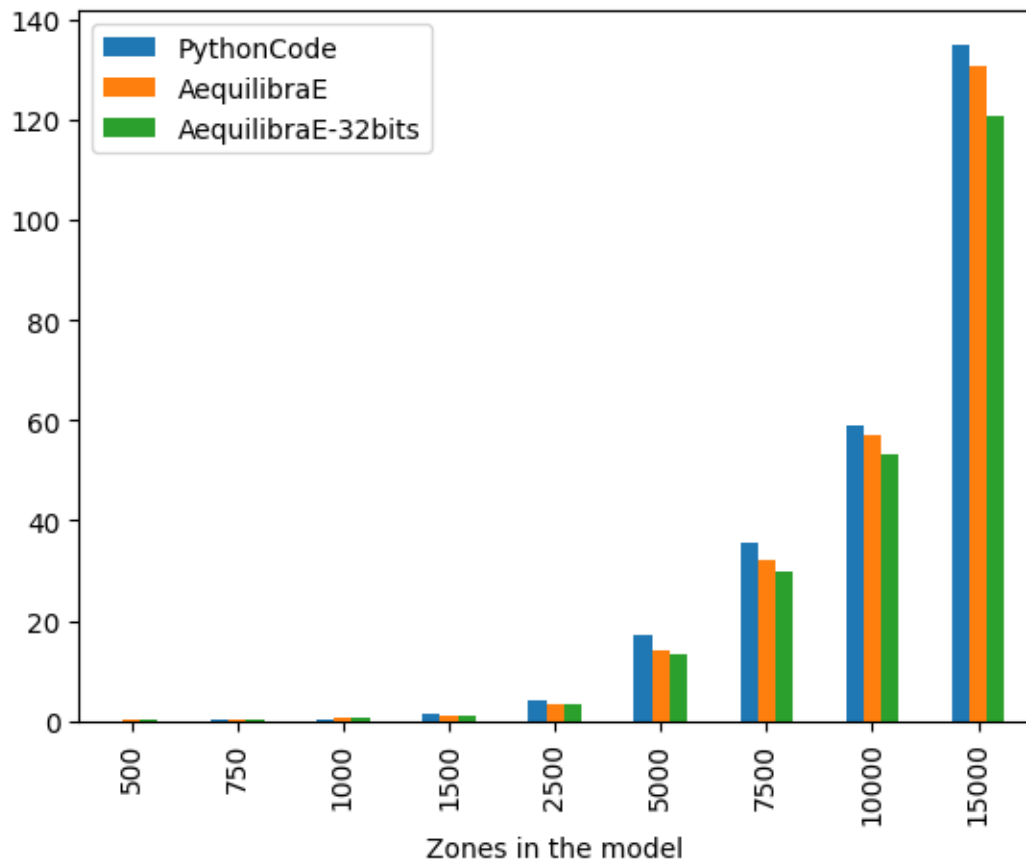


Fig. 1: AequilibraE's IPF runtime

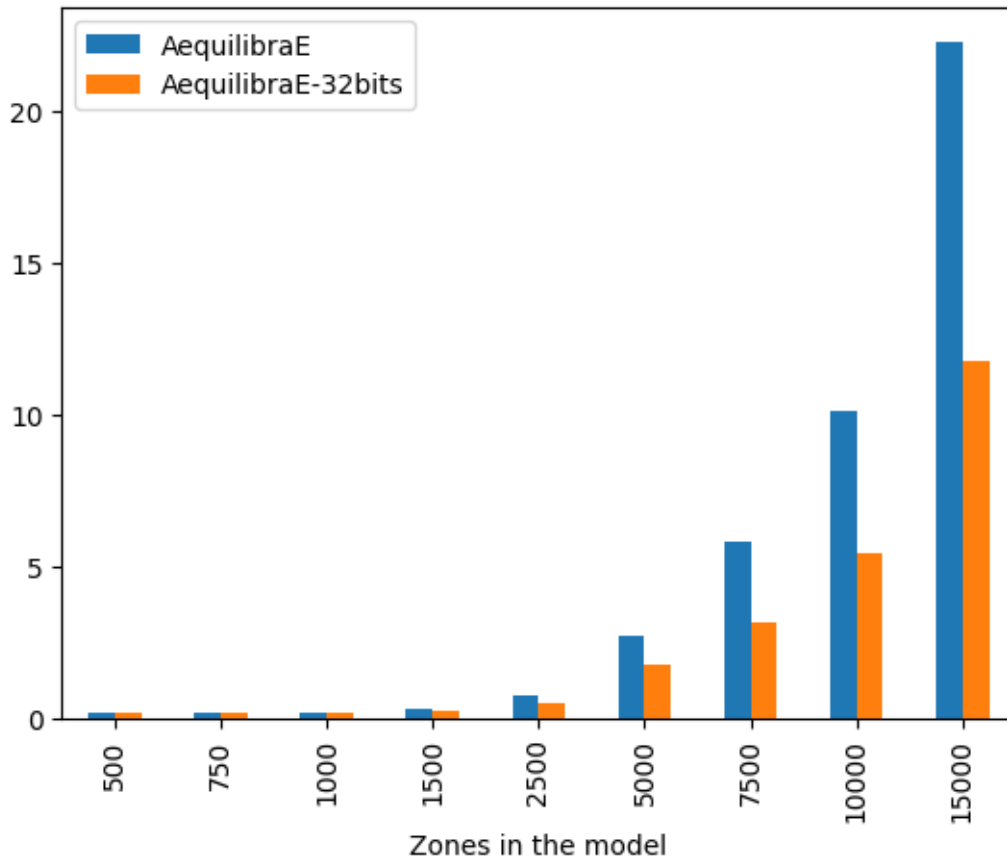


Fig. 2: AequilibraE's IPF runtime 32 vs 64 bits

The difference is staggering, with the 32-bit implementation being twice as fast as the 64-bit one for large matrices. It is also worth noting that differences in results between the outputs between these two versions are incredibly small ( $RMSE < 1.1e-10$ ), and therefore unlikely to be relevant in most applications.

We can also look at performance gain across matrix sizes and number of cores, and it becomes clear that the 32-bit version scales significantly better than its 64-bit counterpart, showing significant performance gains up to 16 threads, while the latter stops showing much improvement beyond 8 threads, likely due to limitations on cache size.

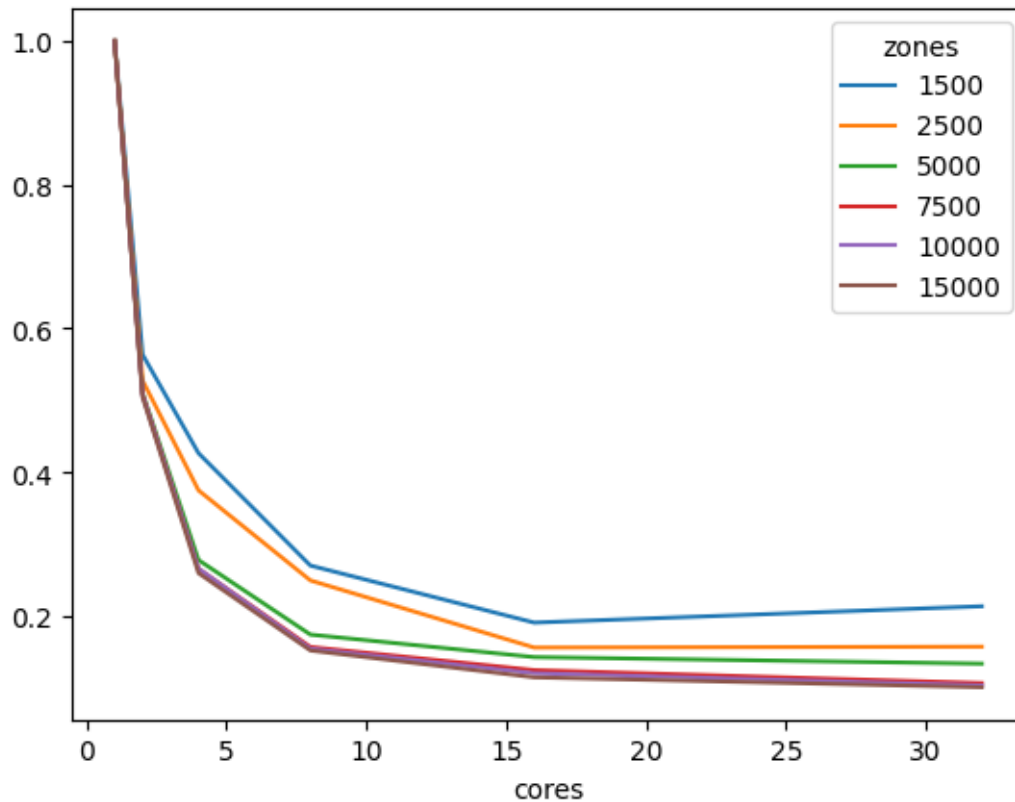


Fig. 3: number of cores used in IPF for 64 bit matrices

In conclusion, AequilibraE's IPF implementation is over 11 times faster than its pure Python counterpart for large matrices on a workstation, largely due to the use of Cython and multi-threading, but also due to the use of a 32-bit version of the algorithm.

These tests were run on a Threadripper 3970x (released in 2019) workstation with 32 cores (64 threads) @ 3.7 GHz and 256 Gb of RAM. The code is provided below for reference.

### 5.2.1 Reference code

```
from copy import deepcopy
from time import perf_counter
import numpy as np
import pandas as pd
from aequilibrae.distribution.ipf_core import ipf_core
from tqdm import tqdm
```

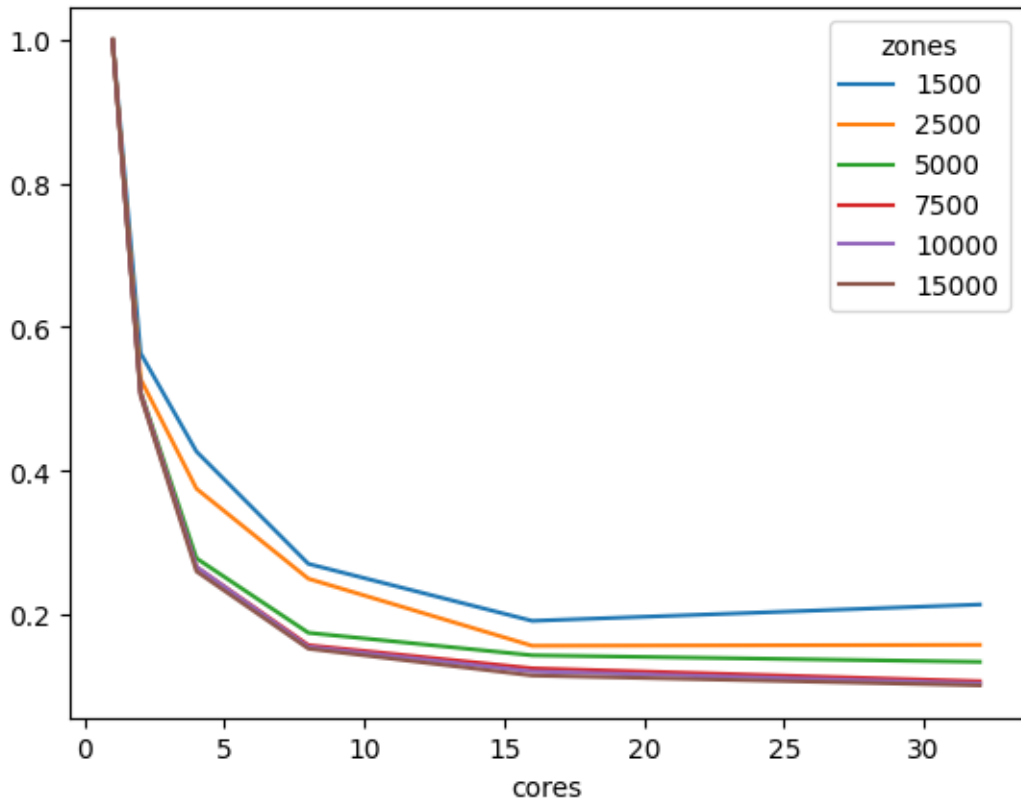


Fig. 4: number of cores used in IPF for 32 bit matrices

```

# From:
# https://github.com/joshchea/python-tdm/blob/master/scripts/CalcDistribution.py

def CalcFratar(ProdA, AttrA, Trips1, maxIter=10):
    '''Calculates fratar trip distribution
    Proda = Production target as array
    AttrA = Attraction target as array
    Trips1 = Seed trip table for fratar
    maxIter (optional) = maximum iterations, default is 10
    Returns frateded trip table
    '''
    # print('Checking production, attraction balancing:')
    sumP = Proda.sum()
    sumA = AttrA.sum()
    # print('Production: ', sumP)
    # print('Attraction: ', sumA)
    if sumP != sumA:
        # print('Productions and attractions do not balance, attractions will be_
→scaled to productions!')
        AttrA = AttrA*(sumP/sumA)
    else:
        pass
        # print('Production, attraction balancing OK.')
    # Run 2D balancing --->
    for balIter in range(0, maxIter):
        ComputedProductions = Trips1.sum(1)
        ComputedProductions[ComputedProductions == 0] = 1
        OrigFac = (Proda/ComputedProductions)
        Trips1 = Trips1*OrigFac[:, np.newaxis]

        ComputedAttractions = Trips1.sum(0)
        ComputedAttractions[ComputedAttractions == 0] = 1
        DestFac = (AttrA/ComputedAttractions)
        Trips1 = Trips1*DestFac
    return Trips1

```

```
mat_sizes = [500, 750, 1000, 1500, 2500, 5000, 7500, 10000, 15000]
```

```

#Benchmarking
bench_data = []
cores = 1
repetitions = 5
iterations = 100
for zones in mat_sizes:
    for repeat in tqdm(range(repetitions), f"Repetitions for zone size {zones}"):
        mat1 = np.random.rand(zones, zones)
        target_prod = np.random.rand(zones)
        target_atra = np.random.rand(zones)
        target_atra *= target_prod.sum()/target_atra.sum()

        aeq_mat = deepcopy(mat1)
        # We use a nonsensical negative tolerance to force it to run all iterations

```

(continues on next page)

(continued from previous page)

```

# and set warning for non-convergence to false, as we know it won't converge
t = perf_counter()
ipf_core(aeq_mat, target_prod, target_atra, max_iterations=iterations,
↳tolerance=-5, cores=cores, warn=False)
aeqt = perf_counter() - t

aeq_mat32 = np.array(mat1, np.float32)
# We now run the same thing with a seed matrix in single-precision (float 32
↳bits) instead of double as above (64 bits)
t = perf_counter()
ipf_core(aeq_mat32, target_prod, target_atra, max_iterations=iterations,
↳tolerance=-5, cores=cores, warn=False)
aeqt2 = perf_counter() - t

bc_mat = deepcopy(mat1)
t = perf_counter()
x = CalcFratar(target_prod, target_atra, bc_mat, maxIter=iterations)

bench_data.append([zones, perf_counter() - t, aeqt, aeqt2])

```

```

Repetitions for zone size 500: 100%|██████████| 5/5 [00:01<00:00, 2.60it/s]
Repetitions for zone size 750: 100%|██████████| 5/5 [00:04<00:00, 1.18it/s]
Repetitions for zone size 1000: 100%|██████████| 5/5 [00:07<00:00, 1.57s/it]
Repetitions for zone size 1500: 100%|██████████| 5/5 [00:19<00:00, 3.88s/it]
Repetitions for zone size 2500: 100%|██████████| 5/5 [00:56<00:00, 11.24s/it]
Repetitions for zone size 5000: 100%|██████████| 5/5 [03:44<00:00, 44.89s/it]
Repetitions for zone size 7500: 100%|██████████| 5/5 [08:09<00:00, 97.89s/it]
Repetitions for zone size 10000: 100%|██████████| 5/5 [14:11<00:00, 170.34s/it]
Repetitions for zone size 15000: 100%|██████████| 5/5 [32:23<00:00, 388.70s/it]


```

```

bench_df = pd.DataFrame(bench_data, columns=["Zones in the model", "PythonCode",
↳"AequilibraE", "AequilibraE-32bits"])
bench_df.groupby(["Zones in the model"]).mean().plot.bar()

```

```
<Axes: xlabel='Zones in the model'>
```

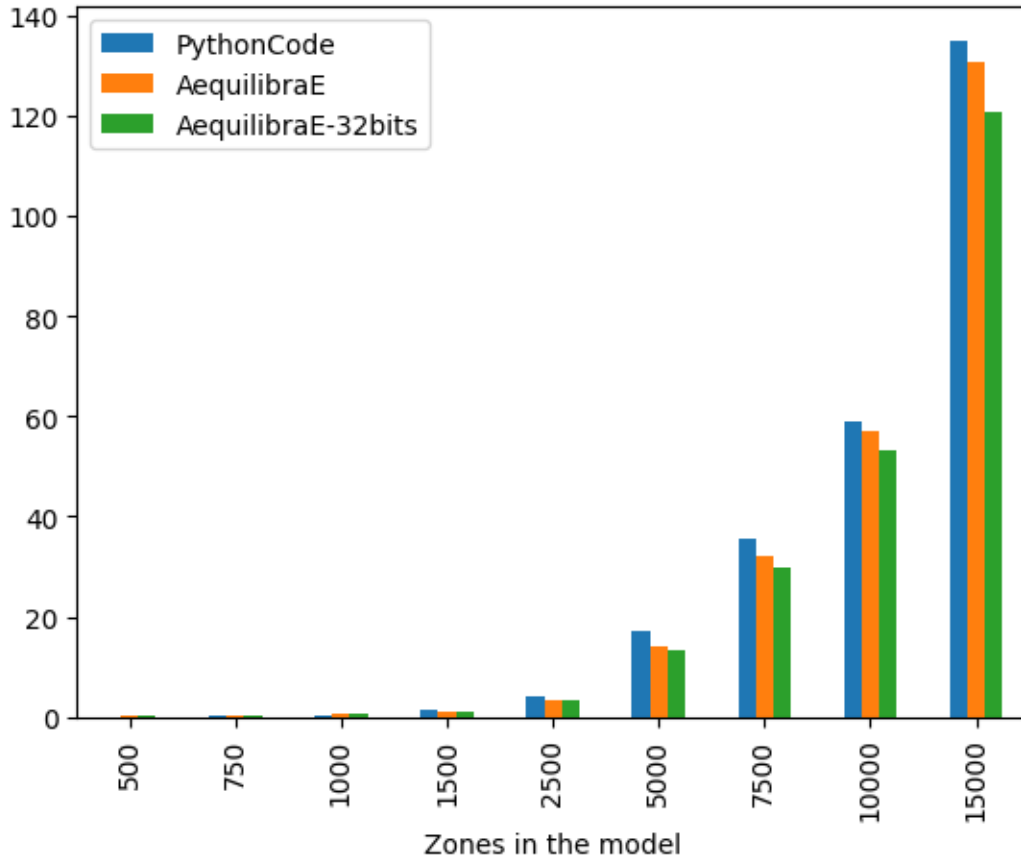

```
bench_df.groupby(["Zones in the model"]).mean()
```

```
#Benchmarking 32 threads
bench_data_parallel = []
cores = 32
repetitions = 5
iterations = 100
for zones in mat_sizes:
    for repeat in tqdm(range(repetitions), f"Repetitions for zone size {zones}"):
        mat1 = np.random.rand(zones, zones)
        target_prod = np.random.rand(zones)
        target_atra = np.random.rand(zones)
        target_atra *= target_prod.sum()/target_atra.sum()

        aeq_mat = deepcopy(mat1)
        # We use a nonsensical negative tolerance to force it to run all iterations
        # and set warning for non-convergence to false, as we know it won't converge
        t = perf_counter()
        ipf_core(aeq_mat, target_prod, target_atra, max_iterations=iterations,
↳tolerance=-5, cores=cores, warn=False)
        aeq_t = perf_counter() - t

        aeq_mat32 = np.array(mat1, np.float32)
        # We now run the same thing with a seed matrix in single-precision (float 32
```

(continues on next page)

(continued from previous page)

```

↪bits) instead of double as above (64 bits)
    t = perf_counter()
    ipf_core(aeq_mat32, target_prod, target_atra, max_iterations=iterations,
↪tolerance=-5, cores=cores, warn=False)
    aeqt2 = perf_counter() - t

    rmse = np.sqrt(np.mean((aeq_mat-aeq_mat32)**2))

    bench_data_parallel.append([zones, aeqt, aeqt2, rmse])

```

```

Repetitions for zone size 500: 100%|██████████| 5/5 [00:01<00:00, 2.70it/s]
Repetitions for zone size 750: 100%|██████████| 5/5 [00:01<00:00, 2.64it/s]
Repetitions for zone size 1000: 100%|██████████| 5/5 [00:02<00:00, 2.37it/s]
Repetitions for zone size 1500: 100%|██████████| 5/5 [00:03<00:00, 1.61it/s]
Repetitions for zone size 2500: 100%|██████████| 5/5 [00:07<00:00, 1.41s/it]
Repetitions for zone size 5000: 100%|██████████| 5/5 [00:24<00:00, 4.91s/it]
Repetitions for zone size 7500: 100%|██████████| 5/5 [00:49<00:00, 9.96s/it]
Repetitions for zone size 10000: 100%|██████████| 5/5 [01:26<00:00, 17.29s/it]
Repetitions for zone size 15000: 100%|██████████| 5/5 [03:10<00:00, 38.02s/it]


```

```

bench_df_parallel = pd.DataFrame(bench_data_parallel, columns=["Zones in the model",
↪"AequilibraE", "AequilibraE-32bits", "rmse"])
bench_df_parallel.groupby(["Zones in the model"]).mean()[["AequilibraE",
↪"AequilibraE-32bits"]].plot.bar()

```

```
<Axes: xlabel='Zones in the model'>
```

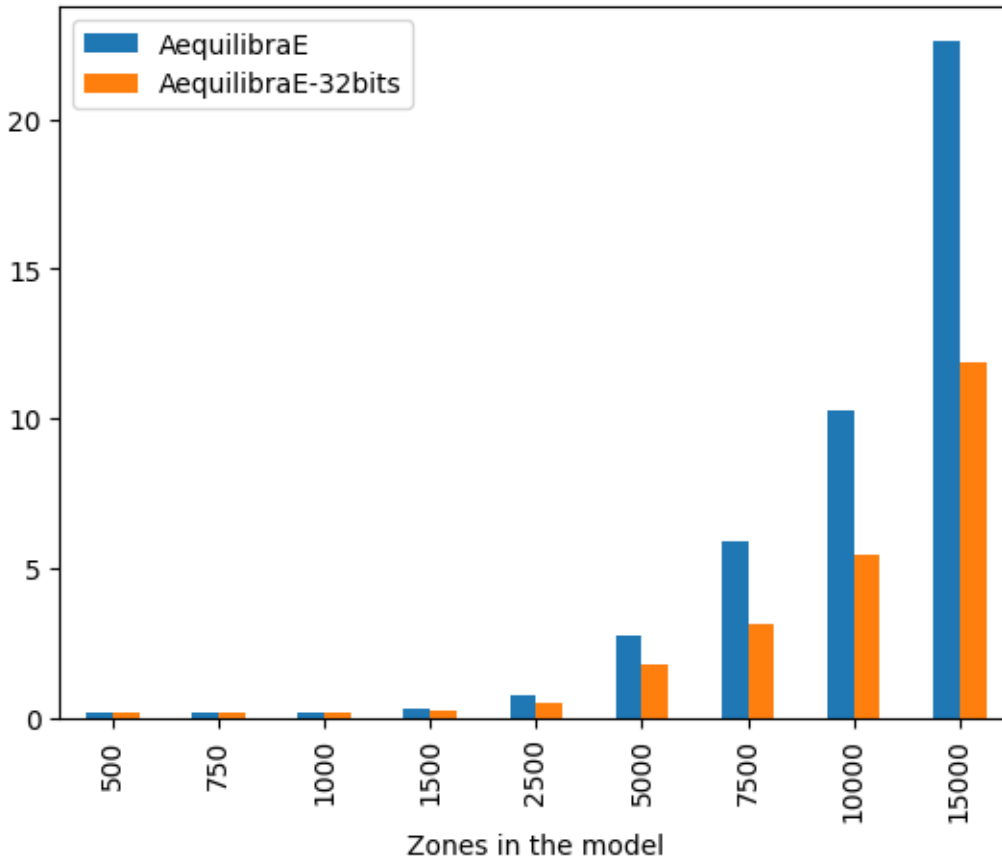

```
bench_df_parallel.groupby(["Zones in the model"]).mean()
```

```
cores_to_use = [1, 2, 4, 8, 16, 32]
```

```
aeq_data = []
repetitions = 1
iterations = 50
for zones in mat_sizes:
    for cores in tqdm(cores_to_use, f"Zone size: {zones}"):
        for repeat in range(repetitions):
            mat1 = np.random.rand(zones, zones)
            target_prod = np.random.rand(zones)
            target_atra = np.random.rand(zones)
            target_atra *= target_prod.sum()/target_atra.sum()

            aeq_mat = np.array(deepcopy(mat1), np.float32)
            t = perf_counter()
            ipf_core(aeq_mat, target_prod, target_atra, max_iterations=iterations,
                    tolerance=-5, cores=cores, warn=False)
            aeqt = perf_counter() - t


            aeq_data.append([zones, cores, aeqt])
```

```

Zone size: 500: 100% ██████████ | 6/6 [00:00<00:00, 12.14it/s]
Zone size: 750: 100% ██████████ | 6/6 [00:00<00:00, 10.20it/s]
Zone size: 1000: 100% ██████████ | 6/6 [00:00<00:00, 6.87it/s]
Zone size: 1500: 100% ██████████ | 6/6 [00:01<00:00, 3.42it/s]
Zone size: 2500: 100% ██████████ | 6/6 [00:04<00:00, 1.32it/s]
Zone size: 5000: 100% ██████████ | 6/6 [00:16<00:00, 2.73s/it]
Zone size: 7500: 100% ██████████ | 6/6 [00:35<00:00, 5.93s/it]
Zone size: 10000: 100% ██████████ | 6/6 [01:02<00:00, 10.46s/it]
Zone size: 15000: 100% ██████████ | 6/6 [02:21<00:00, 23.62s/it]
    
```

```

aeq_df = pd.DataFrame(aeq_data, columns=["zones", "cores", "time"])
aeq_df = aeq_df[aeq_df.zones>1000]
aeq_df = aeq_df.groupby(["zones", "cores"]).mean().reset_index()
aeq_df = aeq_df.pivot_table(index="zones", columns="cores", values="time")
for cores in cores_to_use[:-1]:
    aeq_df.loc[:, cores] /= aeq_df[1]
aeq_df.transpose().plot()
aeq_df
    
```

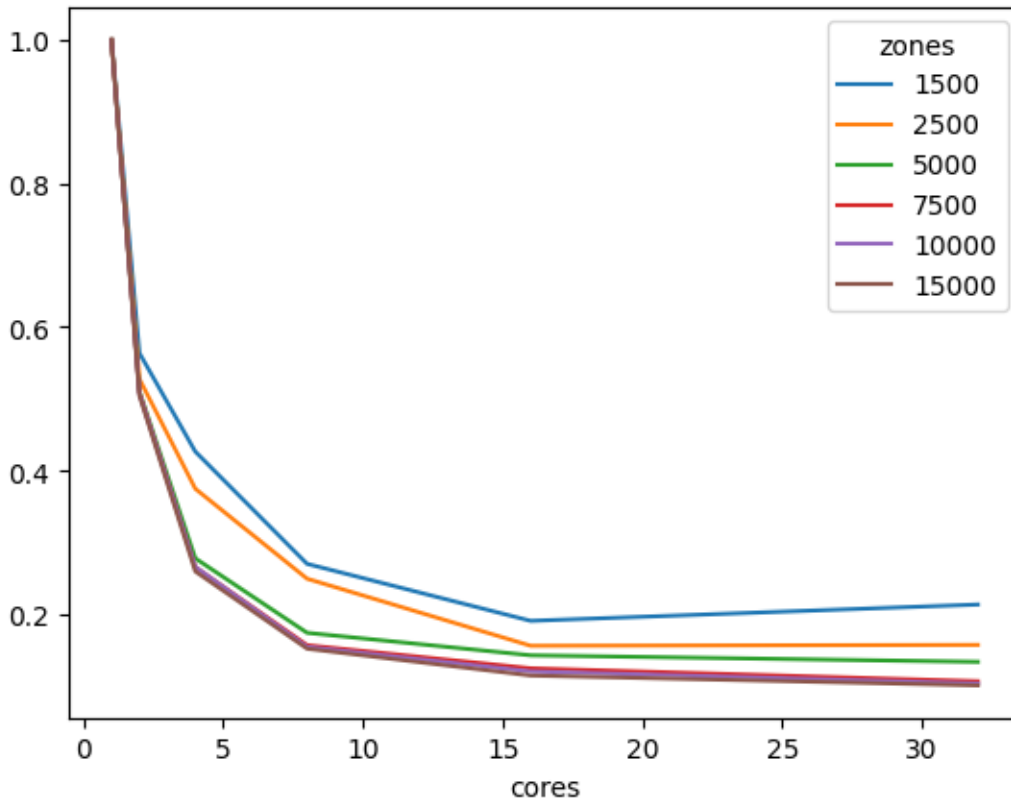

```

aeq_data = []
repetitions = 1
iterations = 50
for zones in mat_sizes:
    for cores in tqdm(cores_to_use, f"Zone size: {zones}"):
        for repeat in range(repetitions):
    
```

(continues on next page)

(continued from previous page)

```

mat1 = np.random.rand(zones, zones)
target_prod = np.random.rand(zones)
target_atra = np.random.rand(zones)
target_atra *= target_prod.sum()/target_atra.sum()

aeq_mat = np.array(deepcopy(mat1), np.float64)
t = perf_counter()
ipf_core(aeq_mat, target_prod, target_atra, max_iterations=iterations,
↳tolerance=-5, cores=cores, warn=False)
aeqt = perf_counter() - t

aeq_data.append([zones, cores, aeqt])

```

```


Zone size: 500: 100% ██████████ | 6/6 [00:00<00:00, 12.51it/s]
Zone size: 750: 100% ██████████ | 6/6 [00:00<00:00, 9.19it/s]
Zone size: 1000: 100% ██████████ | 6/6 [00:00<00:00, 6.50it/s]
Zone size: 1500: 100% ██████████ | 6/6 [00:01<00:00, 3.07it/s]
Zone size: 2500: 100% ██████████ | 6/6 [00:05<00:00, 1.17it/s]
Zone size: 5000: 100% ██████████ | 6/6 [00:18<00:00, 3.14s/it]
Zone size: 7500: 100% ██████████ | 6/6 [00:42<00:00, 7.10s/it]
Zone size: 10000: 100% ██████████ | 6/6 [01:15<00:00, 12.51s/it]
Zone size: 15000: 100% ██████████ | 6/6 [02:47<00:00, 27.93s/it]

```

```

aeq_df = pd.DataFrame(aeq_data, columns=["zones", "cores", "time"])
aeq_df = aeq_df[aeq_df.zones>1000]
aeq_df = aeq_df.groupby(["zones", "cores"]).mean().reset_index()
aeq_df = aeq_df.pivot_table(index="zones", columns="cores", values="time")
for cores in cores_to_use[::-1]:
    aeq_df.loc[:, cores] /= aeq_df[1]
aeq_df.transpose().plot()
aeq_df

```

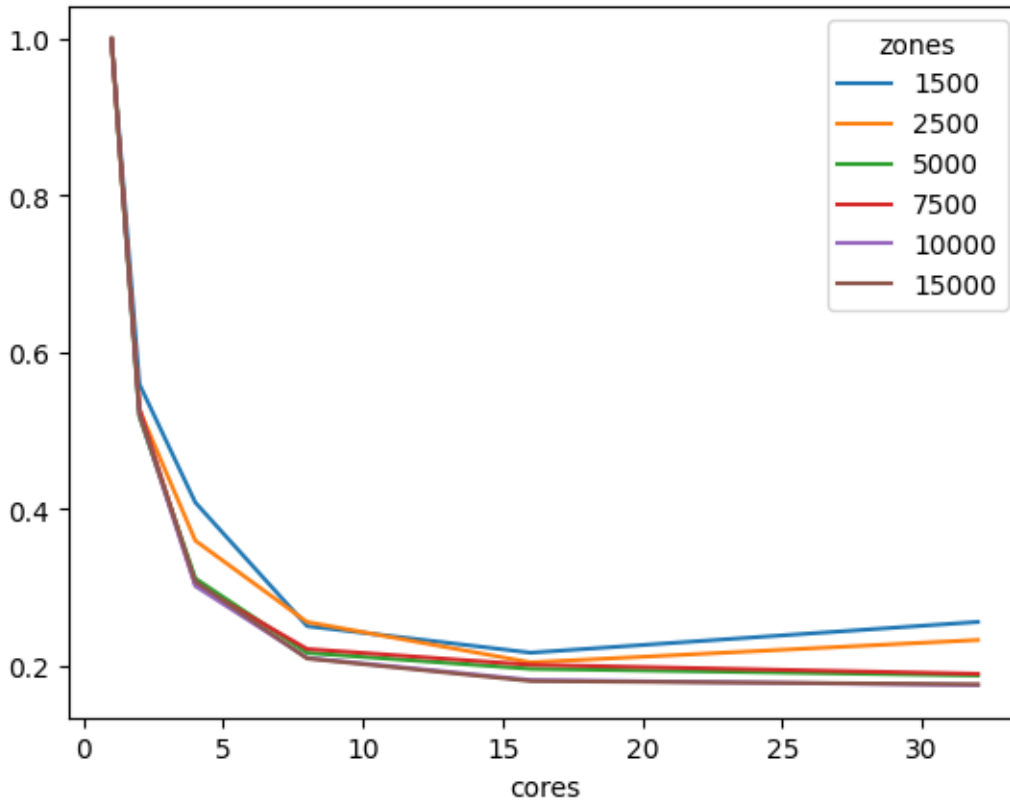

## 5.3 Examples

### 5.3.1 Distribution Procedures

#### Running IPF with NumPy array

In this example, we show how to use `aequilibrae.distribution.ipf_core`, a high-performance alternative for all those who want to (re)balance values within a matrix making direct use of growth factors. `ipf_core` was built to suit countless applications rather than being limited to trip distribution.

We demonstrate the usage of `ipf_core` with a 4x4 matrix with 64-bit data, which is indeed very small. Additionally, a more comprehensive discussion of the algorithm's performance with a 32-bit or 64-bit seed matrices is provided in `../IPF_benchmark`.

The data used in this example comes from Table 5.6 in [Ortúzar & Willumsen \(2011\)](#).

#### References

- *IPF Performance*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.distribution.ipf_core()`

```
# Imports
import numpy as np

from aequilibrae.distribution.ipf_core import ipf_core
```

```
matrix = np.array([[5, 50, 100, 200], [50, 5, 100, 300], [50, 100, 5, 100], [100, 200,
↪ 250, 20]], dtype="float64")
future_prod = np.array([400, 460, 400, 702], dtype="float64")
future_attr = np.array([260, 400, 500, 802], dtype="float64")
```

Given our use of default parameter values in the other application of IPF, we should set *tolerance* value to obtain the same result.

```
num_iter, gap = ipf_core(matrix, future_prod, future_attr, tolerance=0.0001)
```

Let's print our updated matrix

```
matrix
```

Notice that the matrix value was updated, and results are the same as in *Running IPF without an AequilibraE model* - and this is no coincidence. Under the hood, when we call `aequilibrae.distribution.Ipf`, we are actually calling the `ipf_core` method.

### Running IPF without an AequilibraE model

In this example, we show you how to use AequilibraE's IPF function without a model. This is a complement to the application in *Forecasting*.

Let's consider that you have an OD-matrix, the future production and future attraction values.

*How would your trip distribution matrix using IPF look like?*

The data used in this example comes from Table 5.6 in Ortúzar & Willumsen (2011).

#### References

- *AequilibraE Matrix*
- *IPF Performance*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.matrix.AequilibraeMatrix()`
- `aequilibrae.distribution.Ipf()`

```
# Imports
from os.path import join
from tempfile import gettempdir

import numpy as np
```

(continues on next page)

(continued from previous page)

```
import pandas as pd
```

```
from aequilibrae.distribution import Ipf
from aequilibrae.matrix import AequilibraeMatrix
```

```
folder = gettempdir()
```

```
matrix = np.array([[5, 50, 100, 200], [50, 5, 100, 300], [50, 100, 5, 100], [100, 200,
↪ 250, 20]], dtype="float64")
future_prod = np.array([400, 460, 400, 702], dtype="float64")
future_attr = np.array([260, 400, 500, 802], dtype="float64")

num_zones = matrix.shape[0]
```

```
mtx = AequilibraeMatrix()
mtx.create_empty(file_name=join(folder, "matrix.aem"), zones=num_zones)
mtx.index[:] = np.arange(1, num_zones + 1)[:]
mtx.matrices[:, :, 0] = matrix[:]
mtx.computational_view()
```

```
args = {
    "entries": mtx.index.shape[0],
    "field_names": ["productions", "attractions"],
    "data_types": [np.float64, np.float64],
    "file_path": join(folder, "vectors.aem"),
}

vectors = pd.DataFrame({"productions": future_prod, "attractions": future_attr},
↪ index=mtx.index)
```

```
args = {
    "matrix": mtx,
    "vectors": vectors,
    "row_field": "productions",
    "column_field": "attractions",
    "nan_as_zero": True,
}

fratar = Ipf(**args)
fratar.fit()
```

```
fratar.output.matrix_view
```

```
for line in fratar.report:
    print(line)
```

## 5.4 References

## PATH COMPUTATION

Given AequilibraE's incredibly fast path computation capabilities, one of its important use cases is the computation of paths on general transportation networks and between any two nodes, regardless of their type (centroid or not).

This use case supports the development of a number of computationally intensive systems, such as map-matching GPS data and simulation of Demand Responsive Transport (DRT, e.g. Uber) operators, for example.

Some basic usages of the AequilibraE path module consist on:

1. **Path computation:** computes the path between two arbitrary nodes.
2. **Network skimming:** can compute either the distance, the travel time, or your own cost matrix between a series of nodes.

Regarding computing paths through a network, part of its complexity comes from the fact that transportation models usually house networks for multiple transport modes, so the loads (links) available for a passenger car may be different than those available for a heavy truck, as it happens in practice.

For this reason, all path computation in AequilibraE happens through `Graph` objects. While users can operate models by simply selecting the mode they want AequilibraE to create graphs for, `Graph` objects can also be manipulated in memory or even created from networks that are *NOT housed inside an AequilibraE model*.

AequilibraE's graphs are the backbone of path computation, skimming and traffic assignment. Besides handling the selection of links available to each mode in an AequilibraE model, graphs also handle the existence of bi-directional links with direction-specific characteristics (e.g. speed limit, congestion levels, tolls, etc.). For this reason, the next section is entirely dedicated to this object.

### See also

- [`aequilibrae.paths.PathResults\(\)`](#)  
Class documentation
- [\*Path computation\*](#)  
Usage example
- [\*Network skimming\*](#)  
Usage example

## 6.1 AequilibraE Graphs

The `Graph` object is rather complex, but the difference between the graph and the physical links are the availability of two class member variables consisting of Pandas DataFrames: the **network** and the **graph**.

```
>>> from aequilibrae.paths import Graph

>>> g = Graph()

>>> g.network
>>> g.graph
```

### 6.1.1 Directionality

Links in the Network table (the Pandas representation of the project's *Links* table) are potentially bi-directional, and the directions allowed for traversal are dictated by the field *direction*, where -1 and 1 denote only BA and AB traversal respectively and 0 denotes bi-directionality.

Direction-specific fields must be coded in fields **\_AB** and **\_BA**, where the name of the field in the graph will be equal to the prefix of the directional fields. For example:

The fields **free\_flow\_travel\_time\_AB** and **free\_flow\_travel\_time\_BA** provide the same metric (*free\_flow\_travel\_time*) for each of the directions of a link, and the field of the graph used to set computations (e.g. field to minimize during path-finding, skimming, etc.) will be **free\_flow\_travel\_time**.

### 6.1.2 Graphs from a model

Building graphs directly from an AequilibraE model is the easiest option for beginners or when using AequilibraE in anger, as much of the setup is done by default.

```
>>> project = create_example(project_path, "coquimbo")

>>> project.network.build_graphs() # We build the graph for all modes
>>> graph = project.network.graphs['c'] # we grab the graph for cars
```

### 6.1.3 Manipulating graphs in memory

As mentioned before, the AequilibraE Graph can be manipulated in memory, with all its components available for editing. One of the simple tools available directly in the API is a method call for excluding one or more links from the Graph, **which is done in place**.

```
>>> graph.exclude_links([123, 975])
```

When working with very large networks, it is possible to filter the database to a small area for computation by providing a polygon that delimits the desired area, instead of selecting the links for deletion. The selection of links and nodes is limited to a spatial index search, which is very fast but not accurate.

```
>>> polygon = Polygon([(-71.35, -29.95), (-71.35, -29.90), (-71.30, -29.90), (-71.30, -29.95), (-71.35, -29.95)])
>>> project.network.build_graphs(limit_to_area=polygon)
```

More sophisticated graph editing is also possible, but it is recommended that changes to be made in the network DataFrame. For example:

```
# We can add fields to our graph
>>> graph.network["link_type"] = project.network.links.data["link_type"]

# And manipulate them
```

(continues on next page)

(continued from previous page)

```
>>> graph.network.loc[graph.network.link_type == "motorway", "speed_ab"] = 100
>>> graph.network.loc[graph.network.link_type == "motorway", "speed_ba"] = 100
```

### 6.1.4 Skimming settings

Skimming the field of a graph when computing shortest path or performing traffic assignment must be done by setting the skimming fields in the Graph object, and there are no limits (other than memory) to the number of fields that can be skimmed.

```
>>> graph.set_skimming(["distance", "travel_time"])
```

### 6.1.5 Setting centroids

Like other elements of the AequilibraE Graph, the user can also manipulate the set of nodes interpreted by the software as centroids in the Graph itself. This brings the advantage of allowing the user to perform assignment of partial matrices, matrices of travel between arbitrary network nodes and to skim the network for an arbitrary number of centroids in parallel, which can be useful when using AequilibraE as part of more general analysis pipelines. As seen above, this is also necessary when the network has been manipulated in memory.

**When setting regular network nodes as centroids, the user should take care in not blocking flows through “centroids”.**

```
>>> graph.prepare_graph(np.array([13, 169, 2197, 28561, 37123], np.int32))
>>> graph.set_blocked_centroid_flows(False)
```

#### See also

- [aequilibrae.paths.Graph\(\)](#)  
Class documentation
- [aequilibrae.paths.TransitGraph\(\)](#)  
Class documentation

### 6.1.6 Topological simplification

When using the AequilibraE graph to perform topological simplification of the graph, the user should be explicit in not removing dead ends from the graph, as that will result in simplification beyond pure topological simplification.

```
>>> graph.prepare_graph(np.array([13, 169, 2197, 28561, 37123], np.int32), remove_
↳dead_ends=False)
```

## 6.2 Examples

### 6.2.1 Path computation

#### Graph from arbitrary data

In this example, we demonstrate how to create an AequilibraE Graph from an arbitrary network.

We are using [Sioux Falls data](#), from TNTF.

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`

```
# Imports
import numpy as np
import pandas as pd

from aequilibrae.paths import Graph
```

We start by adding the path to load our arbitrary network.

```
net_file = "https://raw.githubusercontent.com/bstabler/TransportationNetworks/master/
↳SiouxFalls/SiouxFalls_net.tntp"
```

Let's read our data! We'll be using Sioux Falls transportation network data, but without geometric information. The data will be stored in a Pandas DataFrame containing information about initial and final nodes, link distances, travel times, etc.

```
net = pd.read_csv(net_file, skiprows=8, sep="\t", lineterminator="\n", usecols=np.
↳arange(1, 11))
```

The Graph object requires several default fields: `link_id`, `a_node`, `b_node`, and `direction`.

We need to manipulate the data to add the missing fields (`link_id` and `direction`) and rename the node columns accordingly.

```
net.insert(0, "link_id", np.arange(1, net.shape[0] + 1))
net = net.assign(direction=1)
net.rename(columns={"init_node": "a_node", "term_node": "b_node"}, inplace=True)
```

Now we can take a look in our network file

```
net.head()
```

Building an AequilibraE graph from our network is pretty straightforward. We assign our network to be the graph's network ...

```
graph = Graph()
graph.network = net
```

... and then set the graph's configurations.

```
graph.prepare_graph(np.arange(1, 25)) # sets the centroids for which we will perform_
↳computation

graph.set_graph("length") # sets the cost field for path computation

graph.set_skimming(["length", "free_flow_time"]) # sets the skims to be computed

graph.set_blocked_centroid_flows(False) # we don't block flows through centroids_
↳because all nodes

# in the Sioux Falls network are centroids
```

Two of AequilibraE's new features consist in directly computing path or skims.

Let's compute the path between nodes 1 and 17...

```
res = graph.compute_path(1, 17)
```

... and print the corresponding nodes...

```
res.path_nodes
```

... and the path links.

```
res.path
```

For path computation, when we call the method `graph.compute_path(1, 17)`, we are calling the class `PathComputation` and storing its results into a variable.

Notice that other methods related to path computation, such as `milepost` can also be used with `res`.

For skim computation, the process is quite similar. When calling the method `graph.compute_skims()` we are actually calling the class `NetworkSkimming`, and storing its results into `skm`.

```
skm = graph.compute_skims()
```

Let's get the values for 'free\_flow\_time' matrix.

```
skims = skm.results.skims
skims.get_matrix("free_flow_time")
```

Now we're all set!

Graph image credits to [Behance-network icons created by Sumitsaengtong - Flaticon](#)

## Path computation

In this example, we show how to perform path computation for Coquimbo, a city in La Serena Metropolitan Area in Chile.

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.PathResults()`

### Imports

```
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from aequilibrae.utils.create_example import create_example
```

We create the example project inside our temp folder

```
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

```
import logging
import sys
```

We the project opens, we can tell the logger to direct all messages to the terminal as well

```
logger = project.logger
stdout_handler = logging.StreamHandler(sys.stdout)
formatter = logging.Formatter("%(asctime)s;%(levelname)s ; %(message)s")
stdout_handler.setFormatter(formatter)
logger.addHandler(stdout_handler)
```

### Path Computation

We build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with ``NaN``s.
# This is true, but we won't use those fields.
```

We grab the graph for cars,

```
graph = project.network.graphs["c"]
```

we'll also see what graphs are available.

```
project.network.graphs.keys()
```

Let's say we want to minimise the distance,

```
graph.set_graph("distance")
```

and will skim time and distance while we are at it.

```
graph.set_skimming(["travel_time", "distance"])
```

Let's create a path results object from the graph and compute a path from node 32343 (near the airport) to 22041 (near Fort Lambert, overlooking Coquimbo Bay).

```
res = graph.compute_path(32343, 22041)
```

Computing paths directly from the graph is more straightforward, though we could alternatively use `PathComputation` class to achieve the same result.

```
# from aequilibrae.paths import PathResults

# res = PathResults()
# res.prepare(graph)
# res.compute_path(32343, 22041)
```

We can get the sequence of nodes we traverse

```
res.path_nodes
```

We can get the link sequence we traverse

```
res.path
```

We can get the mileposts for our sequence of nodes

```
res.milepost
```

Additionally, you can also provide `early_exit=True` or `a_star=True` to `compute_path` to adjust its path-finding behavior.

Providing `early_exit=True` allows you to quit the path-finding procedure once it discovers the destination. This setup works better for topographically close origin-destination pairs. However, exiting early may cause subsequent calls to `update_trace` to recompute the tree in cases where it typically wouldn't.

```
res = graph.compute_path(32343, 22041, early_exit=True)
```

If you prefer to find a potentially non-optimal path to the destination faster, provide `a_star=True` to use  $A^*$  with a heuristic. This method always recomputes the path's nodes, links, skims, and mileposts with `update_trace`. Note that `a_star` takes precedence over `early_exit`.

```
res = graph.compute_path(32343, 22041, a_star=True)
```

If you are using `a_star`, it is possible to use different heuristics to compute the path. By default, an equirectangular heuristic is used, and we can view the available heuristics via:

```
res.get_heuristics()
```

If you prefer a more accurate but slower heuristic, you can choose "haversine", by setting:

```
res = graph.compute_path(32343, 22041, a_star=True, heuristic="haversine")
```

Suppose you want to adjust the path to the University of La Serena instead of Fort Lambert. It is possible to adjust the existing path computation for this alteration. The following code allows both `early_exit` and  $A^*$  settings to persist when calling `update_trace`. If you'd like to adjust them for subsequent path re-computations set the `res.early_exit` and `res.a_star` attributes. Notice that this procedure is much faster when you have large networks.

```
res.a_star = False
res.update_trace(73131)

res.path_nodes
```

If you want to show the path in Python.

We do NOT recommend this, though... It is very slow for real networks.

```
links = project.network.links.data.set_index("link_id")
links = links.loc[res.path]
```

```
links.explore(color="blue", style_kws={'weight':5})
```

```
project.close()
```

### Network skimming

In this example, we show how to perform network skimming for Coquimbo, a city in La Serena Metropolitan Area in Chile.

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.NetworkSkimming()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from aequilibrae.utils.create_example import create_example
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

```
import logging
import sys
```

When the project opens, we can tell the logger to direct all messages to the terminal as well

```
logger = project.logger
stdout_handler = logging.StreamHandler(sys.stdout)
formatter = logging.Formatter("%(asctime)s;%(levelname)s ; %(message)s")
stdout_handler.setFormatter(formatter)
logger.addHandler(stdout_handler)
```

### Network Skimming

```
import numpy as np
```

Let's build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with ``NaN``s.
# This is true, but we won't use those fields.
```

We grab the graph for cars

```
graph = project.network.graphs["c"]

# we also see what graphs are available
project.network.graphs.keys()

# let's say we want to minimize the distance
```

(continues on next page)

(continued from previous page)

```
graph.set_graph("distance")

# And will skim distance while we are at it, other fields like ``free_flow_time`` or
↳ ``travel_time``
# can be added here as well
graph.set_skimming(["distance"])

# But let's say we only want a skim matrix for nodes 28-40, and 49-60 (inclusive),
# these happen to be a selection of western centroids.
graph.prepare_graph(np.array(list(range(28, 41)) + list(range(49, 91))))
```

And run the skimming

```
skm = graph.compute_skims()
```

Building network skims directly from the graph is more straightforward, though we could alternatively use the class `NetworkSkimming` to achieve the same result.

```
# from aequilibrae.paths import NetworkSkimming

# skm = NetworkSkimming(graph)
# skm.execute()
```

The result is an `AequilibraEMatrix` object

```
skims = skm.results.skims

# Which we can manipulate directly from its temp file, if we wish
skims.matrices[:3, :3, :]
```

Or access each matrix, lets just look at the first 3x3

```
skims.distance[:3, :3]
```

We can save it to the project if we want

```
skm.save_to_project("base_skims")
```

We can also retrieve this skim record to write something to its description

```
matrices = project.matrices
mat_record = matrices.get_record("base_skims")
mat_record.description = "minimized distance while also skimming distance for just a
↳ few nodes"
mat_record.save()
```

```
project.close()
```



## STATIC TRAFFIC ASSIGNMENT

Performing traffic assignment or computing paths through a network is always a little different in each platform, and in AequilibraE is no exception, but we strive to make the static traffic assignment process as simple as possible so that seasoned modelers can easily migrate their models and workflows to the platform.

Although modeling with AequilibraE should feel somewhat familiar to seasoned modelers, especially those used to programming, the mechanics of traffic assignment in AequilibraE might be foreign to some users, so this section of the documentation will include discussions of the mechanics of some of these procedures and some light discussion on its motivation.

### 7.1 Traffic Assignment Procedure

Along with a network data model, traffic assignment is the most technically challenging portion to develop in a modeling platform, especially if you want it to be *fast*. In AequilibraE, we aim to make it as fast as possible, without making it overly complex to use, develop and maintain, although we know that *complex* is subjective.

Running traffic assignment in AequilibraE consists in creating the traffic classes that are going to be assigned, add them to a traffic assignment object, set the traffic assignment parameters, and run the assignment.

#### 7.1.1 TrafficClass

The `TrafficClass` object holds all the information pertaining to a specific traffic class to be assigned. There are three pieces of information that are required in the instantiation of this class:

- **name:** name of the class. It has to be unique among all classes used in a multi-class traffic assignment
- **graph:** it is the `Graph` object corresponding to that particular traffic class/mode
- **matrix:** it is the AequilibraE matrix with the demand for that traffic class, which can have an arbitrary number of user-classes setup as different layers (cores) of the matrix object.

```
>>> from aequilibrae.paths import TrafficClass

>>> project = create_example(project_path)
>>> project.network.build_graphs()

# We get the graphs for cars and trucks
>>> graph_car = project.network.graphs['c']
>>> graph_truck = project.network.graphs['T']

# And also get the matrices for cars and trucks
>>> matrix_car = project.matrices.get_matrix("demand_mc")
>>> matrix_car.computational_view("car")
```

(continues on next page)

(continued from previous page)

```

>>> matrix_truck = project.matrices.get_matrix("demand_mc")
>>> matrix_truck.computational_view("trucks")

# We create the Traffic Classes
>>> tc_car = TrafficClass("car", graph_car, matrix_car)
>>> tc_truck = TrafficClass("truck", graph_truck, matrix_truck)

```

It is also possible to modify the default values for the following parameters of a traffic classe by using a method call:

- **Passenger-car equivalent (PCE)** is the standard way of modeling multi-class traffic assignment equilibrium in a consistent manner (see<sup>3</sup> for the technical detail), and its value is set to 1.0 by default.

```
>>> tc_truck.set_pce(2.5)
```

- **Fixed costs:** in case there are fixed costs associated with the traversal of links in the network, the user can provide the name of the field in the graph that contains that network.

```
>>> tc_truck.set_fixed_cost("distance")
```

- **Value-of-Time (VoT)** is the mechanism to bring time and monetary costs into a consistent basis within a generalized cost function. In the event that fixed cost is measured in the same unit as free-flow travel time, then *vot* must be set to 1.0.

```
>>> tc_truck.set_vot(0.35)
```

## 7.1.2 TrafficAssignment

```

>>> from aequilibrae.paths import TrafficAssignment
>>> assig = TrafficAssignment()

```

AequilibraE's traffic assignment is organized within an object with the same name which contains a series of member variables that should be populated by the user, providing thus a complete specification of the assignment procedure.

- **classes:** list of completely specified traffic classes

```

# You can add one or more traffic classes to the assignment instance
>>> assig.add_class(tc_truck)

>>> assig.set_classes([tc_car, tc_truck])

```

- **vdf:** the volume-delay function (VDF) to be used, being one of BPR, BPR2, CONICAL, or INRETS

```
>>> assig.set_vdf('BPR')
```

- **vdf\_parameters:** the parameters to be used in the volume-delay function, other than volume, capacity and free-flow time. VDF parameters must be consistent across all graphs.

Because AequilibraE supports different parameters for each link, its implementation is the most general possible while still preserving the desired properties for multi-class assignment, but the user needs to provide individual values for each link *OR* a single value for the entire network.

<sup>3</sup> Zill, J., Camargo, P., Veitch, T., Daisy, N. (2019) "Toll Choice and Stochastic User Equilibrium: Ticking All the Boxes", Transportation Research Record, 2673(4):930-940. Available in: <https://doi.org/10.1177%2F0361198119837496>

Setting the VDF parameters should be done *AFTER* setting the VDF function of choice and adding traffic classes to the assignment, or it will *fail*.

```
# The VDF parameters can be either an existing field in the graph, passed as a
↳parameter:
>>> assig.set_vdf_parameters({"alpha": "b", "beta": "power"})

# Or as a global value:
>>> assig.set_vdf_parameters({"alpha": 0.15, "beta": 4})
```

- **time\_field**: the field of the graph that corresponds to free-flow travel time. The procedure will collect this information from the graph associated with the first traffic class provided, but will check if all graphs have the same information on free-flow travel time

```
>>> assig.set_time_field("free_flow_time")
```

- **capacity\_field**: the field of the graph that corresponds to the link capacity. The procedure will collect this information from the graph associated with the first traffic class provided, but will check if all graphs have the same information on capacity

```
>>> assig.set_capacity_field("capacity")
```

- **algorithm**: the assignment algorithm to be used, being one of all-or-nothing, bfw, cfw, fw, franke-wolfe, or msa.

```
>>> assig.set_algorithm("bfw")
```

### Skimming while assigning

AequilibraE allows for skimming to be performed during assignment, and maintains both the skimming of the final iteration, as well as the blended skim for all iterations.

This is the case because, strictly speaking, the equilibrium travel time is the one resulting at the end of the last assignment iteration, while the most correct distance and toll skims, for example, are those resulting from the blended skim of all iterations.

The user can select the fields they want to skim, as well save the skims to disk (and the project) at the end of the assignment procedure, where skims are tagged with suffixes “\_final” and “\_blended” for easy identification.

```
>>> assig.set_skimming_fields(["distance"])
>>> assig.execute()
>>> assig.save_skims("one_matrix_name")
```

### Assigning sparse matrices

Modern Activity-Based models (and even some trip-based and tour-based ones) result on incredibly sparse demand matrices, which opens up a significant opportunity to save time during assignment by using early-exiting during the path-computation phase of assignment.

AequilibraE is capable of leveraging this opportunity, and it does so automatically whenever the user **does NOT set skimming for the assignment or any individual traffic class graphs**.

In this case, AequilibraE has a convenient method to skim the final iteration of the assignment as it had been computed during the assignment itself. This method call requires a new iteration of path computation to be made, but assignments with highly sparse matrices and more than 10 iterations would still experience a significant speedup, which comes at the cost of not having blended skims as a sub-product of the assignment.

Time savings of up to 40% should be achievable in cases of micro-simulated ABMs with a large number of zones and over 100 iterations of assignment.

```
>>> assig.execute()
>>> skims = assig.skim_congested(skim_fields=["distance"], return_matrices=True)
>>> assig.save_skims("another_matrix_name")
```

The list of fields defined by the user for skimming is added to the congested time and the assignment cost from the last iteration of the assignment by default. These matrices are named `__congested_time__` and `__assignment_cost__` respectively.

See the the example *Assigning sparse matrices* for a more practical explanation of this feature.

### Volume-delay function

For now, the VDF functions available in AequilibraE are

- BPR<sup>1</sup>

$$CongestedTime_i = FreeFlowTime_i * (1 + \alpha * (\frac{Volume_i}{Capacity_i})^\beta)$$

- Spiess' conical<sup>2</sup>

$$CongestedTime_i = FreeFlowTime_i * (2 + \sqrt[2]{[\alpha^2 * (1 - \frac{Volume_i}{Capacity_i})^2 + \beta^2]} - \alpha * (1 - \frac{Volume_i}{Capacity_i}) - \beta)$$

- and French INRETS (alpha < 1)

Before capacity

$$CongestedTime_i = FreeFlowTime_i * \frac{1.1 - (\alpha * \frac{Volume_i}{Capacity_i})}{1.1 - \frac{Volume_i}{Capacity_i}}$$

and after capacity

$$CongestedTime_i = FreeFlowTime_i * \frac{1.1 - \alpha}{0.1} * (\frac{Volume_i}{Capacity_i})^2$$

More functions will be added as needed/requested/possible.

### 7.1.3 Setting Preloads

We can also optionally include a preload vector for constant flows which are not being otherwise modelled. For example, this can be used to account for scheduled public transport vehicles, adding an equivalent load to each link along the route accordingly. AequilibraE supports various conditions for which PT trips to include in the preload, and allows the user to specify the PCE for each type of vehicle in the public transport network.

To create a preload for public transport vehicles operating between 8 AM to 10 AM, do the following:

```
>>> from aequilibrae.transit import Transit

# Times are specified in seconds from midnight
>>> transit = Transit(project)
>>> preload = transit.build_pt_preload(start=8*3600, end=10*3600)
```

(continues on next page)

<sup>1</sup> Hampton Roads Transportation Planning Organization, Regional Travel Demand Model V2 (2020). Available in: [https://www.hrtpo.org/uploads/docs/2020\\_HamptonRoads\\_Modelv2\\_MethodologyReport.pdf](https://www.hrtpo.org/uploads/docs/2020_HamptonRoads_Modelv2_MethodologyReport.pdf)

<sup>2</sup> Spiess, H. (1990) "Technical Note—Conical Volume-Delay Functions." *Transportation Science*, 24(2): 153-158. Available in: <https://doi.org/10.1287/trsc.24.2.153>

(continued from previous page)

```
# Add the preload to the assignment
>>> assig.add_preload(preload, 'PT_vehicles')
```

### 7.1.4 Executing an Assignment

Finally, run traffic assignment!

```
>>> assig.execute()
```

### 7.1.5 References

## 7.2 Traffic Assignment Insights

While single-class equilibrium traffic assignment<sup>1</sup> is mathematically simple, multi-class traffic assignment<sup>2</sup>, especially when including monetary costs (e.g. tolls) and multiple classes with different passenger-car equivalent (PCE) factors, requires more sophisticated mathematics.

As it is to be expected, strict convergence of multi-class equilibrium assignments comes at the cost of specific technical requirements and more advanced equilibration algorithms have slightly different requirements.

### 7.2.1 Technical requirements

This documentation is not intended to discuss in detail the mathematical requirements of multi-class traffic assignment, which can be found on<sup>3</sup>.

A few requirements, however, need to be made clear.

- All traffic classes shall have identical free-flow travel times throughout the network
- Each class shall have an unique passenger-car equivalency (PCE) factor for all links
- Volume-delay functions shall be monotonically increasing. *Well behaved* functions are always something we are after

For the conjugate and biconjugate Frank-Wolfe algorithms it is also necessary that the VDFs are differentiable.

### 7.2.2 Cost function

AequilibrE supports class-specific cost functions, where each class can include the following:

- Passenger-car equivalent (PCE)
- Link-based fixed financial cost components
- Value-of-Time (VoT)

<sup>1</sup> Wardrop, J.G. (1952) "Some theoretical aspects of road traffic research." Proceedings of the Institution of Civil Engineers 1952, 1(3):325-362. Available in: <https://www.icevirtualibrary.com/doi/abs/10.1680/ipeds.1952.11259>

<sup>2</sup> Marcotte, P., Patriksson, M. (2007) "Chapter 10 Traffic Equilibrium - Handbooks in Operations Research and Management Science, Vol 14", Elsevier. Editors Barnhart, C., Laporte, G. [https://doi.org/10.1016/S0927-0507\(06\)14010-4](https://doi.org/10.1016/S0927-0507(06)14010-4)

<sup>3</sup> Zill, J., Camargo, P., Veitch, T., Daisy, N. (2019) "Toll Choice and Stochastic User Equilibrium: Ticking All the Boxes", Transportation Research Record, 2673(4):930-940. Available in: <https://doi.org/10.1177%2F0361198119837496>

### 7.2.3 Convergence criteria

Convergence in AequilibraE is measured solely in terms of relative gap, which is a somewhat old recommendation<sup>4</sup>, but it is still the most used measure in practice, and is detailed below.

$$RelGap = \frac{\sum_a V_a^* * C_a - \sum_a V_a^{AoN} * C_a}{\sum_a V_a^* * C_a}$$

The algorithm's two stop criteria currently used are the maximum number of iterations and the target Relative Gap, as specified above. These two parameters are described in detail in the *Assignment* section, in the *Parameters YAML File*.

### 7.2.4 Available algorithms

All algorithms have been implemented as a single software class, as the differences between them are simply the step direction and step size after each iteration of all-or-nothing assignment, as shown in the table below

Algorithm	Step direction	Step size
Method of Successive Averages	All-or-Nothing Assignment (AoN)	Function of the iteration number
Frank-Wolfe	All-or-Nothing Assignment (AoN)	Optimal value derived from Wardrop's principle
Biconjugate Frank-Wolfe	Biconjugate direction (Current and two previous AoN)	Optimal value derived from Wardrop's principle
Conjugate Frank-Wolfe	Conjugate direction (Current and previous AoN)	Optimal value derived from Wardrop's principle

#### Note

Our implementations of the conjugate and biconjugate Frank-Wolfe methods should be inherently proportional<sup>5</sup>, but we have not yet carried the appropriate testing that would be required for an empirical proof.

#### Method of Successive Averages (MSA)

This algorithm has been included largely for historical reasons, and we see very little reason to use it. Yet, it has been implemented with the appropriate computation of relative gap computation and supports all the analysis features available.

#### Frank-Wolfe (FW)

The implementation of Frank-Wolfe in AequilibraE is extremely simple from an implementation point of view, as we use a generic optimizer from SciPy as an engine for the line search, and it is a standard implementation of the algorithm introduced by LeBlanc in 1975<sup>6</sup>.

#### Biconjugate Frank-Wolfe (BFW)

The biconjugate Frank-Wolfe algorithm is currently the fastest converging link-based traffic assignment algorithm used in practice, and it is the recommended algorithm for AequilibraE users. Due to its need for previous iteration data, it **requires more memory** during runtime, but very large networks should still fit nicely in systems with 16Gb of RAM.

<sup>4</sup> Rose, G., Daskin, M., Koppelman, F. (1988) "An examination of convergence error in equilibrium traffic assignment models", Transportation Research Part B, 22(4):261-274. Available in: [https://doi.org/10.1016/0191-2615\(88\)90003-3](https://doi.org/10.1016/0191-2615(88)90003-3)

<sup>5</sup> Florian, M., Morosan, C.D. (2014) "On uniqueness and proportionality in multi-class equilibrium assignment", Transportation Research Part B, 70:261-274. Available in: <https://doi.org/10.1016/j.trb.2014.06.011>

<sup>6</sup> LeBlanc, L.J., Morlok, E.K., Pierskalla, W.P. (1975) "An efficient approach to solving the road network equilibrium traffic assignment problem". Transportation Research, 9(5):309-318. Available in: [https://doi.org/10.1016/0041-1647\(75\)90030-1](https://doi.org/10.1016/0041-1647(75)90030-1)

## Conjugate Frank-Wolfe

The conjugate direction algorithm was introduced in 2013<sup>7</sup>, which is quite recent if you consider that the Frank-Wolfe algorithm was first applied in the early 1970's, and it was introduced at the same time as its Biconjugate evolution, so it was born outdated.

### 7.2.5 Implementation details & tricks

A few implementation details and tricks are worth mentioning not because they are needed to use the software, but because they were things we grappled with during implementation, and it would be a shame not register it for those looking to implement their own variations of this algorithm or to slight change it for their own purposes.

- The relative gap is computed with the cost used to compute the All-or-Nothing portion of the iteration, and although the literature on this is obvious, we took some time to realize that we should re-compute the travel costs only **AFTER** checking for convergence.
- In some instances, Frank-Wolfe is extremely unstable during the first iterations on assignment, resulting on numerical errors on our line search. We found that setting the step size to the corresponding MSA value (1/current iteration) resulted in the problem quickly becoming stable and moving towards a state where the line search started working properly. This technique was generalized to the conjugate and biconjugate Frank-Wolfe algorithms.

### 7.2.6 Multi-threaded implementation

AequilibraE's All-or-Nothing assignment (the basis of all the other algorithms) has been parallelized in Python using the threading library, which is possible due to the work we have done with memory management to release Python's Global Interpreter Lock.

Other opportunities for parallelization, such as the computation of costs and its derivatives (required during the line-search optimization step), as well as all linear combination operations for vectors and matrices have been achieved through the use of OpenMP in pure Cython code. These implementations can be found on a file called `parallel_numpy.pyx` if you are curious to look at.

Much of the gains of going back to Cython to parallelize these functions came from making in-place computation using previously existing arrays, as the instantiation of large NumPy arrays can be computationally expensive.

### 7.2.7 Handling the network

The other important topic when dealing with multi-class assignment is to have a single consistent handling of networks, as in the end there is only physical network across all modes, regardless of access differences to each mode (e.g. truck lanes, high-occupancy lanes, etc.). This handling is often done with something called a *super-network*.

A super-network consists in having all classes with the same links in their sub-graphs, but assigning *b\_node* identical to *a\_node* for all links whenever a link is not available for a certain user class.

This approach is slightly less efficient when we are computing shortest paths, but it gets eliminated when topologically compressing the network for centroid-to-centroid path computation and it is a LOT more efficient when we are aggregating flows.

The use of the AequilibraE project and its built-in methods to build graphs ensure that all graph will be built in a consistent manner and multi-class assignment is possible.

<sup>7</sup> Mitradjieva, M., Lindberg, P.O. (2013) "The Stiff Is Moving—Conjugate Direction Frank-Wolfe Methods with Applications to Traffic Assignment". *Transportation Science*, 47(2):280-293. Available in: <https://doi.org/10.1287/trsc.1120.0409>

## 7.2.8 References

## 7.3 Traffic Assignment Validation

Similar to other complex algorithms that handle a large amount of data through complex computations, traffic assignment procedures can always be subject to at least one very reasonable question: Are the results right?

For this reason, we have used all equilibrium traffic assignment algorithms available in AequilbraE to solve standard instances used in academia for comparing algorithm results.

Instances can be downloaded [here](#).

All tests were performed with the AequilbraE version 1.1.0.


As shown below, the results produced by AequilbraE are within expected, although some differences have been found, particularly for Winnipeg. We suspect that there are issues with the reference results and welcome further investigations.

Chicago


Network stats

- Links: 39,018
- Nodes: 12,982
- Zones: 1,790


biconjugate Frank-Wolfe

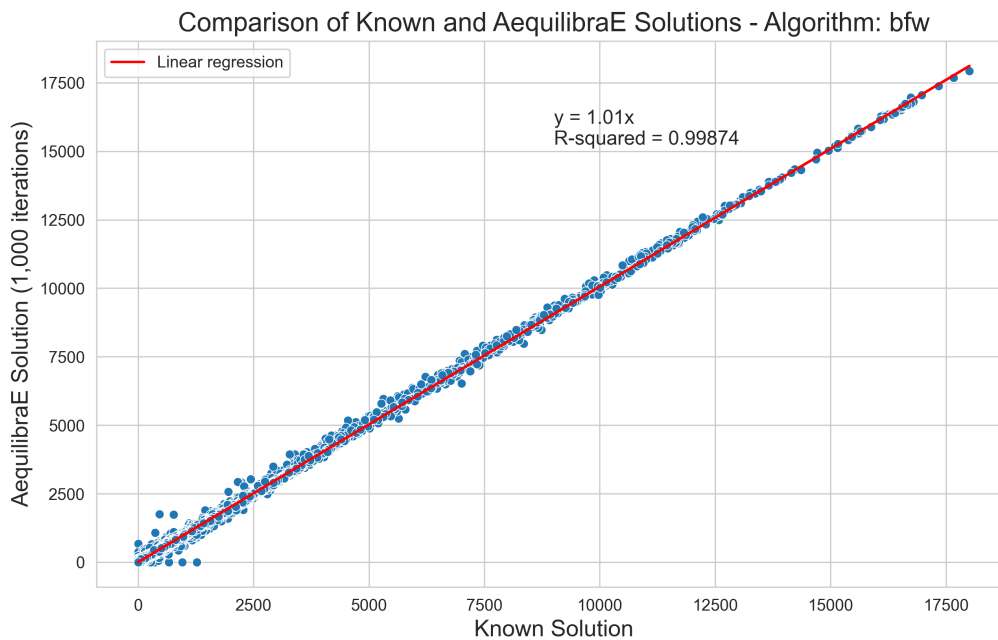


Conjugate Frank-Wolfe

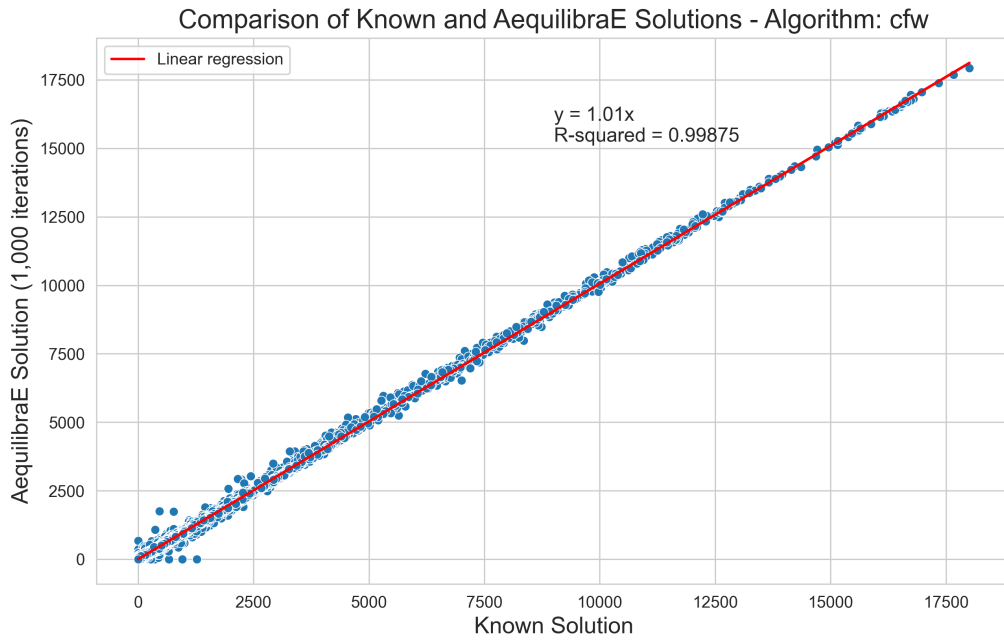

Frank-Wolfe

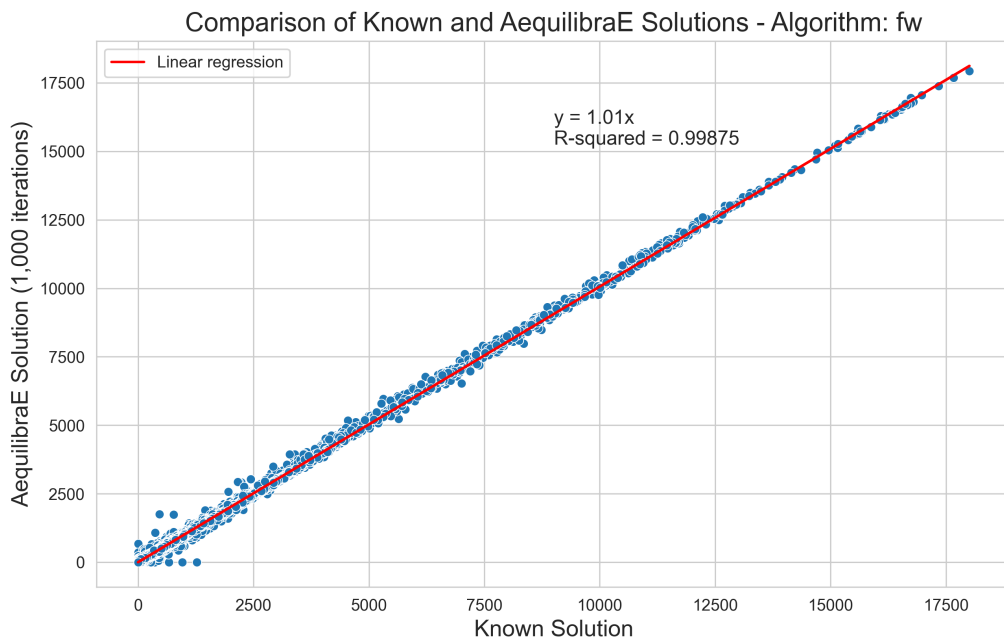

MSA

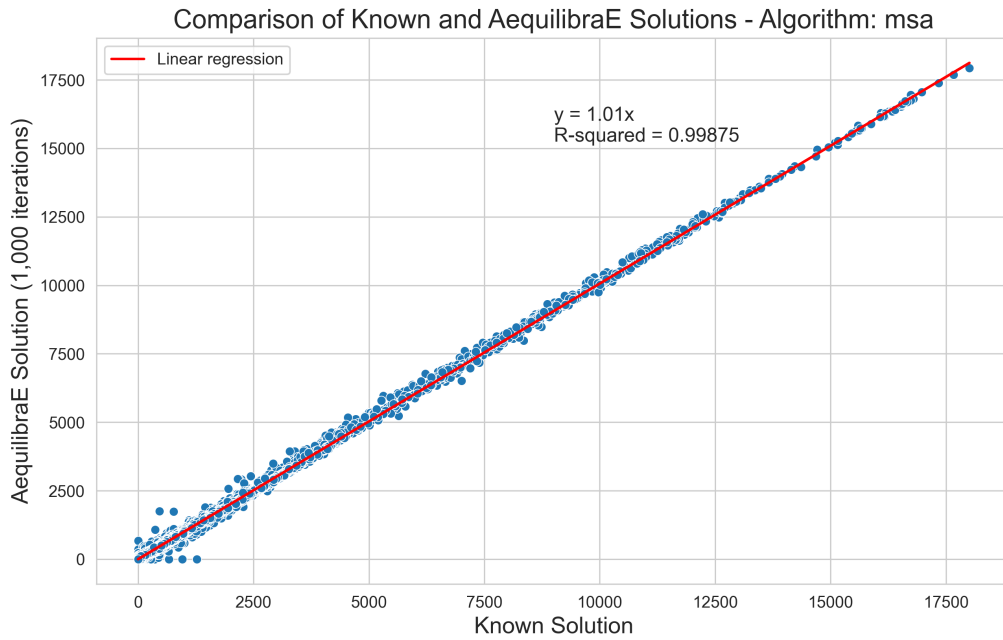


Barcelona


Network stats

- Links: 2,522
- Nodes: 1,020
- Zones: 110


biconjugate Frank-Wolfe

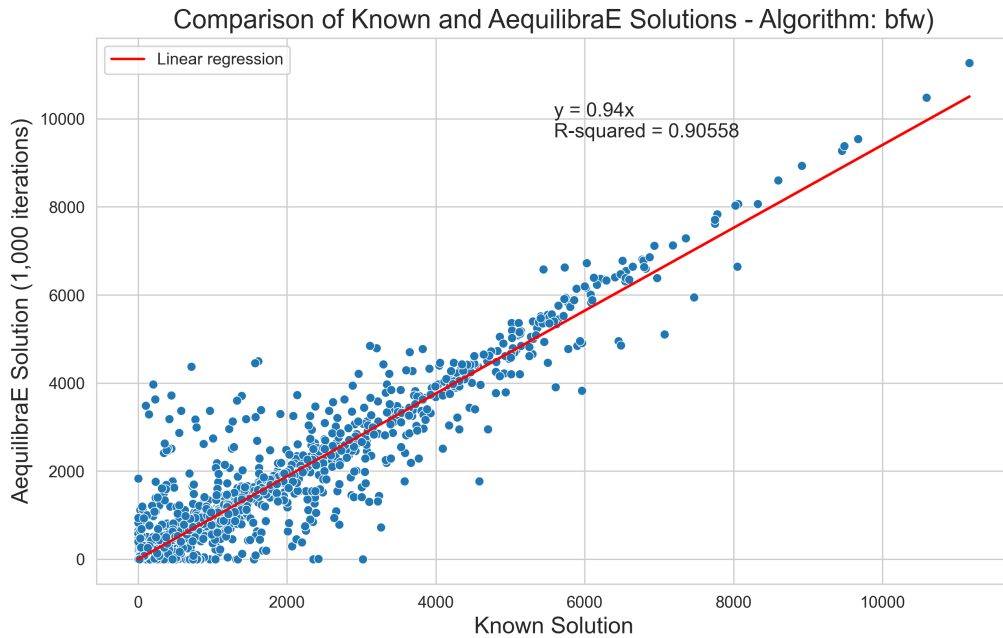


Conjugate Frank-Wolfe

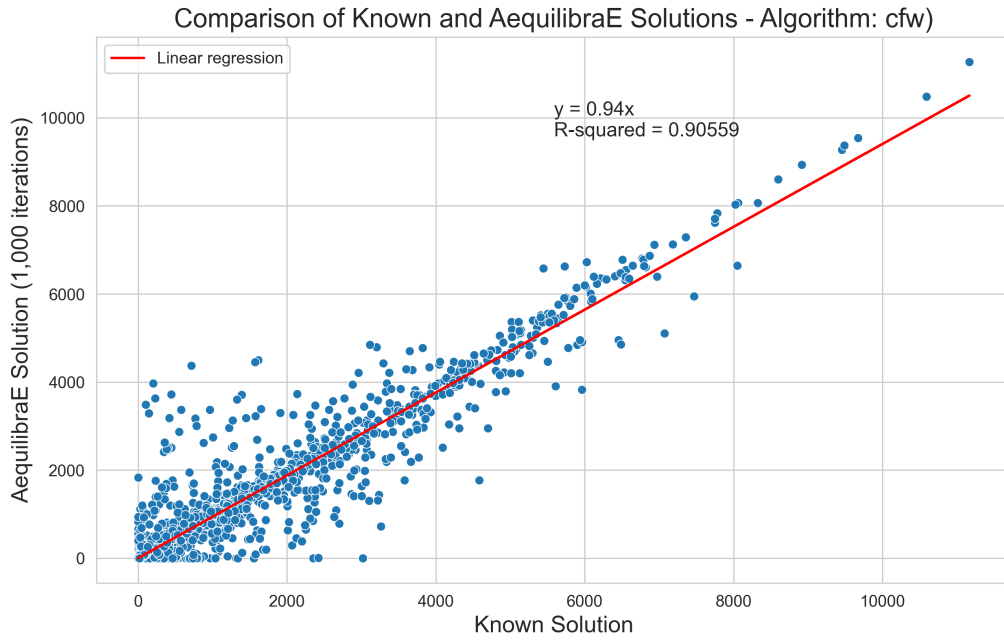

Frank-Wolfe

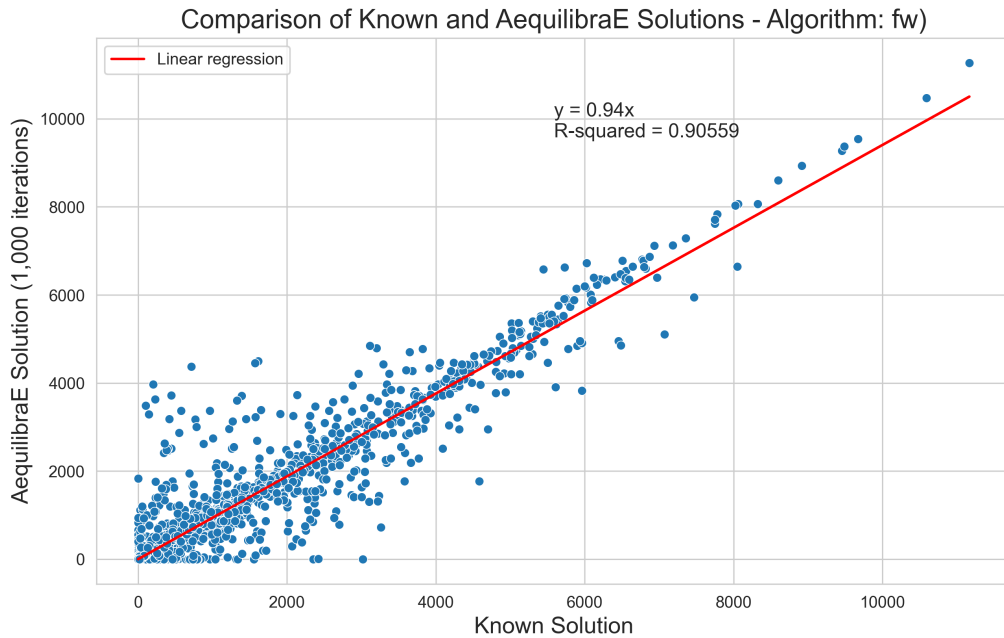

MSA

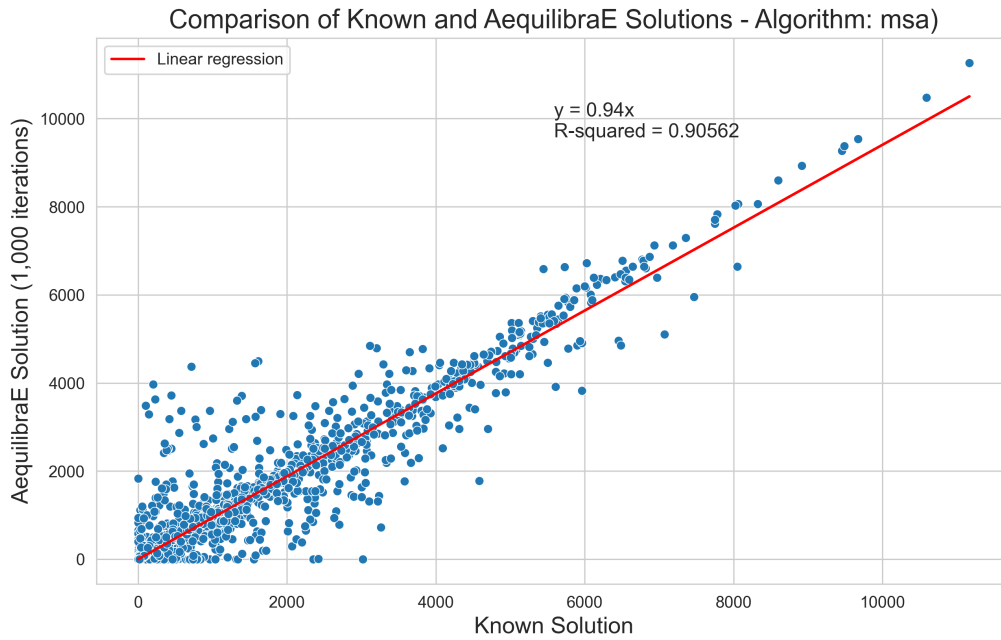


Winnipeg


Network stats

- Links: 914
- Nodes: 416
- Zones: 38


biconjugate Frank-Wolfe

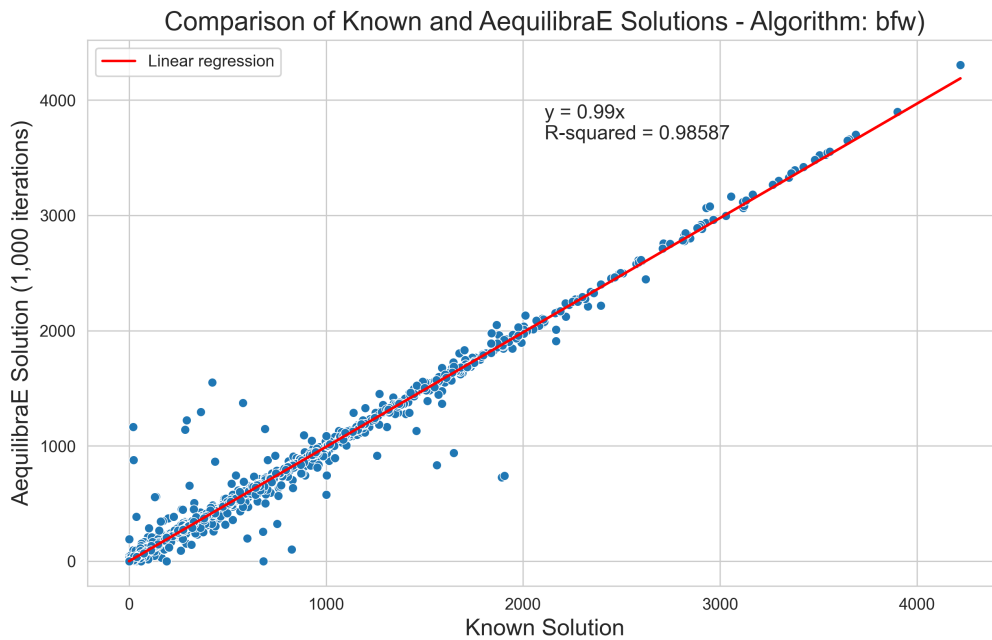


Conjugate Frank-Wolfe

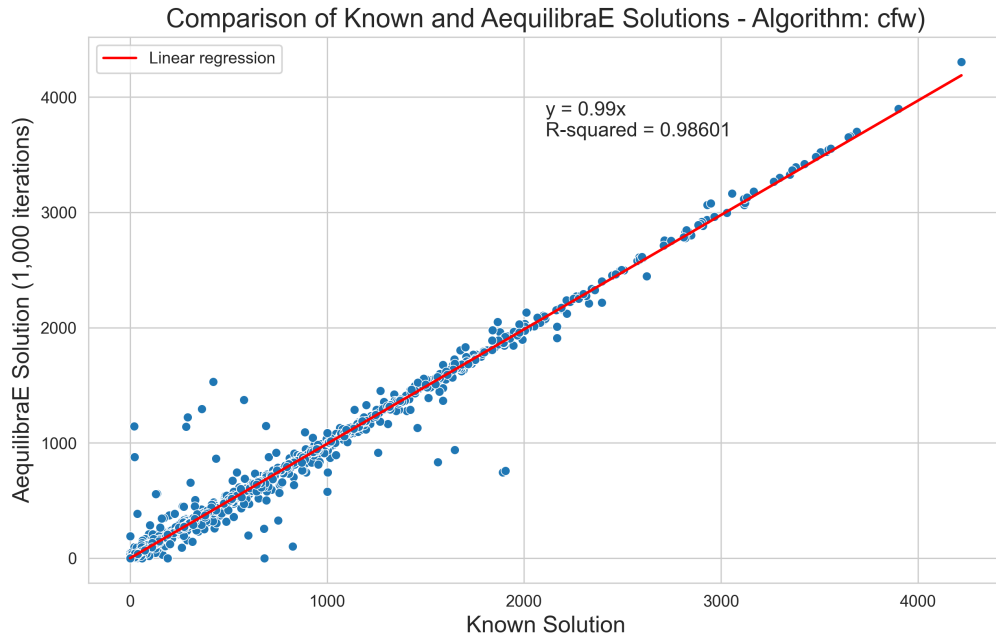

Frank-Wolfe

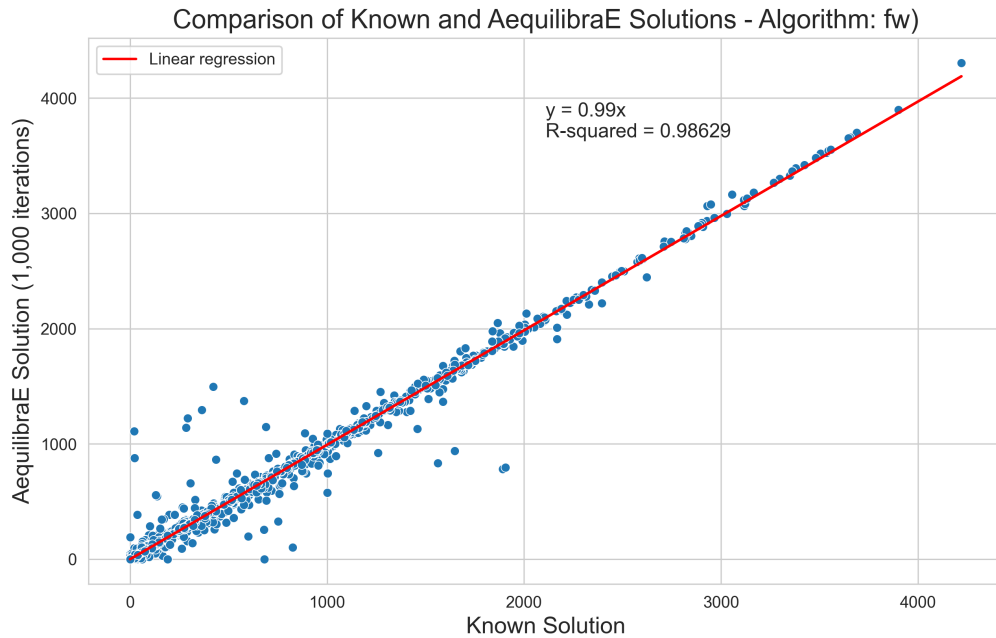

MSA

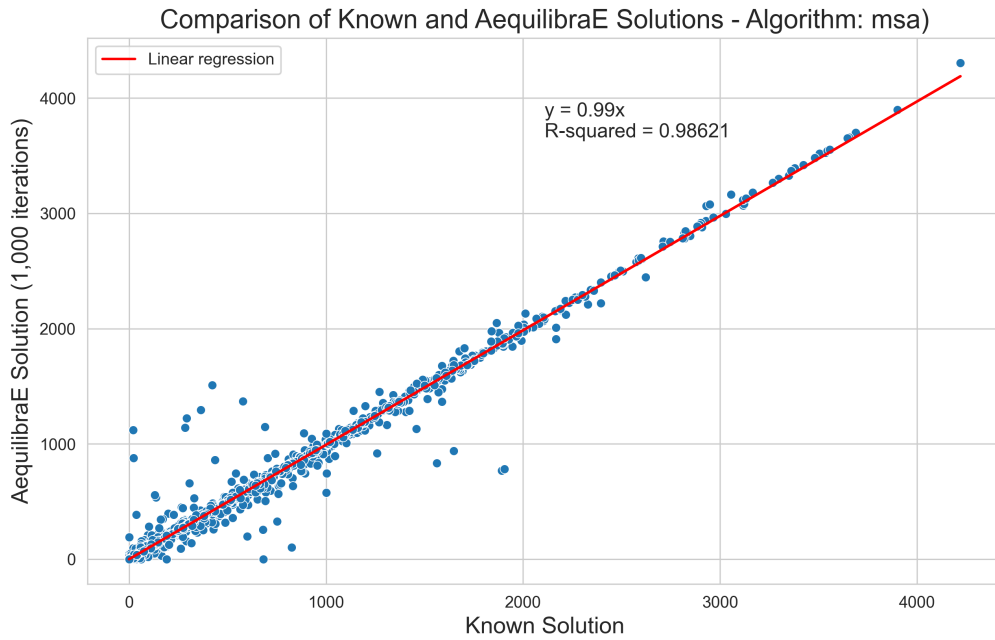


Anaheim


Network stats

- Links: 914
- Nodes: 416
- Zones: 38


biconjugate Frank-Wolfe

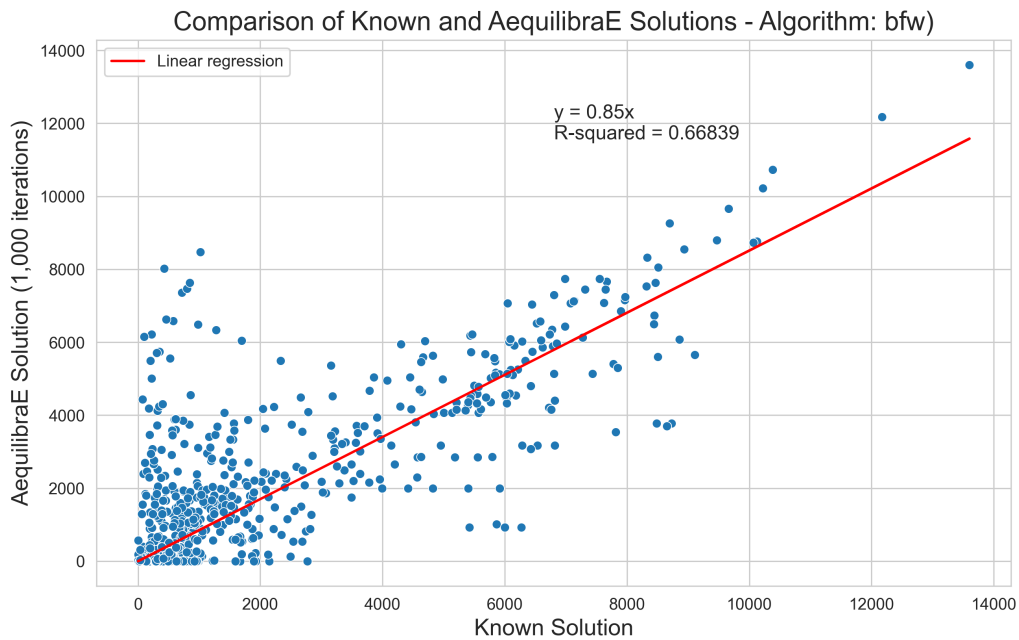


Conjugate Frank-Wolfe

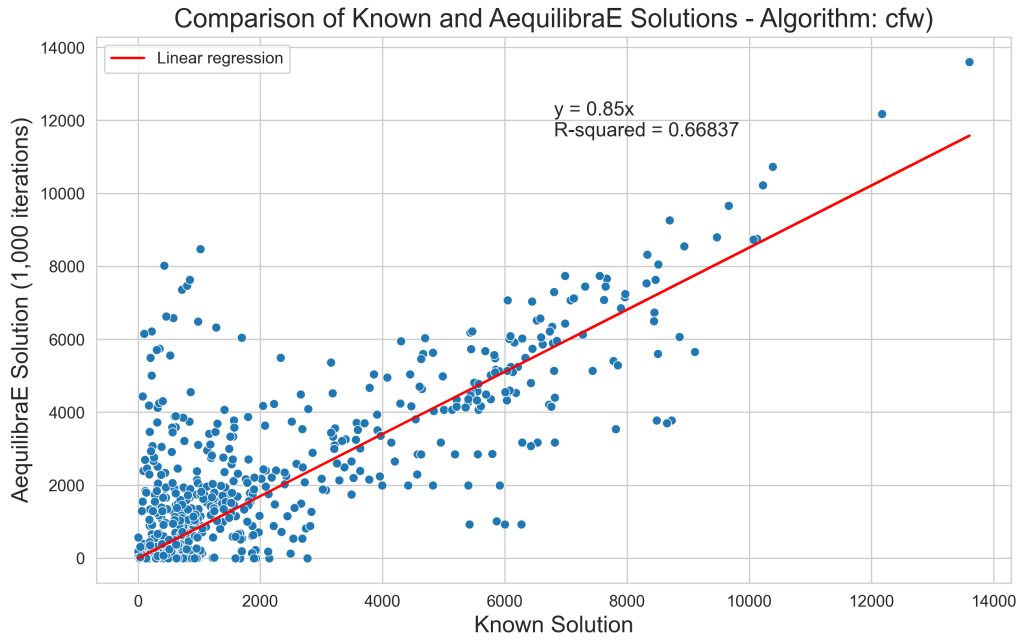

Frank-Wolfe

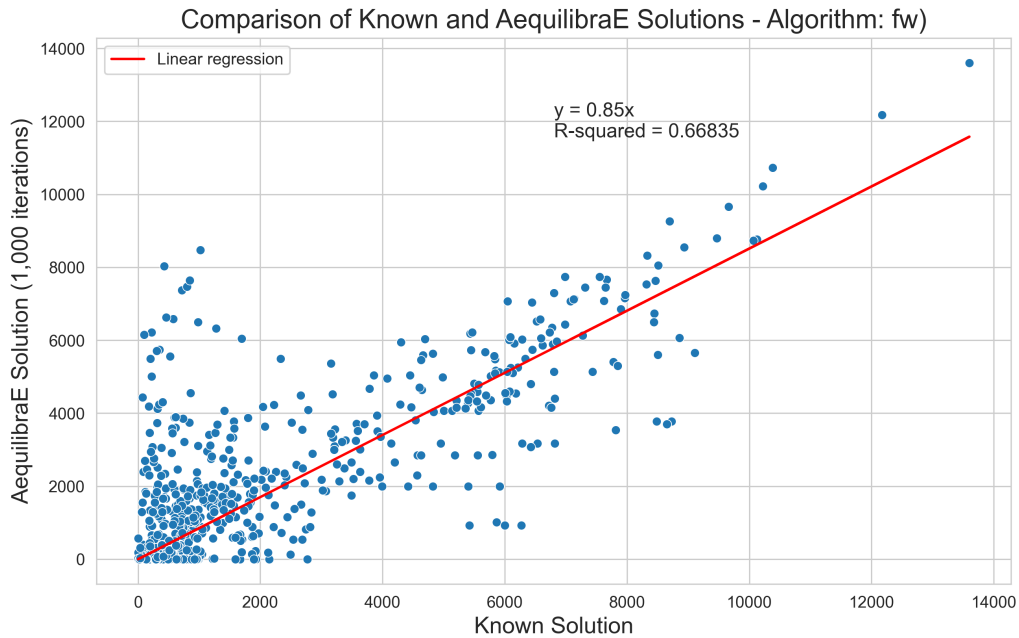

MSA

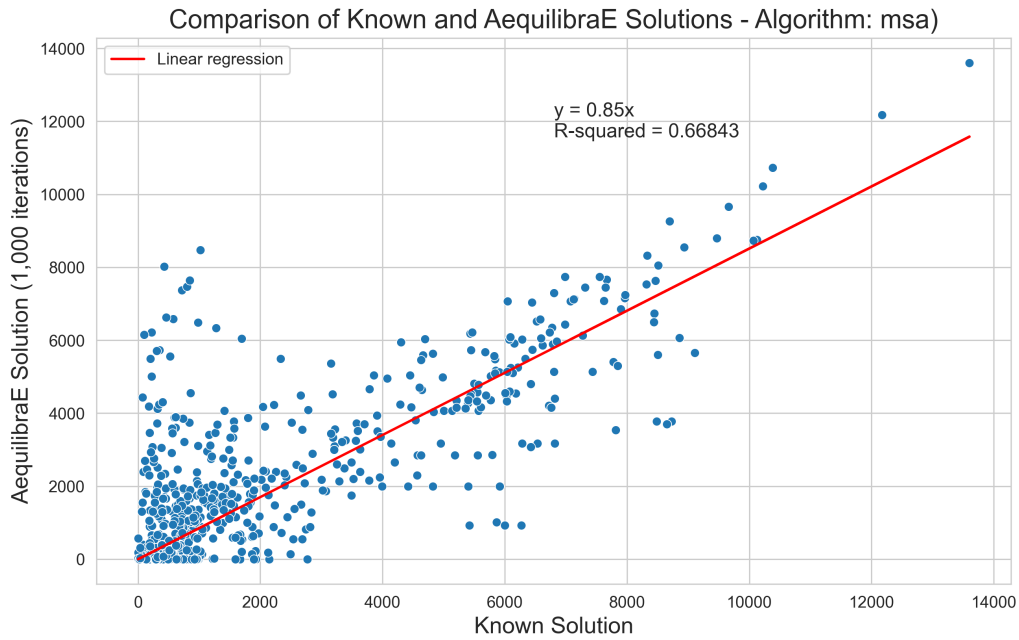


Sioux Falls


Network stats

- Links: 76
- Nodes: 24
- Zones: 24


biconjugate Frank-Wolfe

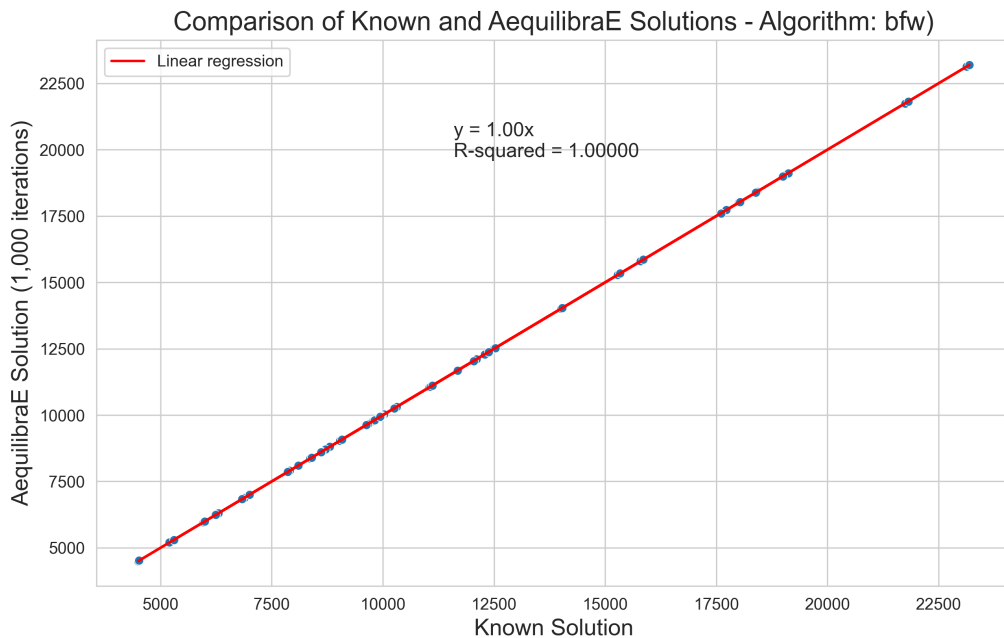


Conjugate Frank-Wolfe

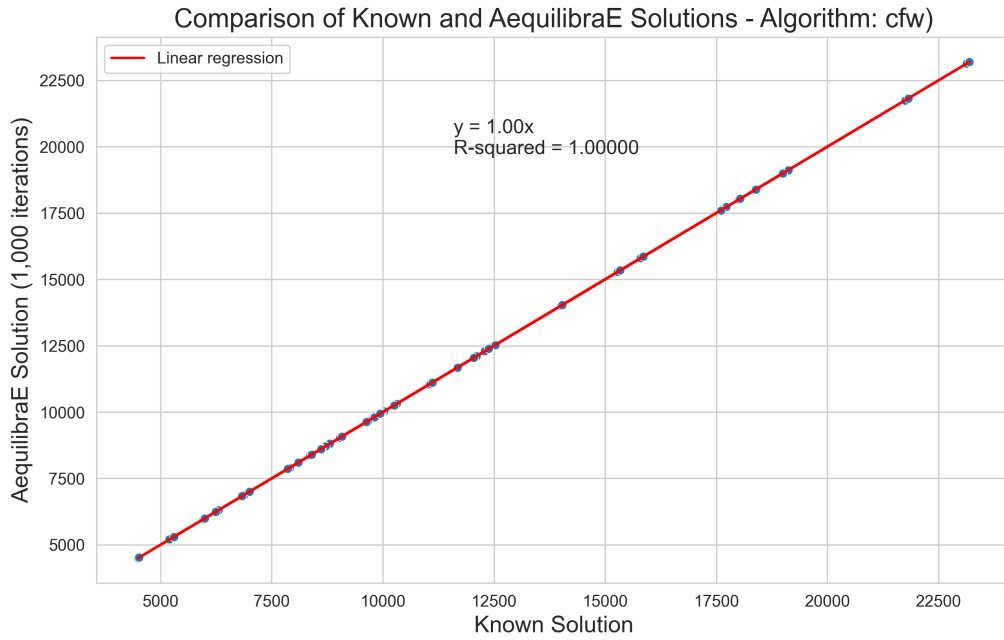

Frank-Wolfe

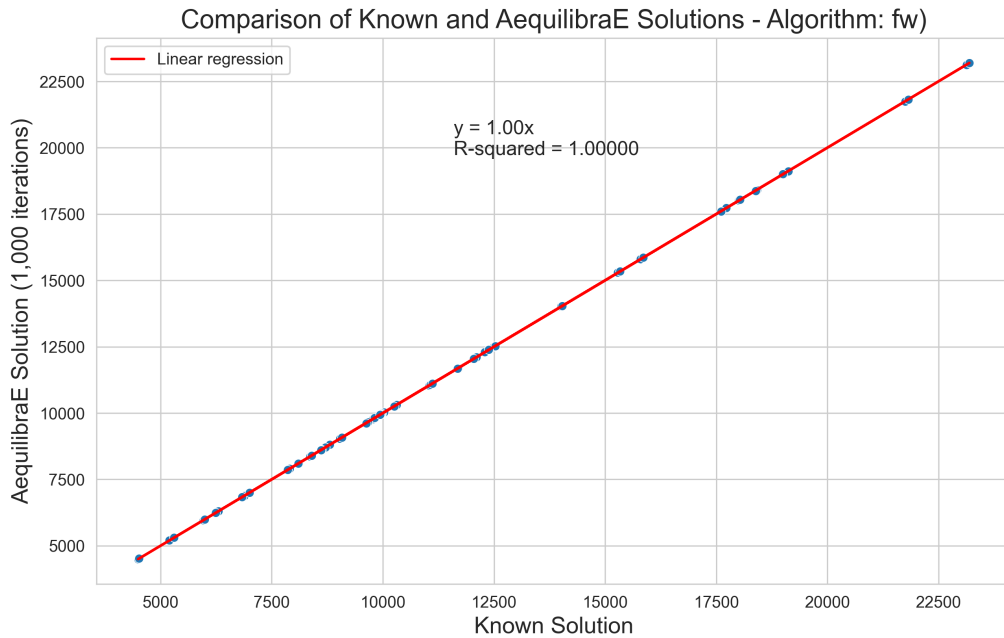


MSA

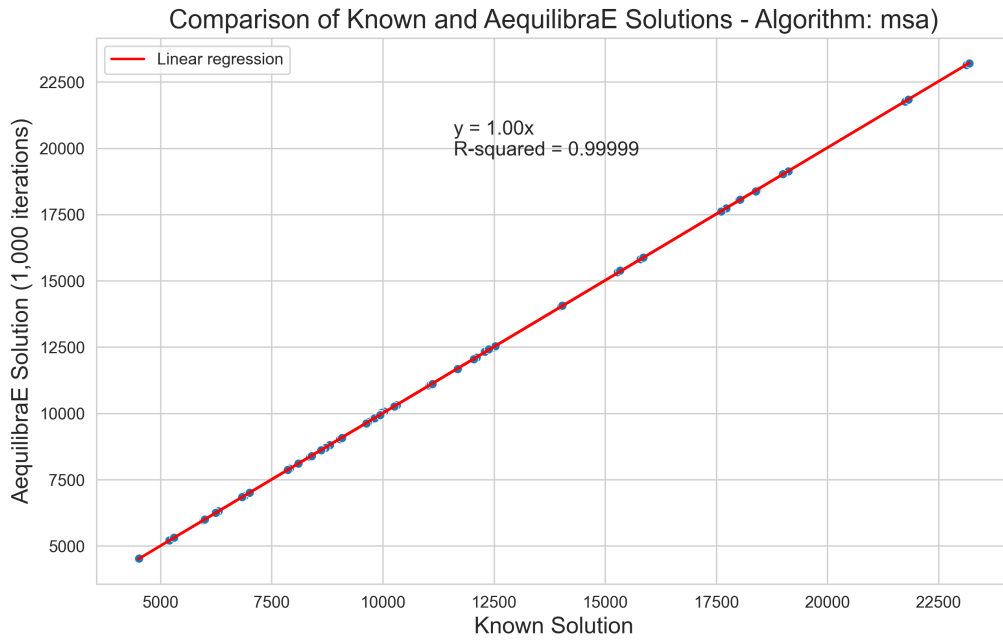


### 7.3.1 Convergence Study

Besides validating the final results from the algorithms, we have also compared how well they converge for the largest instance we have tested (Chicago Regional), as that instance has a comparable size to real-world models.


Chicago

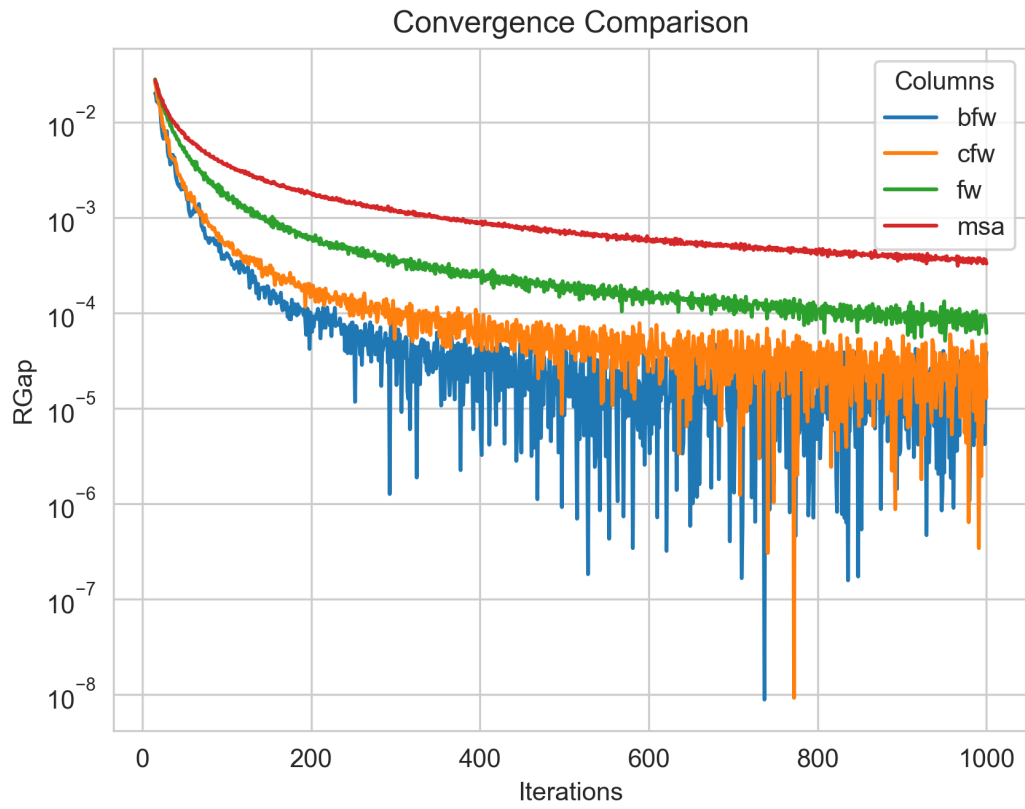


Barcelona

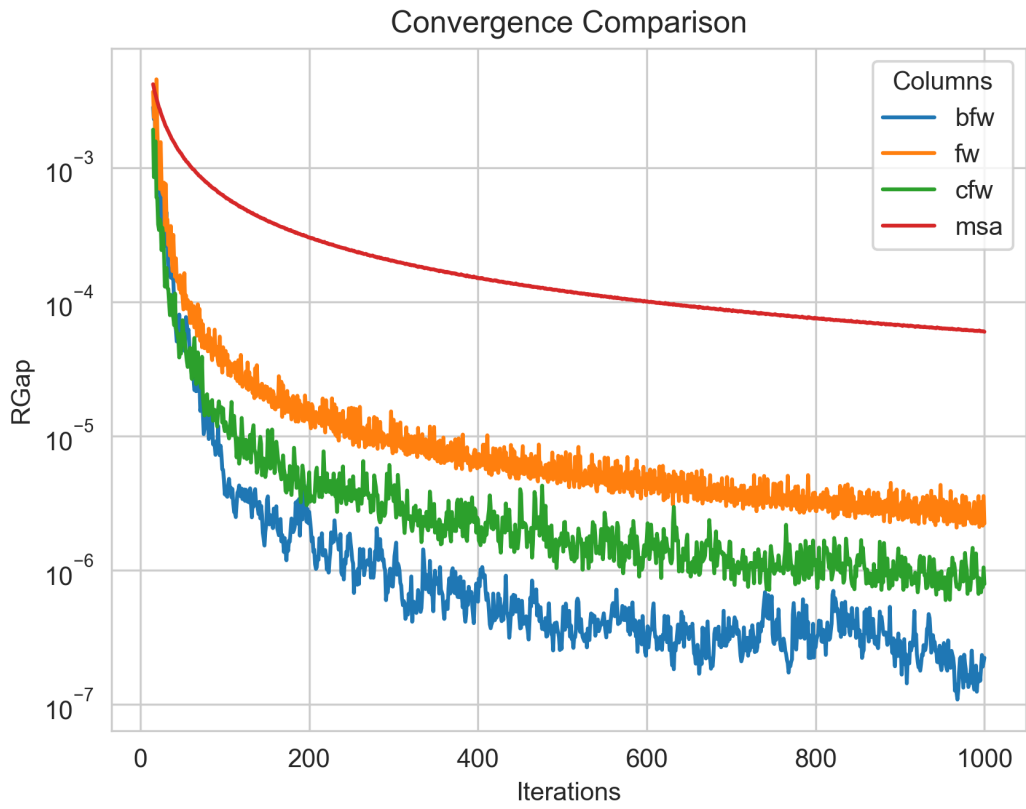


Winnipeg

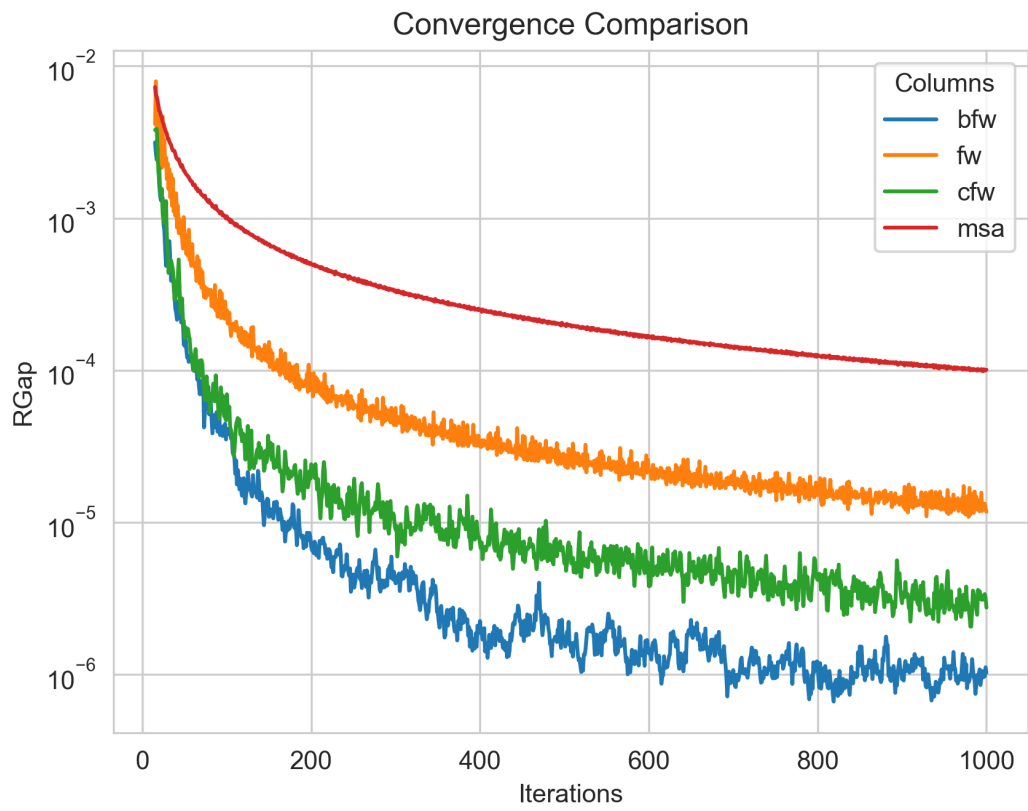

Anaheim

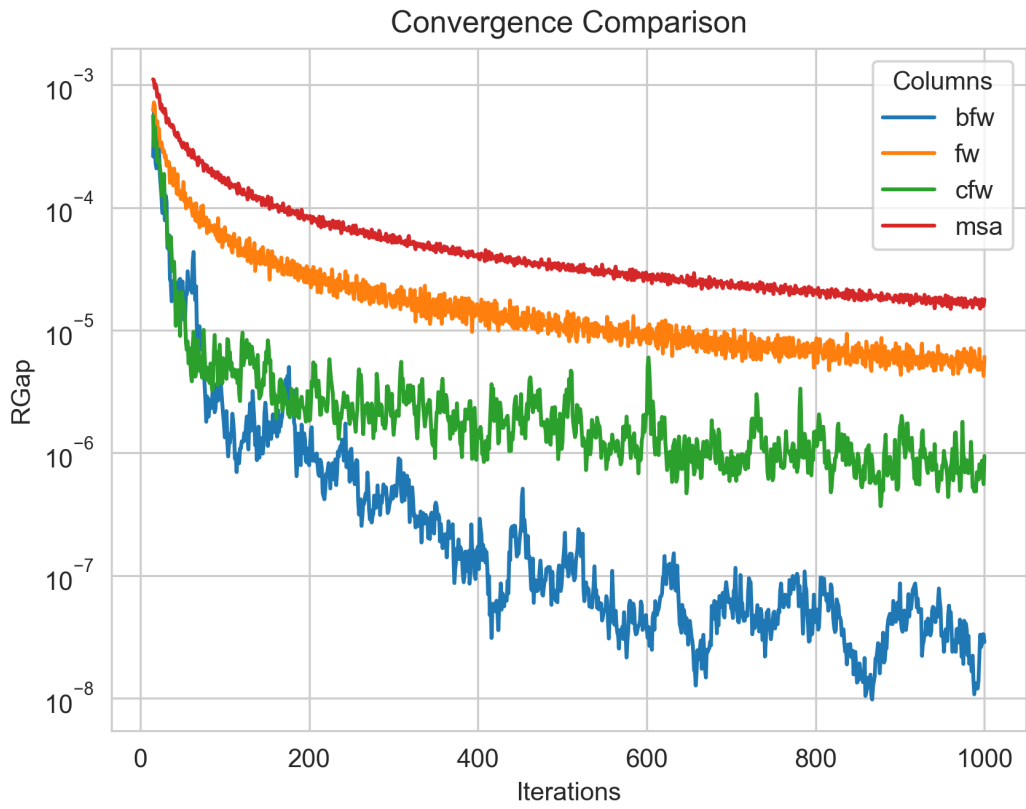

Sioux-Falls

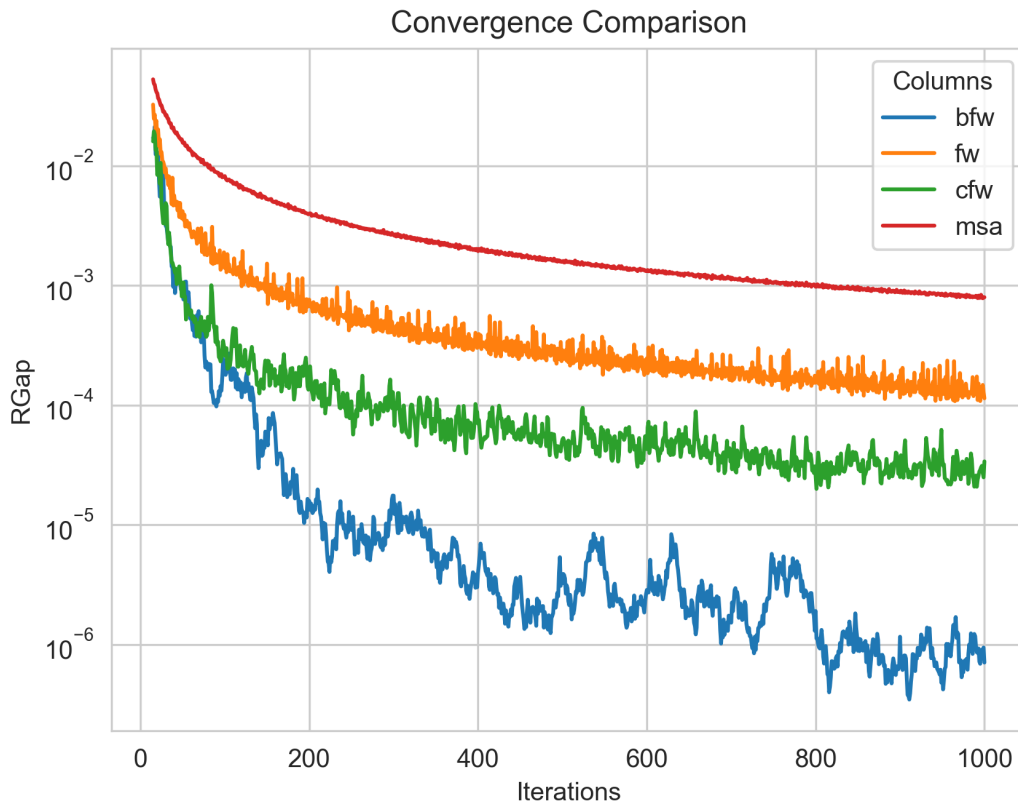

Not surprisingly, one can see that Frank-Wolfe far outperforms the Method of Successive Averages for a number of iterations larger than 25 in the case of Chicago, and is capable of reaching  $1.0e-04$  just after 800 iterations, while MSA is still at  $3.5e-4$  even after 1,000 iterations for that same case.

The actual show, however, is left for the biconjugate Frank-Wolfe implementation, which delivers a relative gap of under  $1.0e-04$  in under 200 iterations, and a relative gap of under  $1.0e-05$  in just over 700 iterations.

This convergence capability, allied to its computational performance described below suggest that AequilibraE is ready to be used in large real-world applications.

### 7.3.2 Computational performance

All tests were run on a workstation equipped AMD Threadripper 3970X with 32 cores (64 threads) @ 3.7 GHz (memory use is trivial for these instances).

On this machine, AequilibraE performed 1,000 iterations of biconjugate Frank-Wolfe assignment on the Chicago Network in a little over 4 minutes, or a little less than 0.43s per iteration.

Compared with AequilibraE previous versions, we can notice a reasonable decrease in processing time.

#### Note

The biggest opportunity for performance in AequilibraE right now it to apply network contraction hierarchies to the building of the graph, but that is still a long-term goal

### 7.3.3 Want to run your own convergence study?

If you want to run the convergence study in your machine, with Chicago Regional instance or any other instance presented here, check out the code block below! Please make sure you have already imported [TNTP files](#) into your machine.

In the first part of the code, we'll parse TNTP instances to a format AequilibraE can understand, and then we'll perform the assignment.

```
# Imports
from pathlib import Path
from time import perf_counter

import matplotlib.pyplot as plt
import numpy as np
import pandas as pd
import seaborn as sns
from sklearn.linear_model import LinearRegression
from sklearn.metrics import r2_score

from aequilibrae.matrix import AequilibraeMatrix
from aequilibrae.paths import Graph
from aequilibrae.paths import TrafficAssignment
from aequilibrae.paths.traffic_class import TrafficClass

# Helper functions
def build_matrix(folder: Path, model_stub: str) -> AequilibraeMatrix:
    omx_name = folder / f"{model_stub}_trips.omx"
    if omx_name.exists():
        mat = AequilibraeMatrix()
        mat.load(omx_name)
        mat.computational_view()
        return mat

    matfile = str(folder / f"{model_stub}_trips.tntp")
    # Creating the matrix
    f = open(matfile, 'r')
    all_rows = f.read()
    blocks = all_rows.split('Origin')[1:]
    matrix = {}
    for k in range(len(blocks)):
        orig = blocks[k].split('\n')
        dests = orig[1:]
        orig = int(orig[0])

        d = [eval('{'+ a.replace(';',' ').replace(' ','') + '}') for a in dests]
        destinations = {}
        for i in d:
            destinations = {**destinations, **i}
        matrix[orig] = destinations
    zones = max(matrix.keys())
    index = np.arange(zones) + 1
    mat_data = np.zeros((zones, zones))
    for i in range(zones):
        for j in range(zones):
```

(continues on next page)

(continued from previous page)

```

        mat_data[i, j] = matrix[i + 1].get(j + 1, 0)

    # Let's save our matrix in AequilibraE Matrix format
    mat = AequilibraeMatrix()
    mat.create_empty(zones=zones, matrix_names=['matrix'], memory_only=True)
    mat.matrix['matrix'][:, :] = mat_data[:, :]
    mat.index[:] = index[:]
    mat.computational_view(["matrix"])
    mat.export(str(omx_name))
    return mat

# Now let's parse the network
def build_graph(folder: Path, model_stub: str, centroids: np.array) -> Graph:
    net = pd.read_csv(folder / f"{model_stub}_net.tntp", skiprows=7, sep='\t')
    cols = ['init_node', 'term_node', 'free_flow_time', 'capacity', "b", "power"]
    if 'toll' in net.columns:
        cols.append('toll')
    network = net[cols]
    network.columns = ['a_node', 'b_node', 'free_flow_time', 'capacity', "b", "power",
    ↪ "toll"]
    network = network.assign(direction=1)
    network["link_id"] = network.index + 1
    network.free_flow_time = network.free_flow_time.astype(np.float64)

    # If you want to create an AequilibraE matrix for computation, then it follows
    g = Graph()
    g.cost = net['free_flow_time'].values
    g.capacity = net['capacity'].values
    g.free_flow_time = net['free_flow_time'].values

    g.network = network
    g.network.loc[(g.network.power < 1), "power"] = 1
    g.network.loc[(g.network.free_flow_time == 0), "free_flow_time"] = 0.01
    g.prepare_graph(centroids)
    g.set_graph("free_flow_time")
    g.set_skimming(["free_flow_time"])
    g.set_blocked_centroid_flows(False)
    return g

def known_results(folder: Path, model_stub: str) -> pd.DataFrame:
    df = pd.read_csv(folder / f"{model_stub}_flow.tntp", sep='\t')
    df.columns = ["a_node", "b_node", "Tntp Solution", "cost"]
    return df

# Let's run the assignment
def assign(g: Graph, mat: AequilibraeMatrix, algorithm: str):
    assignclass = TrafficClass("car", g, mat)
    if "toll" in g.network.columns:
        assignclass.set_fixed_cost("toll")

    assign = TrafficAssignment()
    assign.set_classes([assignclass])

```

(continues on next page)

```

assig.set_vdf("BPR")
assig.set_vdf_parameters({"alpha": "b", "beta": "power"})
assig.set_capacity_field("capacity")
assig.set_time_field("free_flow_time")
assig.max_iter = 1000
assig.rgap_target = 1e-10 # Nearly guarantees that convergence won't be reached
assig.set_algorithm(algorithm)
assig.execute()
return assig

# We compare the results
def validate(assig: TrafficAssignment, known_flows: pd.DataFrame, algorithm: str,
↳ folder: Path, model_name):
    modeled = g.network[["link_id", "a_node", "b_node"]].merge(assig.results().matrix_
↳ ab.reset_index(),
                                                                    on="link_id").rename(
        columns={"matrix_ab": "AequilibraE Solution"})
    merged = known_flows.merge(modeled, on=["a_node", "b_node"])

    # Scatter plot
    plt.figure(figsize=(10, 6))
    sns.scatterplot(data=merged, x="TNTP Solution", y="AequilibraE Solution", s=30)

    # Linear regression
    X = merged["TNTP Solution"].values.reshape(-1, 1)
    y = merged["AequilibraE Solution"].values
    reg = LinearRegression(fit_intercept=False).fit(X, y)
    y_pred = reg.predict(X)
    r_squared = r2_score(y, y_pred)

    # Plot regression line
    plt.plot(merged["TNTP Solution"], y_pred, color='red', label='Linear regression')

    # Customize the plot
    plt.title(f'Comparison of Known and AequilibraE Solutions - Algorithm: {algorithm}
↳ ', fontsize=16)
    plt.xlabel('Known Solution', fontsize=14)
    plt.ylabel('AequilibraE Solution (1,000 iterations)', fontsize=14)

    # Display the equation and R-squared on the plot
    equation_text = f'y = {reg.coef_[0]:.2f}x\nR-squared = {r_squared:.5f}'
    plt.text(x=merged["TNTP Solution"].max() * 0.5, y=merged["AequilibraE Solution"].
↳ max() * 0.85, s=equation_text,
            fontsize=12)

    plt.legend()
    plt.savefig(folder / f"{model_name}_{algorithm}-1000_iter.png", dpi=300)
    plt.close()

def assign_and_validate(g: Graph, mat: AequilibraeMatrix, folder: Path, model_stub:
↳ str):
    known_flows = known_results(folder, model_stub)

```

(continues on next page)

(continued from previous page)

```

# We run the traffic assignment
conv = None
for algorithm in ["bfw", "cfw", "fw", "msa"]:
    t = -perf_counter()
    assign = assign(g, mat, algorithm)
    t += perf_counter()
    print(f"{model_stub}, {algorithm}, {t:0.4f}")

    res = assign.report()[["iteration", "rgap"]].rename(columns={"rgap": algorithm})
    ↪

    validate(assign, known_flows, algorithm, folder, model_stub)

    conv = res if conv is None else conv.merge(res, on="iteration")
df = conv.replace(np.inf, 1).set_index("iteration")
convergence_chart(df, data_folder, model_stub)
df.to_csv(folder / f"{model_stub}_convergence.csv")

def convergence_chart(df: pd.DataFrame, folder: Path, model_name):
    import matplotlib.pyplot as plt

    plt.cla()
    df = df.loc[15:, :]
    for column in df.columns:
        plt.plot(df.index, df[column], label=column)
    # Customize the plot
    plt.title('Convergence Comparison')
    plt.xlabel('Iterations')
    plt.ylabel('RGap')
    plt.yscale("log")
    plt.legend(title='Columns')
    plt.savefig(folder / f"convergence_comparison_{model_name}.png", dpi=300)

models = {"chicago": [Path(r'D:\src\TransportationNetworks\chicago-regional'),
    ↪"ChicagoRegional"],
    "sioux_falls": [Path(r'D:\src\TransportationNetworks\SiouxFalls'), "SiouxFalls
    ↪"],
    "anaheim": [Path(r'D:\src\TransportationNetworks\Anaheim'), "Anaheim"],
    "winnipeg": [Path(r'D:\src\TransportationNetworks\Winnipeg'), "Winnipeg"],
    "barcelona": [Path(r'D:\src\TransportationNetworks\Barcelona'), "Barcelona"],
    }

convergence = {}
for model_name, (data_folder, model_stub) in models.items():
    print(model_name)
    mat = build_matrix(data_folder, model_stub)
    g = build_graph(data_folder, model_stub, mat.index)
    assign_and_validate(g, mat, data_folder, model_stub)

```

## 7.4 Examples

### 7.4.1 Traffic assignment

#### Assigning sparse matrices

Modern Activity-Based models (and even some trip-based and tour-based ones) result on incredibly sparse demand matrices, which opens up a significant opportunity to save time during assignment by using early-exiting during the path-computation phase of assignment.

To take advantage of this, while still computing assignment skims, AequilibraE has a built-in method to skim the last iteration after the assignment is done.

#### Technical references

- *Traffic Assignment Procedure*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.TrafficClass()`
- `aequilibrae.paths.TrafficAssignment()`

```
# Imports
from os.path import join
from tempfile import gettempdir
from uuid import uuid4

from aequilibrae.utils.create_example import create_example
from aequilibrae.paths import TrafficAssignment, TrafficClass
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
logger = project.logger
```

#### Traffic assignment

We build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with NaNs.
# This is true, but we won't use those fields.

# We grab the graph for cars
graph = project.network.graphs["c"]

# Let's say we want to minimize the free_flow_time
```

(continues on next page)

(continued from previous page)

```
graph.set_graph("free_flow_time")

# And we will allow paths to be computed going through other centroids/centroid_
↳connectors
# required for the Sioux Falls network, as all nodes are centroids
graph.set_blocked_centroid_flows(False)
```

Let's get the demand matrix directly from the project record, and inspect what matrices we have in the project.

```
proj_matrices = project.matrices
proj_matrices.list()
```

We get the demand matrix, and prepare it for computation

```
demand = proj_matrices.get_matrix("demand_omx")
demand.computational_view(["matrix"])
```

Let's perform the traffic assignment

```
# Create the assignment class
assigclass = TrafficClass(name="car", graph=graph, matrix=demand)

assig = TrafficAssignment()

# We start by adding the list of traffic classes to be assigned
assig.add_class(assigclass)

# Then we set these parameters, which can only be configured after adding one class to_
↳the assignment
assig.set_vdf("BPR") # This is not case-sensitive

# Then we set the volume delay function and its parameters
assig.set_vdf_parameters({"alpha": "b", "beta": "power"})

# The capacity and free flow travel times as they exist in the graph
assig.set_capacity_field("capacity")
assig.set_time_field("free_flow_time")

# And the algorithm we want to use to assign
assig.set_algorithm("bfw")

# Let's set parameters that make this example run very fast
assig.max_iter = 10
assig.rgap_target = 0.01

# we then execute the assignment
assig.execute()
```

After finishing the assignment, we can skim the last iteration

```
skims = assig.skim_congested(["distance"], return_matrices=True)

# Skims are returned as a dictionary, with the class names as keys
```

(continues on next page)

(continued from previous page)

```
# Let's see all skims we have inside it:  
print(skims["car"].names)
```

We can save the skims, but we need to choose to only save the final ones, as the blended were not generated

```
assig.save_skims("base_year_assignment_skims", which_ones="final", format="omx")
```

Close the project

```
project.close()
```

### Traffic Assignment without an AequilibraE Model

In this example, we show how to perform Traffic Assignment in AequilibraE without a model.

We are using Sioux Falls data, from TNTP.

#### References

- *Static Traffic Assignment*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.TrafficClass()`
- `aequilibrae.paths.TrafficAssignment()`
- `aequilibrae.matrix.AequilibraeMatrix()`

```
# Imports  
import os  
import pandas as pd  
import numpy as np  
from uuid import uuid4  
from tempfile import gettempdir  
  
from aequilibrae.matrix import AequilibraeMatrix  
from aequilibrae.paths import Graph  
from aequilibrae.paths import TrafficAssignment  
from aequilibrae.paths.traffic_class import TrafficClass
```

We load the example file from the GMNS GitHub repository

```
net_file = "https://raw.githubusercontent.com/bstabler/TransportationNetworks/master/  
↪SiouxFalls/SiouxFalls_net.tntp"  
  
demand_file = "https://raw.githubusercontent.com/bstabler/TransportationNetworks/  
↪master/SiouxFalls/CSV-data/SiouxFalls_od.csv"
```

(continues on next page)

(continued from previous page)

```
geometry_file = "https://raw.githubusercontent.com/bstabler/TransportationNetworks/
↳master/SiouxFalls/SiouxFalls_node.tntp"
```

Let's use a temporary folder to store our data

```
folder = os.path.join(gettempdir(), uuid4().hex)
```

First we load our demand file. This file has three columns: O, D, and Ton. O and D stand for origin and destination, respectively, and Ton is the demand of each OD pair.

```
dem = pd.read_csv(demand_file)
zones = int(max(dem.O.max(), dem.D.max()))
index = np.arange(zones) + 1
```

Since our OD-matrix is in a different shape than we expect (for Sioux Falls, that would be a 24x24 matrix), we must create our matrix.

```
mtx = np.zeros(shape=(zones, zones))
for element in dem.to_records(index=False):
    mtx[element[0]-1][element[1]-1] = element[2]
```

Now let's create an AequilibraE Matrix with our data

```
aemfile = os.path.join(folder, "demand.aem")
aem = AequilibraeMatrix()
kwargs = {'file_name': aemfile,
          'zones': zones,
          'matrix_names': ['matrix']}

aem.create_empty(**kwargs)
aem.matrix['matrix'][:, :] = mtx[:, :]
aem.index[:] = index[:]
```

Let's import information about our network. As we're loading data in Tntp format, we should do these manipulations.

```
net = pd.read_csv(net_file, skiprows=2, sep="\t", lineterminator=";", header=None)

net.columns = ["newline", "a_node", "b_node", "capacity", "length", "free_flow_time",
↳"b", "power", "speed", "toll", "link_type", "terminator"]

net.drop(columns=["newline", "terminator"], index=[76], inplace=True)
```

```
network = net[['a_node', 'b_node', 'capacity', 'free_flow_time', 'b', 'power']]
network = network.assign(direction=1)
network["link_id"] = network.index + 1
network = network.astype({"a_node": "int64", "b_node": "int64"})
```

Now we'll import the geometry (as lon/lat) for our network, this is required if you plan to use the A\* path finding, otherwise it can safely be skipped.

```
geom = pd.read_csv(geometry_file, skiprows=1, sep="\t", lineterminator=";",
↳header=None)
```

(continues on next page)

(continued from previous page)

```
geom.columns = ["newline", "lon", "lat", "terminator"]
geom.drop(columns=["newline", "terminator"], index=[24], inplace=True)
geom["node_id"] = geom.index + 1
geom = geom.astype({"node_id": "int64", "lon": "float64", "lat": "float64"}).set_
    ↪index("node_id")
```

Let's build our Graph! In case you're in doubt about AequilibraE Graph, [click here](#) to read more about it.

```
g = Graph()
g.cost = network['free_flow_time'].values
g.capacity = network['capacity'].values
g.free_flow_time = network['free_flow_time'].values

g.network = network
g.prepare_graph(index)
g.set_graph("free_flow_time")
g.cost = np.array(g.cost, copy=True)
g.set_skimming(["free_flow_time"])
g.set_blocked_centroid_flows(False)
g.network["id"] = g.network.link_id
g.lonlat_index = geom.loc[g.all_nodes]
```

Let's prepare our matrix for computation

```
aem.computational_view(["matrix"])
```

Let's perform our assignment. Feel free to try different algorithms, as well as change the maximum number of iterations and the gap

```
assignclass = TrafficClass("car", g, aem)

assign = TrafficAssignment()

assign.set_classes([assignclass])
assign.set_vdf("BPR")
assign.set_vdf_parameters({"alpha": "b", "beta": "power"})
assign.set_capacity_field("capacity")
assign.set_time_field("free_flow_time")
assign.set_algorithm("fw")
assign.max_iter = 100
assign.rgap_target = 1e-6
assign.execute()
```

Now let's take a look at the Assignment results

```
assign.results()
```

And at the Assignment report

```
assign.report()
```

## Forecasting

In this example, we present a full forecasting workflow for the Sioux Falls example model.

We start creating the skim matrices, running the assignment for the base-year, and then distributing these trips into the network. Later, we estimate a set of future demand vectors which are going to be the input of a future year assignment with select link analysis.

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.TrafficClass()`
- `aequilibrae.paths.TrafficAssignment()`
- `aequilibrae.distribution.Ipf()`
- `aequilibrae.distribution.GravityCalibration()`
- `aequilibrae.distribution.GravityApplication()`
- `aequilibrae.distribution.SyntheticGravityModel()`

```
# Imports
from uuid import uuid4
from os.path import join
from tempfile import gettempdir

import pandas as pd

from aequilibrae.utils.create_example import create_example
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
logger = project.logger
```

## Traffic assignment with skimming

In this step, we'll set the skims for the variable `free_flow_time`, and execute the traffic assignment for the base-year.

```
from aequilibrae.paths import TrafficAssignment, TrafficClass
```

```
# We build all graphs
project.network.build_graphs()
# We get warnings that several fields in the project are filled with NaNs.
# This is true, but we won't use those fields.

# We grab the graph for cars
graph = project.network.graphs["c"]

# Let's say we want to minimize the free_flow_time
```

(continues on next page)

(continued from previous page)

```
graph.set_graph("free_flow_time")

# And will skim time and distance while we are at it
graph.set_skimming(["free_flow_time", "distance"])

# And we will allow paths to be computed going through other centroids/centroid_
↳connectors
# required for the Sioux Falls network, as all nodes are centroids
graph.set_blocked_centroid_flows(False)
```

Let's get the demand matrix directly from the project record, and inspect what matrices we have in the project.

```
proj_matrices = project.matrices
proj_matrices.list()
```

We get the demand matrix, and prepare it for computation

```
demand = proj_matrices.get_matrix("demand_omx")
demand.computational_view(["matrix"])
```

Let's perform the traffic assignment

```
# Create the assignment class
assigclass = TrafficClass(name="car", graph=graph, matrix=demand)

assig = TrafficAssignment()

# We start by adding the list of traffic classes to be assigned
assig.add_class(assigclass)

# Then we set these parameters, which can only be configured after adding one class to_
↳the assignment
assig.set_vdf("BPR") # This is not case-sensitive

# Then we set the volume delay function and its parameters
assig.set_vdf_parameters({"alpha": "b", "beta": "power"})

# The capacity and free flow travel times as they exist in the graph
assig.set_capacity_field("capacity")
assig.set_time_field("free_flow_time")

# And the algorithm we want to use to assign
assig.set_algorithm("bfw")

# Since we haven't checked the parameters file, let's make sure convergence criteria_
↳is good
assig.max_iter = 1000
assig.rgap_target = 0.001

# we then execute the assignment
assig.execute()
```

After finishing the assignment, we can easily see the convergence report.

```
convergence_report = assig.report()
convergence_report.head()
```

And we can also see the results of the assignment

```
results = assig.results()
results.head()
```

We can export our results to CSV or get a Pandas DataFrame, but let's put it directly into the results database

```
assig.save_results("base_year_assignment")
```

And save the skims

```
assig.save_skims("base_year_assignment_skims", which_ones="all", format="omx")
```

## Trip distribution

First, let's have a function to plot the Trip Length Frequency Distribution.

```
from math import log10, floor
import matplotlib.pyplot as plt
```

```
def plot_tlfd(demand, skim, name):
    plt.clf()
    b = floor(log10(skim.shape[0]) * 10)
    n, bins, patches = plt.hist(
        np.nan_to_num(skim.flatten(), 0),
        bins=b,
        weights=np.nan_to_num(demand.flatten()),
        density=False,
        facecolor="g",
        alpha=0.75,
    )

    plt.xlabel("Trip length")
    plt.ylabel("Probability")
    plt.title(f"Trip-length frequency distribution for {name}")
    return plt
```

## Calibration

We will calibrate synthetic gravity models using the skims for `free_flow_time` that we just generated

```
import numpy as np
from aequilibrae.distribution import GravityCalibration
```

We need the demand matrix and to prepare it for computation

```
demand = proj_matrices.get_matrix("demand_aem")
demand.computational_view(["matrix"])
```

We also need the skims we just saved into our project

```
imped = proj_matrices.get_matrix("base_year_assignment_skims_car")

# We can check which matrix cores were created for our skims to decide which one to_
↳use
imped.names
```

Where `free_flow_time_final` is actually the congested time for the last iteration

But before using the data, let's get some impedance for the intrazonals. Let's assume it is 75% of the closest zone.

```
imped_core = "free_flow_time_final"
imped.computational_view([imped_core])

# If we run the code below more than once, we will be overwriting the diagonal values_
↳with non-sensical data
# so let's zero it first
np.fill_diagonal(imped.matrix_view, 0)

# We compute it with a little bit of NumPy magic
intrazonals = np.amin(imped.matrix_view, where=imped.matrix_view > 0, initial=imped.
↳matrix_view.max(), axis=1)
intrazonals *= 0.75

# Then we fill in the impedance matrix
np.fill_diagonal(imped.matrix_view, intrazonals)
```

Since we are working with an OMX file, we cannot overwrite a matrix on disk. So let's give it a new name to save.

```
imped.save(names=["final_time_with_intrazonals"])
```

This also updates these new matrices as those being used for computation

```
imped.view_names
```

Let's calibrate our Gravity Model

```
for function in ["power", "expo"]:
    gc = GravityCalibration(matrix=demand, impedance=imped, function=function, nan_as_
↳zero=True)
    gc.calibrate()
    model = gc.model
    # We save the model
    model.save(join(flldr, f"{function}_model.mod"))

    _ = plot_tlfd(gc.result_matrix.matrix_view, imped.matrix_view, f"{function} model
↳")

    # We can save the result of applying the model as well
    # We can also save the calibration report
    with open(join(flldr, f"{function}_convergence.log"), "w") as otp:
        for r in gc.report:
            otp.write(r + "\n")
```

And let's plot a trip length frequency distribution for the demand itself

```
plt = plot_tlfd(demand.matrix_view, imped.matrix_view, "demand")
plt.show()
```

## Forecast

We create a set of ‘future’ vectors using some random growth factors. We apply the model for inverse power, as the trip frequency length distribution (TFLD) seems to be a better fit for the actual one.

```
from aequilibrae.distribution import Ipf, GravityApplication, SyntheticGravityModel
```

## Compute future vectors

First thing to do is to compute the future vectors from our matrix.

```
origins = np.sum(demand.matrix_view, axis=1)
destinations = np.sum(demand.matrix_view, axis=0)

# Then grow them with some random growth between 0 and 10%, and balance them
orig = origins * (1 + np.random.rand(origins.shape[0]) / 10)
dest = destinations * (1 + np.random.rand(origins.shape[0]) / 10)
dest *= orig.sum() / dest.sum()

vectors = pd.DataFrame({"origins":orig, "destinations":dest}, index=demand.index[:])
```

## IPF for the future vectors

Let’s balance the future vectors. The output of this step is going to be used later in the traffic assignment for future year.

```
args = {
    "matrix": demand,
    "vectors": vectors,
    "column_field": "destinations",
    "row_field": "origins",
    "nan_as_zero": True,
}

ipf = Ipf(**args)
ipf.fit()
```

When saving our vector into the project, we’ll get an output that it was recored

```
ipf.save_to_project(name="demand_ipfd", file_name="demand_ipfd.aem")
ipf.save_to_project(name="demand_ipfd_omx", file_name="demand_ipfd.omx")
```

## Impedance

Let’s get the base-year assignment skim for car we created before and prepare it for computation

```
imped = proj_matrices.get_matrix("base_year_assignment_skims_car")
imped.computational_view(["final_time_with_intrazonals"])
```

If we wanted the main diagonal to not be considered...

```
# np.fill_diagonal(imped.matrix_view, np.nan)
```

Now we apply the Synthetic Gravity model

```
for function in ["power", "expo"]:
    model = SyntheticGravityModel()
    model.load(join(flldr, f"{function}_model.mod"))

    outmatrix = join(proj_matrices.flldr, f"demand_{function}_model.aem")
    args = {
        "impedance": imped,
        "vectors": vectors,
        "row_field": "origins",
        "model": model,
        "column_field": "destinations",
        "nan_as_zero": True,
    }

    gravity = GravityApplication(**args)
    gravity.apply()

    # We get the output matrix and save it to OMX too,
    gravity.save_to_project(name=f"demand_{function}_modeled", file_name=f"demand_
    ↪{function}_modeled.omx")
```

We update the matrices table/records and verify that the new matrices are indeed there

```
proj_matrices.update_database()
proj_matrices.list()
```

### Traffic assignment with Select Link Analysis

We'll perform traffic assignment for the future year.

```
logger.info("\n\n TRAFFIC ASSIGNMENT FOR FUTURE YEAR WITH SELECT LINK ANALYSIS")
```

Let's get our future demand matrix, which corresponds to the IPF result we just saved, and see what is the core we ended up getting. It should be matrix.

```
demand = proj_matrices.get_matrix("demand_ipfd")
demand.names
```

Let's prepare our data for computation

```
demand.computational_view("matrix")
```

The future year assignment is quite similar to the one we did for the base-year.

```
# So, let's create the assignment class
assignclass = TrafficClass(name="car", graph=graph, matrix=demand)

assign = TrafficAssignment()
```

(continues on next page)

(continued from previous page)

```

# Add at a list of traffic classes to be assigned
assig.add_class(assigclass)

assig.set_vdf("BPR")

# Set the volume delay function and its parameters
assig.set_vdf_parameters({"alpha": "b", "beta": "power"})

# Set the capacity and free flow travel times as they exist in the graph
assig.set_capacity_field("capacity")
assig.set_time_field("free_flow_time")

# And the algorithm we want to use to assign
assig.set_algorithm("bfw")

# Once again we haven't checked the parameters file, so let's make sure convergence_
↪criteria is good
assig.max_iter = 500
assig.rgap_target = 0.00001

```

Now we select two sets of links to execute select link analysis.

```

select_links = {
    "Leaving node 1": [(1, 1), (2, 1)],
    "Random nodes": [(3, 1), (5, 1)],
}

```

### Note

As we are executing the select link analysis on a particular `TrafficClass`, we should set the links we want to analyze. The input is a dictionary with string as keys and a list of tuples as values, so that each entry represents a separate set of selected links to compute.

```
select_link_dict = {"set_name": [(link_id1, direction1), ..., (link_id, direction)]}
```

The string name will name the set of links, and the list of tuples is the list of selected links in the form `(link_id, direction)`, as it occurs in the *Graph*.

Direction can be one of 0, 1, or -1, where 0 denotes bi-directionality.

```

# We call this command on the class we are analyzing with our dictionary of values
assigclass.set_select_links(select_links)

# we then execute the assignment
assig.execute()

```

To save our select link results, all we need to do is provide it with a name. In addition to exporting the select link flows, it also exports the Select Link matrices in OMX format.

```
assig.save_select_link_results("select_link_analysis")
```

### Note

Say we just want to save our select link flows, we can call: `assig.save_select_link_flows("just_flows")`

Or if we just want the select link matrices: `assig.save_select_link_matrices("just_matrices")`

Internally, the `save_select_link_results` calls both of these methods at once.

We can export the results to CSV or AequilibraE Data, but let's put it directly into the results database

```
assig.save_results("future_year_assignment")
```

And save the skims

```
assig.save_skims("future_year_assignment_skims", which_ones="all", format="omx")
```

### Run convergence study

```
df = assig.report()
x = df.iteration.values
y = df.rgap.values

fig = plt.figure()
ax = fig.add_subplot(111)

plt.plot(x, y, "k--")
plt.yscale("log")
plt.grid(True, which="both")
plt.xlabel("Iterations")
plt.ylabel("Relative Gap")
plt.show()
```

Close the project

```
project.close()
```

## PUBLIC TRANSPORT

Public transport data is a key element of transport planning in general<sup>1</sup>. AequilibraE is capable of importing a General Transit Feed Specification (GTFS) to its public transport database. The GTFS is a standardized data format widely used in public transport planning and operation, and was first proposed during the 2000s<sup>2</sup>, for public transit agencies to describe details from their services, such as schedules, stops, fares, etc<sup>2</sup>. Currently, there are two types of GTFS data:

- GTFS schedule, which contains information on routes, schedules, fares, and other details;
- GTFS realtime, which contains real-time vehicle position, trip updates, and service alerts.

The GTFS protocol is being constantly updated and so are AequilibraE's capabilities of handling these changes. We strongly encourage you to take a look at the documentation provided by [Mobility Data](#).

In this section we also present the transit assignment models, which are mathematical tools that predict how passengers behave and travel in a transit network, given some assumptions and inputs.

Transit assignment models aim to answer questions such as:

- How do transit passengers choose their routes in a complex network of lines and services?
- How can we estimate the distribution of passenger flows and the performance of transit systems?

### See also

- [Public Transport Database](#)  
Database structure

## 8.1 Transit assignment graph

In this section, we describe a graph structure for a transit network used for static, link-based, frequency-based assignment. Our focus is the classic algorithm *optimal strategies* by Spiess and Florian (1989)<sup>1</sup>.

Let's start by giving a few definitions:

- **transit**: according to [Wikipedia](#), it is a “*system of transport for passengers by group travel systems available for use by the general public unlike private transport, typically managed on a schedule, operated on established routes, and that charge a posted fee for each trip.*”
- **transit network**: a set of transit lines and stops, where passengers can board, alight or change vehicles.

---

<sup>1</sup> Pereira, R.H.M. and Herszenhut, D. (2023) Introduction to urban accessibility: a practical guide with R. Rio de Janeiro, IPEA. Available at: [https://repositorio.ipea.gov.br/bitstream/11058/12689/52/Introduction\\_urban\\_accessibility\\_Book.pdf](https://repositorio.ipea.gov.br/bitstream/11058/12689/52/Introduction_urban_accessibility_Book.pdf)

<sup>2</sup> Mobility Data (2024) GTFS: Making Public Transit Data Universally Accessible. Available at: <https://gtfs.org/getting-started/what-is-GTFS/>


<sup>1</sup> Spiess, H. and Florian, M. (1989) “Optimal strategies: A new assignment model for transit networks”. *Transportation Research Part B: Methodological*, 23(2), 83-102. Available in: [https://doi.org/10.1016/0191-2615\(89\)90034-9](https://doi.org/10.1016/0191-2615(89)90034-9)

- **assignment:** distribution of the passengers (demand) on the network (supply), knowing that transit users attempt to minimize total travel time, time or distance walking, time waiting, number of transfers, fares, etc...
- **static assignment:** assignment without time evolution. Dynamic properties of the flows, such as congestion, are not well described, unlike with dynamic assignment models.
- **schedule-based approach:** in this approach, distinct vehicle trips are represented by distinct links. We can see the associated network as a time-expanded network, where the third dimension would be time.
- **frequency-based (or headway-based) approach:** unlike with the schedule-based approach, the schedules are averaged in order to get line frequencies.
- **link-based approach:** in this approach, the assignment algorithm is not evaluating paths, or any aggregated information besides attributes stored by nodes and links. In the present case, each link has an associated cost (travel-time,  $s$ ) and frequency ( $f = 1/s$ ).


### 8.1.1 Elements of a transit network

These are the elements required to describe an assignment graph.


- **Transit stops and stations:** transit stops are points where passenger can board, alight or change vehicles. Also, they can be part of larger stations. In the illustration below, two distinct stops ('A' and 'B') are highlighted, and they are both affiliated with the same station (depicted in red).

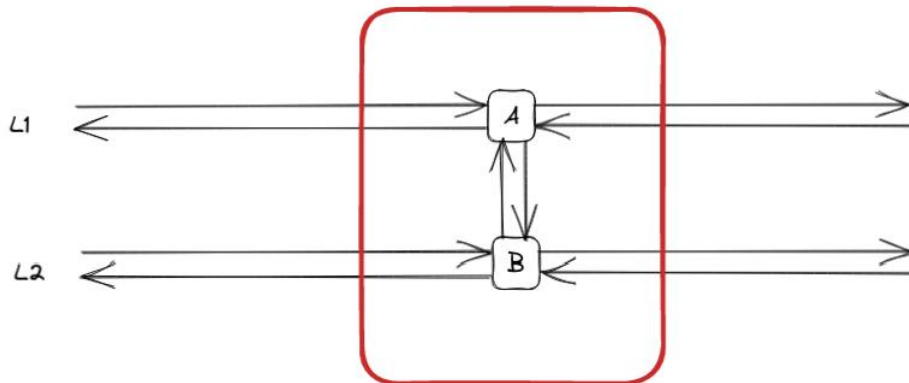

- **Transit lines:** a transit line is a set of services that may use different routes, decomposed into segments.
- **Transit routes:** a route is described by a sequence of stop nodes. We assume here the routes to be directed. For example, we can take a simple case with 3 stops. In this case, the 'L1' line is made of two different routes: 'ABC' and 'CBA'.



A route can present various configurations, such as a partial route at a given moment of the day ('AB'), a route with an additional stop ('ABDC'), a route that does not stop at a given stop ('AC').

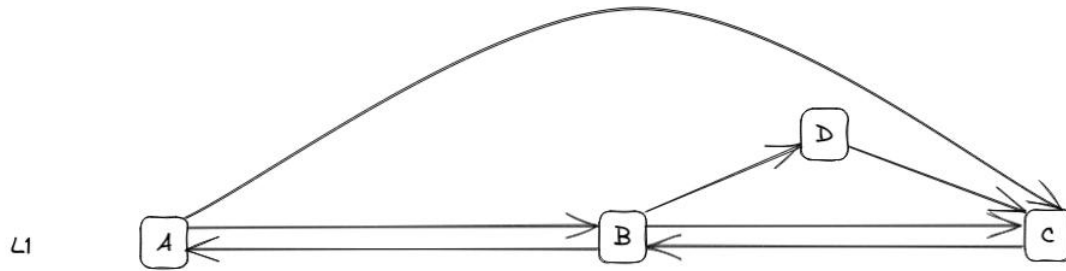

Lines can also be decomposed into multiple sub-lines, each representing distinct routes. For the given example, we may have several sub-lines under the same commercial line (L1).

Line ID	Commercial Name	Stop Sequence	Headway (s)
L1_a1	L1	ABC	600
L1_a2	L1	ABDC	3,600
L1_a3	L1	AB	3,600
L1_a4	L1	AC	3,600
L1_b1	L1	CBA	600


Associated with each sub-line, the headway corresponds to the mean time range between consecutive vehicles — the inverse of the line frequency used as a link attribute in the assignment algorithm.

- **Line segments:** a line segment represents a portion of a transit line between two consecutive stops. Using the example line 'L1\_a1', we derive two distinct line segments:


Line ID	Segment Index	Origin Stop	Destination Stop	Travel Time
L1_a1	1	A	B	300
L1_a1	2	B	C	600

Note that a travel time is included for each line segment, serving as another link attribute used by the assignment algorithm.

- **Transit Assignment Zones:** transit assignment zones correspond to the partition of the network area. The illustration below presents 4 non-overlapping zones, whose demand is expressed as a number of trips from each zone to every other zone, forming a 4 x 4 Origin-Destination (OD) matrix.

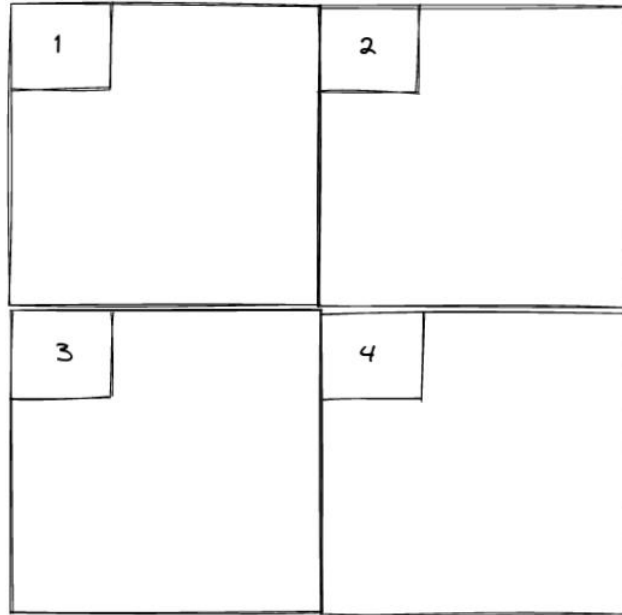

- **Connectors:** connectors are special network nodes that facilitate the connection between supply and demand.

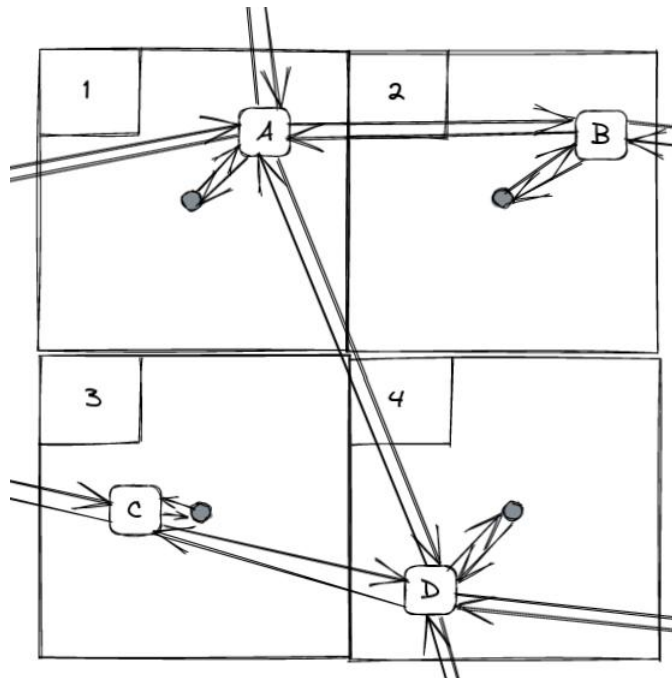


### 8.1.2 The assignment graph


The transit network is used to generate a graph with specific nodes and links used to model the transit process. Various link types and node categories play crucial roles in this representation.

Link types	Node types
On-board	Stop
Boarding	Boarding
Alighting	Alighting
Dwell	OD
Transfer	Walking
Connector	
Walking	


To illustrate, consider the anatomy of a simple stop (figure below). Waiting links encompass boarding and transfer links. Each line segment is associated with a boarding, an on-board and an alighting link.

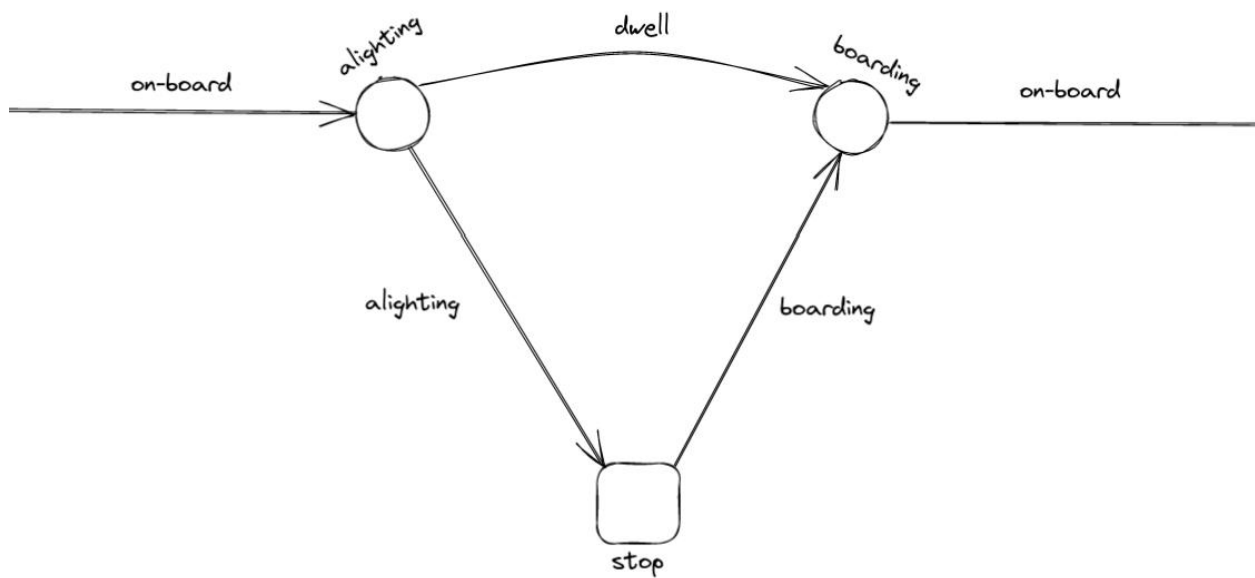

Transfer links enable to compute the passenger flow count between line couples at the same stop. These links can be extended between all lines of a station if an increase in the number of links is viable.

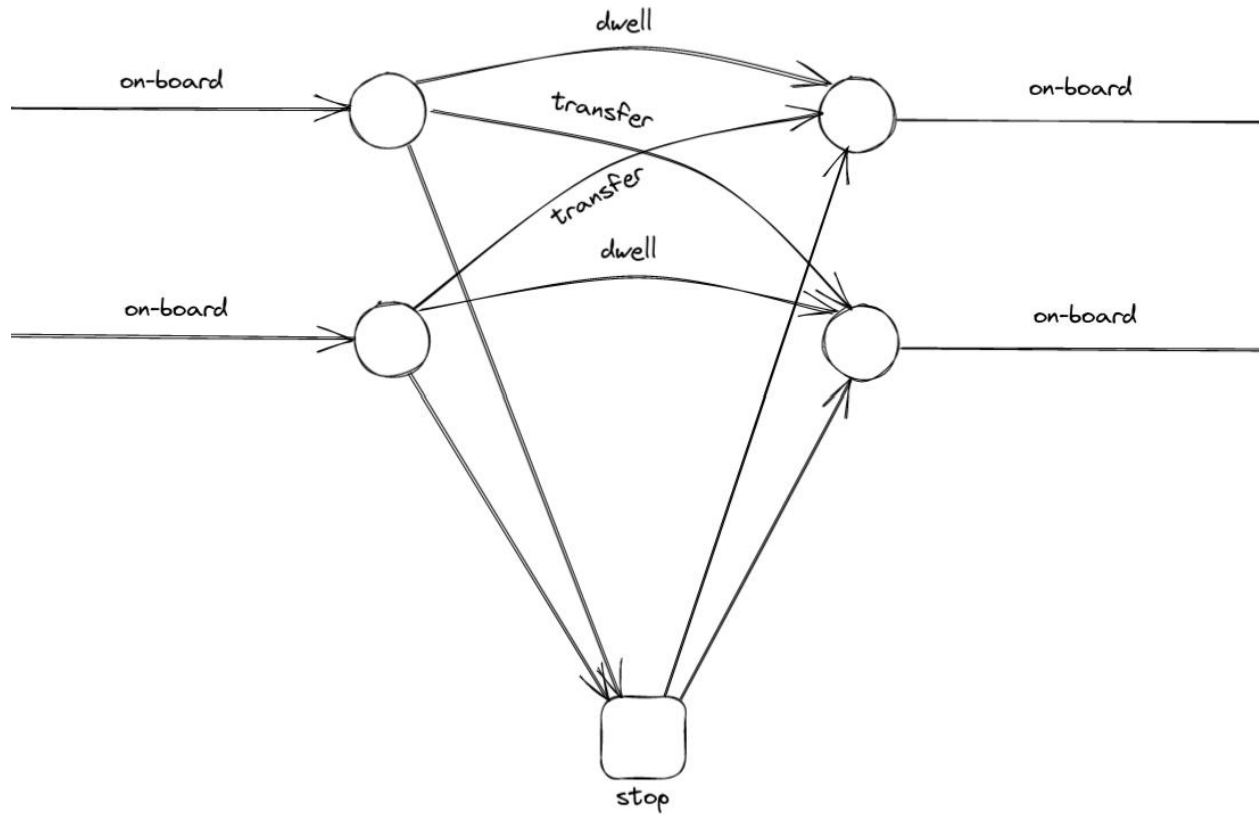

Walking links connect *stop* nodes within a station, while *connector* links connect the zone centroids (OD nodes) to *stop* nodes. Connectors that connect OD to *stop* nodes allow passengers to access the network, while connectors in the opposite direction allow them to egress. Walking nodes/links may also be used to connect stops from distant stations.

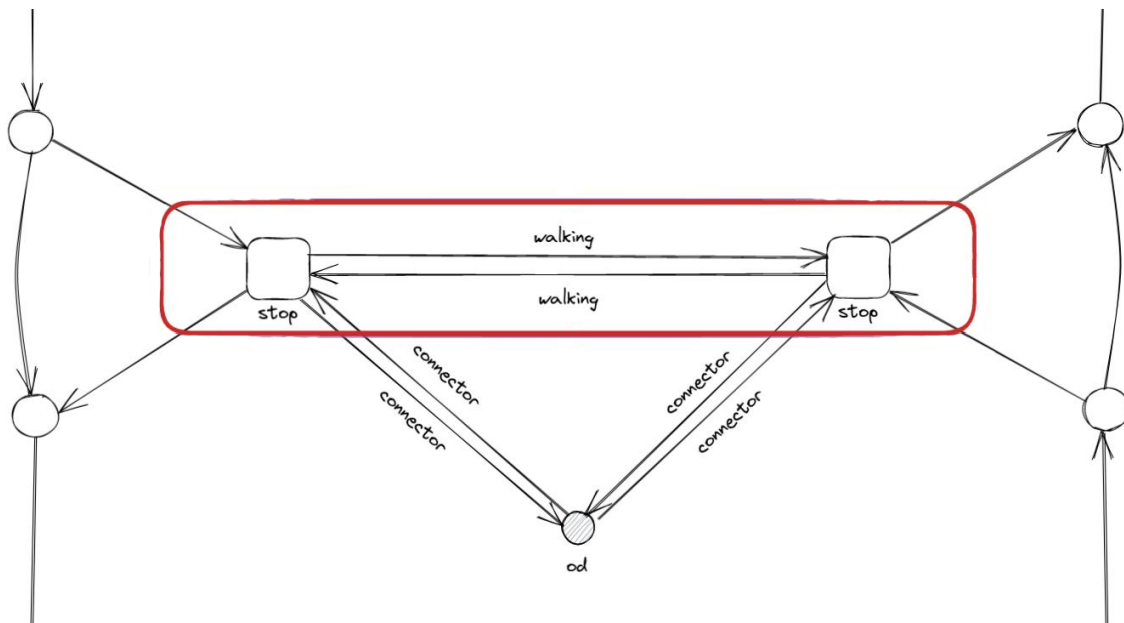

The table below summarizes link characteristics and attributes based on link types:

Link Type	From node type	To node type	Cost	Frequency
on-board	boarding	alighting	travel time	$\infty$
boarding	stop	boarding	constant	line frequency
alighting	alighting	stop	constant	$\infty$
dwell	alighting	boarding	constant	$\infty$
transfer	alighting	boarding	constant + travel time	destination line frequency
connector	OD or stop	OD or stop	travel time	$\infty$
walking	stop or walking	stop or walking	travel time	$\infty$

The travel time is specific to each line segment or walking time. For example, there can be 10 minutes connection between stops in a large transit station. Constant boarding and alighting times are applied uniformly across the network, and dwell links have constant cost equal to the sum of the alighting and boarding constants.


Additional attributes can be introduced for specific link types, such as:

- `line_id`: for on-board, boarding, alighting and dwell links.
- `line_seg_idx`: the line segment index for boarding, on-board and alighting links.
- `stop_id`: for alighting, dwell and boarding links. This can also apply to transfer links for inner stop transfers.
- `o_line_id`: origin line ID for transfer links.
- `d_line_id`: destination line ID for transfer links.

### Assignment graph example - Based on Spiess and Florian (1989)

This illustrative example is taken from Spiess and Florian (1989)<sup>Page 161, 1</sup>.


The following figure presents the travel times for each line.

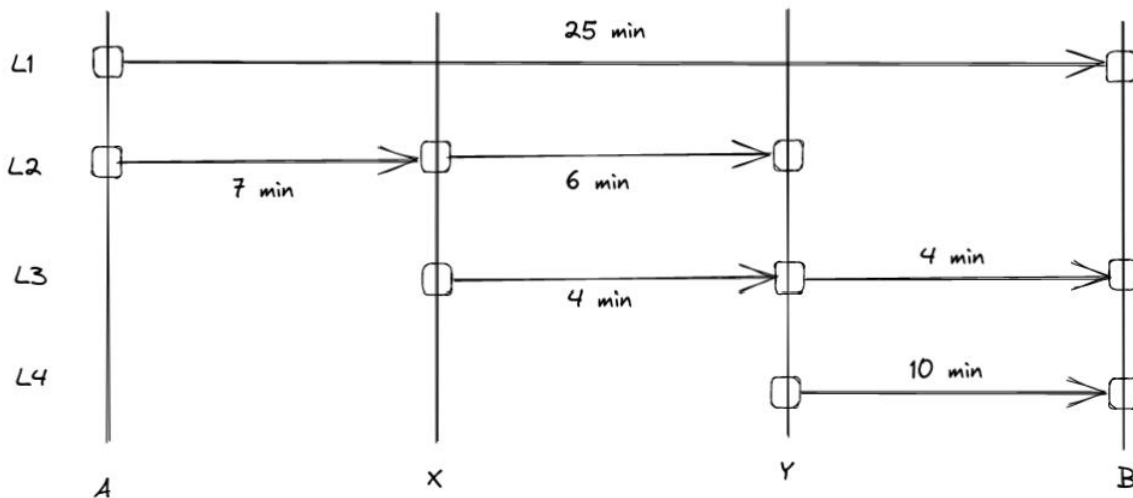

We have the following four distinct line characteristics:

Line ID	Route	Headway (min)	Frequency (1/s)
L1	AB	12	0.001388889
L2	AXY	12	0.001388889
L3	XYB	30	0.000555556
L4	YB	6	0.002777778

Passengers aim to travel from A to B, prompting the division of the network area into two distinct zones: TAZ 1 and TAZ 2. The assignment graph associated with this network encompasses 26 links:

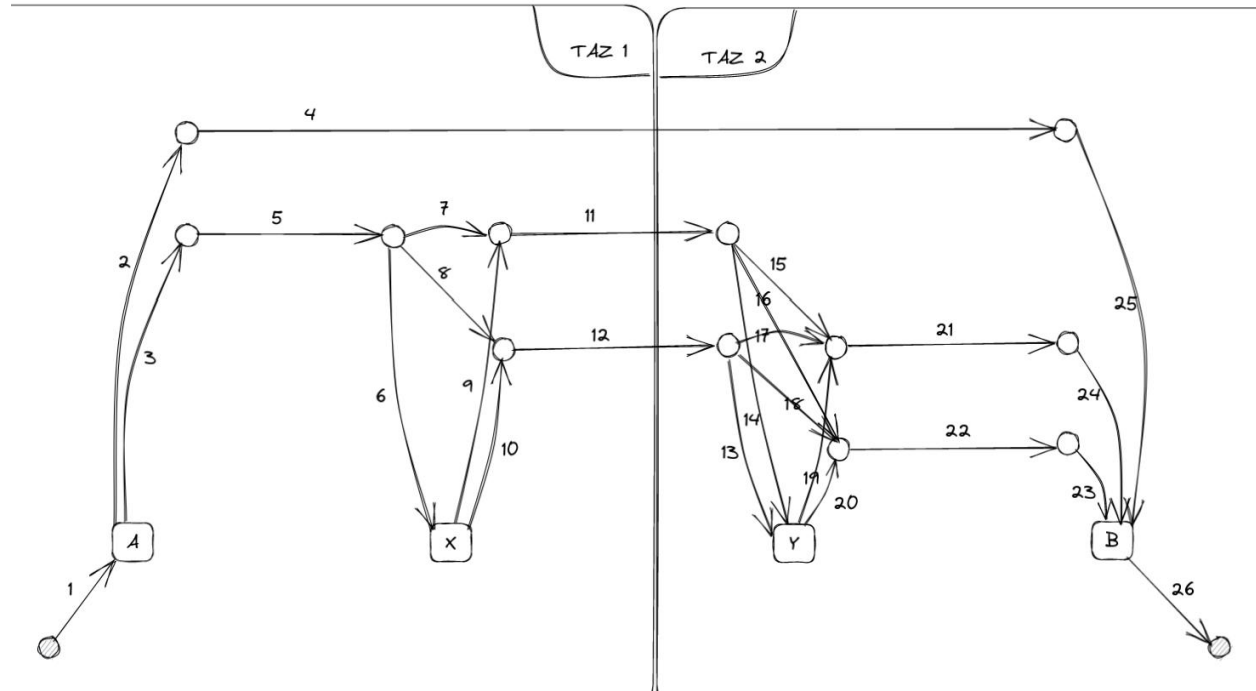

Here is a table listing all links:

Link ID	Link Type	Line ID	Cost	Frequency
1	connector		0	$\infty$
2	boarding	L1	0	0.001388889
3	boarding	L2	0	0.001388889
4	on-board	L1	1500	$\infty$
5	on-board	L2	420	$\infty$
6	alighting	L2	0	$\infty$
7	dwell	L2	0	$\infty$
8	transfer		0	0.000555556
9	boarding	L2	0	0.001388889
10	boarding	L3	0	0.000555556
11	on-board	L2	360	$\infty$
12	on-board	L3	240	$\infty$
13	alighting	L3	0	$\infty$
14	alighting	L2	0	$\infty$
15	transfer	L3	0	0.000555556
16	transfer		0	0.002777778
17	dwell	L3	0	$\infty$
18	transfer		0	0.002777778
19	boarding	L3	0	0.000555556
20	boarding	L4	0	0.002777778
21	on-board	L3	240	$\infty$
22	on-board	L4	600	$\infty$
23	alighting	L4	0	$\infty$
24	alighting	L3	0	$\infty$
25	alighting	L1	0	$\infty$
26	connector		0	$\infty$

### 8.1.3 Transit graph specificities in AequilibraE

The graph creation process in AequilibraE incorporates several edge types to capture the nuances of transit networks. Notable distinctions include:

- Connectors
  - access connectors: directed from od nodes to the network
  - egress connectors: directed from the network to the od nodes
- Transfer edges
  - inner transfer: connect lines within the same stop
  - outer transfer: connect lines between distinct stops within the same station
- Origin and destination nodes
  - origin nodes: represent the starting point of passenger trips
  - destination nodes: represent the end point of passenger trips

Users can customize these features using boolean parameters:

- `with_walking_edges`: create walking edges between the stops of a station
- `with_inner_stop_transfers`: create transfer edges between lines of a stop
- `with_outer_stop_transfers`: create transfer edges between lines of different stops of a station

- `blocking_centroid_flow`: duplicate OD nodes into unconnected origin and destination nodes in order to block centroid flows. Flows starts from an origin node and ends at a destination node. It is not possible to use an egress connector followed by an access connector in the middle of a trip.

Note that during the assignment, if passengers have the choice between a transfer edge or a walking edge for a line change, they will always be assigned to the transfer edge. This leads to these possible edge types:

- on-board
- boarding
- alighting
- dwell
- access\_connector
- egress\_connector
- inner\_transfer
- outer\_transfer
- walking

### 8.1.4 References

## 8.2 Hyperpath routing

Hyperpath routing is one of the basic concepts in transit assignment models, and it is a way of representing the set of optimal routes that a passenger can take from an origin to a destination, based on some criterion such as travel time or generalized cost. A hyperpath is a collection of links that form a subgraph of the transit network. Each link in the hyperpath also has a probability of being used by the passenger, which reflects the attractiveness and uncertainty of the route choice. The shortest hyperpath is optimal regarding the combination of paths weighted by the probability of being used.

Hyperpath routing can be applied to different types of transit assignment models, but here we will focus on frequency-based models. Frequency-based models assume that passengers do not have reliable information about the service schedules and arrival times, and they choose their routes based on the expected travel time or cost. This type of model is suitable for transit systems with rather frequent services.

To illustrate how hyperpath routing works in frequency-based models, we will use the algorithm by Spiess and Florian<sup>1</sup> implemented in AequilibraE.

For example purposes, we will use a simple grid network as an Python example to demonstrate how a hyperpath depends on link frequency for a given origin-destination pair. Note that it can be extended to other contexts such as risk-averse vehicle navigation<sup>2</sup>.

### 8.2.1 Bell's network

We start by defining the directed graph  $\mathcal{G} = (V, E)$ , where  $V$  and  $E$  are the graph vertices and edges. The hyperpath generating algorithm requires 2 attributes for each edge  $a \in V$ :

- edge travel time:  $u_a \geq 0$
- edge frequency:  $f_a \geq 0$

---

<sup>1</sup> Spiess, H. and Florian, M. (1989) "Optimal strategies: A new assignment model for transit networks". *Transportation Research Part B: Methodological*, 23(2), 83-102. Available in: [https://doi.org/10.1016/0191-2615\(89\)90034-9](https://doi.org/10.1016/0191-2615(89)90034-9)

<sup>2</sup> Ma, J., Fukuda, D. and Schmöcker, J.D. (2012) "Faster hyperpath generating algorithms for vehicle navigation", *Transportmetrica A: Transport Science*, 9(10), 925-948. Available in: <https://doi.org/10.1080/18128602.2012.719165>

The edge frequency is inversely related to the exposure to delay. For example, in a transit network, a boarding edge has a frequency that is the inverse of the headway (or half the headway, depending on the model assumptions). A walking edge has no exposure to delay, so its frequency is assumed to be infinite.

Bell's network is a synthetic network: it is a  $n$ -by- $n$  grid bi-directional network<sup>Page 170, 23</sup>. The edge travel time is taken as random number following a uniform distribution:

$$u_a \sim \mathbf{U}[0, 1)$$

To demonstrate how the hyperpath depends on the exposure to delay, we will use a positive constant ( $\alpha$ ) and a base delay ( $d_a$ ) for each edge that follows a uniform distribution:

$$d_a \sim \mathbf{U}[0, 1)$$

The constant  $\alpha \geq 0$  allows us to adjust the edge frequency as follows:

$$f_a = \begin{cases} 1/(\alpha d_a) & \text{if } \alpha d_a \neq 0 \\ \infty & \text{otherwise} \end{cases}$$

Notice that a smaller  $\alpha$  value implies higher edge frequencies, and vice versa.

## 8.2.2 Hyperpath computation

Let's create a function that:

- creates the network,
- computes the edge frequency given an input value for  $\alpha$ ,
- computes the shortest hyperpath,
- and plots the network and hyperpath.

We start with  $\alpha = 0$ . This implies that there is no delay over all the network. The resulting hyperpath corresponds to the same shortest path that Dijkstra's algorithm would have computed. You can call NetworkX's method `nx.dijkstra_path` to compute the shortest path.

To introduce some delay in the network, we can increase the value of  $\alpha$ . We notice that the shortest path is no longer unique and multiple routes are suggested. The link usage probability is reflected by the line width. The majority of the flow still follows the shortest path, but some of it is distributed among different alternative paths. This becomes more apparent as we further increase  $\alpha$ .

The code below allows you to reproduce the same experiment that resulted in the previous figures.

Listing 0: Hyperpath computation

```
# Let's import some packages
import matplotlib.pyplot as plt
import networkx as nx
import numpy as np
import pandas as pd


from aequilibrae.paths.public_transport import HyperpathGenerating
from numba import jit

RANDOM_SEED = 124 # random seed
```


(continues on next page)

<sup>3</sup> Bell, M.G.H. (2009) "Hyperstar: A multi-path Astar algorithm for risk averse vehicle navigation", Transportation Research Part B: Methodological, 43(1), 97-107. Available in: <https://doi.org/10.1016/j.trb.2008.05.010>.


Shortest hyperpath - Bell's network  $\alpha=0.0$

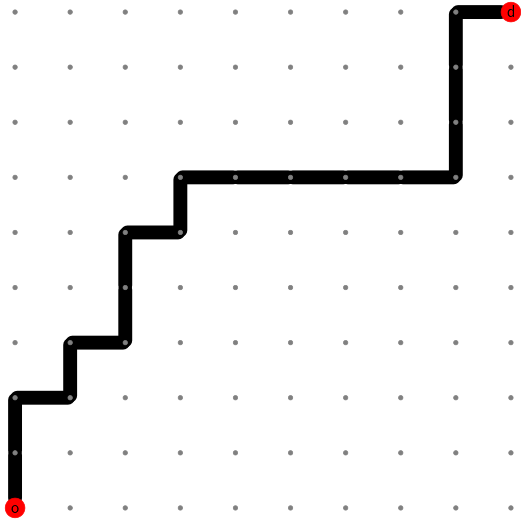


Shortest path - Bell's network

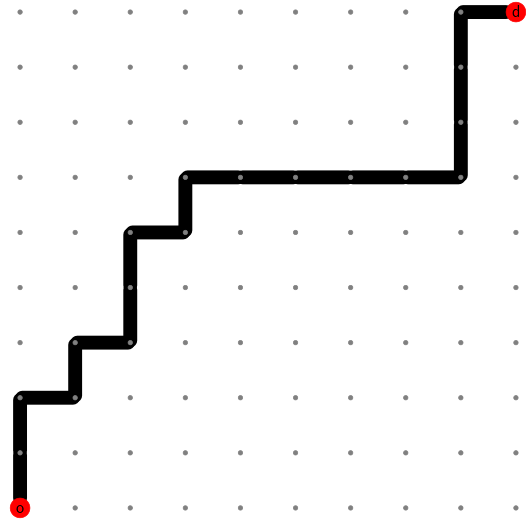


Shortest hyperpath - Bell's network  $\alpha=0.5$

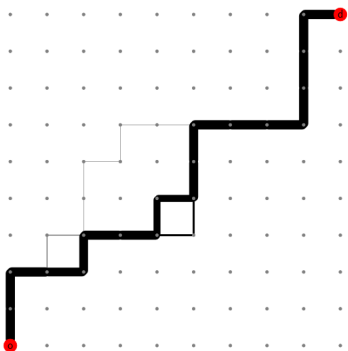

Shortest hyperpath - Bell's network  $\alpha=1.0$

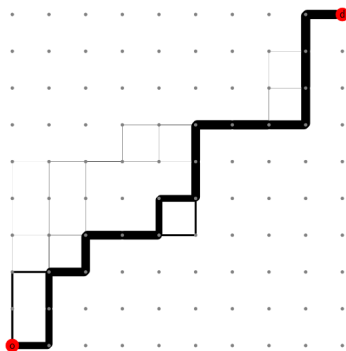

Shortest hyperpath - Bell's network  $\alpha=100.0$

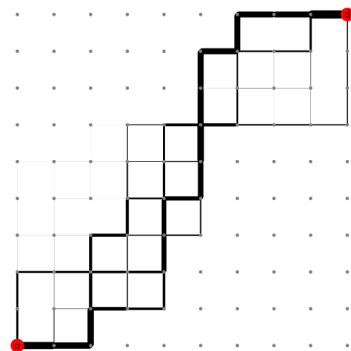

(continued from previous page)

```

FIGURE_SIZE = (6, 6) # figure size

def create_vertices(n):
    x = np.linspace(0, 1, n)
    y = np.linspace(0, 1, n)
    xv, yv = np.meshgrid(x, y, indexing="xy")
    vertices = pd.DataFrame()
    vertices["x"] = xv.ravel()
    vertices["y"] = yv.ravel()
    return vertices

@jit
def create_edges_numba(n):
    m = 2 * n * (n - 1)
    tail = np.zeros(m, dtype=np.uint32)
    head = np.zeros(m, dtype=np.uint32)
    k = 0
    for i in range(n - 1):
        for j in range(n):
            tail[k] = i + j * n
            head[k] = i + 1 + j * n
            k += 1
            tail[k] = j + i * n
            head[k] = j + (i + 1) * n
            k += 1
    return tail, head

def create_edges(n, seed=124):
    tail, head = create_edges_numba(n)
    edges = pd.DataFrame()
    edges["tail"] = tail
    edges["head"] = head
    m = len(edges)
    rng = np.random.default_rng(seed=seed)
    edges["trav_time"] = rng.uniform(0.0, 1.0, m)
    edges["delay_base"] = rng.uniform(0.0, 1.0, m)
    return edges

def generate_hyperpath(n, alpha):
    edges = create_edges(n, seed=RANDOM_SEED)
    delay_base = edges.delay_base.values
    indices = np.where(delay_base == 0.0)
    delay_base[indices] = 1.0
    freq_base = 1.0 / delay_base
    freq_base[indices] = np.inf

    edges["freq_base"] = freq_base
    if alpha == 0.0:
        edges["freq"] = np.inf
    else:
        edges["freq"] = edges.freq_base / alpha

```

(continues on next page)

```

# Spiess & Florian
sf = HyperpathGenerating(
    edges, tail="tail", head="head", trav_time="trav_time", freq="freq"
)
sf.run(origin=0, destination=n * n - 1, volume=1.0)

return sf

def plot_shortest_hyperpath(n=10, alpha=10.0, is_dijkstra=False, figsize=FIGURE_SIZE,
→ title=""):
    vertices = create_vertices(n)
    n_vertices = n * n
    sf = generate_hyperpath(n, alpha)

    attr = "trav_time" if is_dijkstra else "volume"

    # NetworkX
    G = nx.from_pandas_edgelist(
        sf._edges,
        source="tail",
        target="head",
        edge_attr=attr,
        create_using=nx.DiGraph,
    )

    if is_dijkstra:
        nodes = nx.dijkstra_path(G, 0, n*n-1, weight='trav_time')
        edges = list(nx.utils.pairwise(nodes))
        widths = 1e2 * np.array([1 if (u,v) in edges else 0 for u, v in G.edges()]) /
→ n
    else:
        widths = 1e2 * np.array([G[u][v]["volume"] for u, v in G.edges()]) / n
        pos = vertices[["x", "y"]].values

    _ = plt.figure(figsize=figsize)
    node_colors = n_vertices * ["gray"]
    node_colors[0] = "r"
    node_colors[-1] = "r"
    ns = 100 / n
    node_size = n_vertices * [ns]
    node_size[0] = 20 * ns
    node_size[-1] = 20 * ns
    labeldict = {}
    labeldict[0] = "O"
    labeldict[n * n - 1] = "D"
    nx.draw(
        G,
        pos=pos,
        width=widths,
        node_size=node_size,
        node_color=node_colors,

```

(continues on next page)

(continued from previous page)

```

        arrowstyle="-",
        labels=labeldict,
        with_labels=True,
    )
    ax = plt.gca()
    _ = ax.set_title(title, color="k")

plot_shortest_hyperpath(n=10, alpha=0.0, title="Shortest hyperpath - Bell's Network
↪ $\\alpha=0.0")
plot_shortest_hyperpath(n=10, alpha=0.0, is_dijkstra=True, title="Shortest path -
↪ Dijkstra's Algorithm")
plot_shortest_hyperpath(n=10, alpha=0.5, title="Shortest hyperpath - Bell's Network
↪ $\\alpha=0.5")
plot_shortest_hyperpath(n=10, alpha=1.0, title="Shortest hyperpath - Bell's Network
↪ $\\alpha=1.0")
plot_shortest_hyperpath(n=10, alpha=100.0, title="Shortest hyperpath - Bell's
↪ Network $\\alpha=100.0")

```

### 8.2.3 References

## 8.3 Transit skimming

Transit skimming in AequilibraE is incredibly flexible, but more sophisticated use requires a good understanding of the structure of the *Transit assignment graph*, so we recommend reading that section first.

For typical use cases, the method `set_skimming_fields` accepts a set of predefined fields which are defined based on the auto-generated link types. These include:

- discrete: `'boardings'`, `'alightings'`, `'inner_transfers'`, `'outer_transfers'`, and `'transfers'`.
- continuous: `'trav_time'`, `'on_board_trav_time'`, `'dwelling_time'`, `'egress_trav_time'`, `'access_trav_time'`, `'walking_trav_time'`, `'transfer_time'`, `'in_vehicle_trav_time'`, and `'waiting_time'`.

```

>>> from aequilibrae.paths import TransitAssignment, TransitClass

>>> project = create_example(project_path, "coquimbo")
>>> data = Transit(project)

>>> graph = data.create_graph(
...     with_outer_stop_transfers=False,
...     with_walking_edges=False,
...     blocking_centroid_flows=False,
...     connector_method="overlapping_regions",
... )
>>> project.network.build_graphs()

>>> graph.create_line_geometry(method="direct", graph="c")

>>> transit_graph = graph.to_transit_graph()

>>> # We mock a demand matrix
>>> num_zones = len(transit_graph.centroids)

```

(continues on next page)

(continued from previous page)

```

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(zones=num_zones, matrix_names=["pt"], memory_only=True)
>>> mat.index = transit_graph.centroids[:]
>>> mat.matrices[:, :, 0] = np.full((num_zones, num_zones), 1.0)
>>> mat.computational_view()

>>> # We can now execute the assignment, and we will use some of the default skimming_
↳fields
>>> skim_cols = ["trav_time", "boardings", "in_vehicle_trav_time", "egress_trav_time",
↳ "access_trav_time"]

>>> assigclass = TransitClass(name="pt", graph=transit_graph, matrix=mat)

>>> assig = TransitAssignment()
>>> assig.add_class(assigclass)
>>> assig.set_time_field("trav_time")
>>> assig.set_frequency_field("freq")

>>> assig.set_skimming_fields(skim_cols) # Skimming must be set after a transit_
↳assignment class is added

>>> assig.set_algorithm("os")
>>> assigclass.set_demand_matrix_core("pt")

>>> assig.execute()

>>> project.close()

```

More sophisticated skimming is also possible, such as skimming related to specific routes and/or modes. As it is the case with traffic graphs, this type of exercise consists basically of defining fields in the graph that represent the desired skimming metrics.

One example is skimming travel time in rail only.

```

>>> from aequilibrae.paths import TransitAssignment, TransitClass

>>> project = create_example(f"{project_path}v2", "coquimbo")
>>> data = Transit(project)

>>> graph = data.create_graph(
...     with_outer_stop_transfers=False,
...     with_walking_edges=False,
...     blocking_centroid_flows=False,
...     connector_method="overlapping_regions",
... )
>>> project.network.build_graphs()

>>> graph.create_line_geometry(method="direct", graph="c")

>>> transit_graph = graph.to_transit_graph()

>>> # We now define a new field in the graph that will be used for skimming
>>> transit_graph.graph["rail_trav_time"] = np.where(

```

(continues on next page)

(continued from previous page)

```

...     transit_graph.graph["link_type"].isin(["on-board", "dwell"]), 0, transit_
↳graph.graph["trav_time"]
... )

>>> all_routes = transit.get_table("routes")
>>> rail_ids = all_routes.query("route_type in [1, 2]").route_id.to_numpy()

# Assign zero travel time to all non-rail links
>>> transit_graph.graph.loc[~transit_graph.graph.line_id.isin(rail_ids), "rail_trav_
↳time"] = 0

>>> # We mock a demand matrix
>>> num_zones = len(transit_graph.centroids)

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(zones=num_zones, matrix_names=["pt"], memory_only=True)
>>> mat.index = transit_graph.centroids[:]
>>> mat.matrices[:, :, 0] = np.full((num_zones, num_zones), 1.0)
>>> mat.computational_view()

>>> # We can now execute the assignment, and we will use some of the default skimming_
↳fields
>>> skim_cols = ["trav_time", "boardings", "in_vehicle_trav_time", "egress_trav_time",
↳ "access_trav_time"]

>>> assigclass = TransitClass(name="pt", graph=transit_graph, matrix=mat)

>>> assig = TransitAssignment()
>>> assig.add_class(assigclass)
>>> assig.set_time_field("trav_time")
>>> assig.set_frequency_field("freq")

>>> # Skimming must be set after a transit assignment class is added
>>> assig.set_skimming_fields(["rail_trav_time"])

>>> assig.set_algorithm("os")
>>> assigclass.set_demand_matrix_core("pt")

>>> assig.execute()

>>> project.close()

```

## 8.4 Examples

### 8.4.1 Public Transport

#### Import GTFS

In this example, we import a GTFS feed to our model and perform map matching.

We use data from Coquimbo, a city in La Serena Metropolitan Area in Chile.

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.transit.Transit()`
- `aequilibrae.transit.lib_gtfs.GTFSRouteSystemBuilder()`

```
# Imports
from uuid import uuid4
from os import remove
from os.path import join
from tempfile import gettempdir

import folium
import geopandas as gpd
import pandas as pd

from aequilibrae.project.database_connection import database_connection
from aequilibrae.transit import Transit
from aequilibrae.utils.create_example import create_example
```

```
# Let's create an empty project on an arbitrary folder.
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

As the Coquimbo example already has a complete GTFS model, we shall remove its public transport database for the sake of this example.

```
remove(join(fldr, "public_transport.sqlite"))
```

Let's import the GTFS feed.

```
dest_path = join(fldr, "gtfs_coquimbo.zip")
```

Now we create our Transit object and import the GTFS feed into our model. This will automatically create a new public transport database.

```
data = Transit(project)

transit = data.new_gtfs_builder(agency="Lisanco", file_path=dest_path)
```

To load the data, we must choose one date. We're going to continue with 2016-04-13 but feel free to experiment with any other available dates. Transit class has a function allowing you to check dates for the GTFS feed. It should take approximately 2 minutes to load the data.

```
transit.load_date("2016-04-13")

# Now we execute the map matching to find the real paths.
# Depending on the GTFS size, this process can be really time-consuming.

# transit.set_allow_map_match(True)
# transit.map_match()
```

(continues on next page)

(continued from previous page)

```
# Finally, we save our GTFS into our model.
transit.save_to_disk()
```

Now we will plot one of the route's patterns we just imported

```
conn = database_connection("transit")

patterns = pd.read_sql("SELECT pattern_id, ST_AsText(geometry) geom FROM routes;",
↳ con=conn)
stops = pd.read_sql("""SELECT stop_id, ST_X(geometry) X, ST_Y(geometry) Y FROM stops""
↳ ", con=conn)
```

We turn the patterns and stops DataFrames into GeoDataFrames so we can plot them more easily.

```
patterns = gpd.GeoDataFrame(patterns, geometry=gpd.GeoSeries.from_wkt(patterns["geom"]
↳ ), crs=4326)
stops = gpd.GeoDataFrame(stops, geometry=gpd.GeoSeries.from_xy(stops["X"], stops["Y"]
↳ ), crs=4326)
```

And plot out data!

```
map = patterns.explore(color=["#146DB3", "#EB9719"], style_kwds={"weight": 4}, name=
↳ "links")
map = stops.explore(m=map, color="black", style_kwds={"radius": 2, "fillOpacity": 1.0}
↳ , name="stops")

folium.LayerControl().add_to(map)
map
```

```
project.close()
```

## Public transport assignment with skimming

In this example, we build on the transit assignment example and add skimming to it.

We use data from Coquimbo, a city in La Serena Metropolitan Area in Chile.

### References

WE HIGHLY RECOMMEND YOU READ THE DOCUMENTATION ON SKIMMING BEFORE PROCEEDING

- *Public Transport*

### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.transit.Transit()`
- `aequilibrae.transit.TransitGraphBuilder()`

- `aequilibrae.paths.TransitClass()`
- `aequilibrae.paths.TransitAssignment()`
- `aequilibrae.matrix.AequilibraeMatrix()`

Imports for example construction

```
from os.path import join
from tempfile import gettempdir
from uuid import uuid4

import numpy as np

from aequilibrae.matrix import AequilibraeMatrix
from aequilibrae.paths import TransitAssignment, TransitClass
from aequilibrae.project.database_connection import database_connection
from aequilibrae.transit import Transit
from aequilibrae.transit.transit_graph_builder import TransitGraphBuilder
from aequilibrae.utils.create_example import create_example
```

```
# Let's create an empty project on an arbitrary folder.
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

Let's create our Transit object.

```
data = Transit(project)
```

### Graph building

Let's build the transit network. We'll disable `outer_stop_transfers` and `walking_edges` because Coquimbo doesn't have any parent stations.

For the OD connections we'll use the `overlapping_regions` method and create some accurate line geometry later. Creating the graph should only take a moment. By default zoning information is pulled from the project network. If you have your own zoning information add it using `graph.add_zones(zones)` then `graph.create_graph()`.

```
graph = data.create_graph(
    with_outer_stop_transfers=False,
    with_walking_edges=False,
    blocking_centroid_flows=False,
    connector_method="overlapping_regions"
)
```

### Connector project matching

```
project.network.build_graphs()
graph.create_line_geometry(method="connector project match", graph="c")
data.save_graphs()
data.load()
```

(continues on next page)

(continued from previous page)

```
# Reading back into AequilibraE
pt_con = database_connection("transit")
graph_db = TransitGraphBuilder.from_db(pt_con, project.network.periods.default_period.
↳period_id)
graph_db.vertices.drop(columns="geometry")

# To perform an assignment we need to convert the graph builder into a graph.
transit_graph = graph_db.to_transit_graph()
```

```
# Mock demand matrix
zones = len(transit_graph.centroids)
mat = AequilibraeMatrix()
mat.create_empty(zones=zones, matrix_names=['pt'], memory_only=True)
mat.index = transit_graph.centroids[:]
mat.matrices[:, :, 0] = np.full((zones, zones), 1.0)
mat.computational_view()
```

## Hyperpath generation/assignment

We'll create a `TransitAssignment` object as well as a `TransitClass`.

```
# Create the assignment class
assigclass = TransitClass(name="pt", graph=transit_graph, matrix=mat)

assig = TransitAssignment()

assig.add_class(assigclass)

# Set assignment
assig.set_time_field("trav_time")
assig.set_frequency_field("freq")
assig.set_skimming_fields(["trav_time", "boardings", "freq"])
assig.set_algorithm("os")
assigclass.set_demand_matrix_core("pt")

# Perform the assignment for the transit classes added
assig.execute()

# We can use the get_skim_results() method to retrieve the skims
assig.get_skim_results()["pt"].matrix["boardings"].sum()
```

## Saving results

We'll be saving the skimming results.

```
assig.save_results(table_name='hyperpath example')
```

## Wrapping up

```
project.close()
```

### Public transport assignment with Optimal Strategies

In this example, perform a Spiess & Florian assignment. [Click here](#) to check out the paper.

We use data from Coquimbo, a city in La Serena Metropolitan Area in Chile.

#### References

- *Public Transport*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.transit.Transit()`
- `aequilibrae.transit.TransitGraphBuilder()`
- `aequilibrae.paths.TransitClass()`
- `aequilibrae.paths.TransitAssignment()`
- `aequilibrae.matrix.AequilibraeMatrix()`

```
# Imports for example construction
from uuid import uuid4
from os.path import join
from tempfile import gettempdir

from aequilibrae.transit import Transit
from aequilibrae.utils.create_example import create_example
```

Let's create an empty project on an arbitrary folder.

```
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

Let's create our `Transit` object.

```
data = Transit(project)
```

### Graph building

Let's build the transit network. We'll disable `outer_stop_transfers` and `walking_edges` because Coquimbo doesn't have any parent stations.

For the OD connections we'll use the `overlapping_regions` method and create some accurate line geometry later. Creating the graph should only take a moment. By default zoning information is pulled from the project network. If you have your own zoning information add it using `graph.add_zones(zones)` then `graph.create_graph()`.

```
graph = data.create_graph(with_outer_stop_transfers=False, with_walking_edges=False, ↵
↳blocking_centroid_flows=False, connector_method="overlapping_regions")
```

(continues on next page)

(continued from previous page)

```
# We drop geometry here for the sake of display.
graph.vertices.drop(columns="geometry")
```

```
graph.edges
```

The graphs also stored in the `Transit.graphs` dictionary. They are keyed by the 'period\_id' they were created for. A graph for a different 'period\_id' can be created by providing `period_id=` in the `Transit.create_graph` call. You can view previously created periods with the `Periods` object.

```
periods = project.network.periods
periods.data
```

### Connector project matching

```
project.network.build_graphs()
```

Now we'll create the line strings for the access connectors, this step is optional but provides more accurate distance estimations and better looking geometry.

Because Coquimbo doesn't have many walking edges we'll match onto the "c" graph.

```
graph.create_line_geometry(method="connector project match", graph="c")
```

### Saving and reloading

Lets save all graphs to the 'public\_transport.sqlite' database.

```
data.save_graphs()
```

We can reload the saved graphs with `data.load`. This will create new `TransitGraphBuilder`'s based on the 'period\_id' of the saved graphs. The graph configuration is stored in the 'transit\_graph\_config' table in 'project\_database.sqlite' as serialised JSON.

```
data.load()
```

We can also remove the previously saved graphs.

```
# data.remove_graphs()
```

Links and nodes are stored in a similar manner to the 'project\_database.sqlite' database.

### Reading back into AequibraE

You can create back in a particular graph via it's 'period\_id'.

```
from aequibrae.project.database_connection import database_connection
from aequibrae.transit.transit_graph_builder import TransitGraphBuilder
```

```
pt_con = database_connection("transit")

graph_db = TransitGraphBuilder.from_db(pt_con, periods.default_period.period_id)
graph_db.vertices.drop(columns="geometry")
```

```
graph_db.edges
```

### Converting to a AequilbraE graph object

To perform an assignment we need to convert the graph builder into a graph.

```
transit_graph = graph.to_transit_graph()
```

### Mock demand matrix

We'll create a mock demand matrix with demand 1 for every zone. We'll also need to convert from zone\_id's to node\_id's.

```
import numpy as np
from aequilbrae.matrix import AequilbraeMatrix
```

```
zones_in_the_model = len(transit_graph.centroids)

names_list = ['pt']

mat = AequilbraeMatrix()
mat.create_empty(zones=zones_in_the_model,
                 matrix_names=names_list,
                 memory_only=True)
mat.index = transit_graph.centroids[:]
mat.matrices[:, :, 0] = np.full((zones_in_the_model, zones_in_the_model), 1.0)
mat.computational_view()
```

### Hyperpath generation/assignment

We'll create a TransitAssignment object as well as a TransitClass

```
from aequilbrae.paths import TransitAssignment, TransitClass
```

Create the assignment class

```
assigclass = TransitClass(name="pt", graph=transit_graph, matrix=mat)

assig = TransitAssignment()

assig.add_class(assigclass)

# We need to tell AequilbraE where to find the appropriate fields we want to use,
# as well as the assignment algorithm to use.
assig.set_time_field("trav_time")
assig.set_frequency_field("freq")

assig.set_algorithm("os")
```

When there's multiple matrix cores we'll also need to set the core to use for the demand as we can only assign one at a time.

```
assignclass.set_demand_matrix_core("pt")
```

Let's perform the assignment for the transit classes added

```
assign.execute()
```

View the results

```
assign.results()
```

### Saving results

We'll be saving the results to another sqlite db called 'results\_database.sqlite'. The 'results' table with 'project\_database.sqlite' contains some metadata about each table in 'results\_database.sqlite'.

```
assign.save_results(table_name='hyperpath example')
```

Wrapping up

```
project.close()
```

## 8.5 References



## ROUTE CHOICE

The route choice problem does not have a closed solution, and the selection of one of the many existing frameworks for solution depends on many factors<sup>1,2</sup>. A common modelling framework in practice consists of two steps: choice set generation and the choice selection process.

AequilibraE is the first modeling package with full support for route choice, from the creation of choice sets through multiple algorithms to the assignment of trips to the network using the traditional path-size logit.

### 9.1 Choice set generation

Consistent with AequilibraE's software architecture, the route choice set generation is implemented as a separate Cython module that integrates into existing AequilibraE infrastructure; this allows it to benefit from established optimisations such as graph compression and high-performance data structures.

A key point of difference in AequilibraE's implementation comes from its flexibility in allowing us to reconstruct a compressed graph for computation between any two points in the network. This is a significant advantage when preparing datasets for model estimation, as it is possible to generate choice sets between exact network positions collected from observed data (e.g. vehicle GPS data, location-based services, etc.), which is especially relevant in the context of micro-mobility and active modes.

There are two different route choice set generation algorithms available in AequilibraE: Link Penalisation (LP), and Breadth-First Search with Link-Elimination (BFS-LE). The underlying implementation relies on the use of several specialized data structures to minimise the overhead of route set generation and storage, as both methods were implemented in Cython for easy access to existing AequilibraE methods and standard C++ data structures.

The process is designed to run multiple calculations simultaneously across the origin-destination pairs, utilising multi-core processors and improving computational performance. As Rieser-Schüssler *et al.* (2012)[1] noted, pathfinding is the most time-consuming stage in generating a set of route choices. Despite the optimisations implemented to reduce the computational load of maintaining the route set generation overhead, computational time is still not trivial, as pathfinding remains the dominant factor in determining runtime.

#### 9.1.1 Link-Penalization

The link Penalization (LP) method is one of the most traditional approaches for generating route choice sets. It consists of an iterative approach where, in each iteration, the shortest path between the origin and the destination in question is computed. After each iteration, however, a pre-defined penalty factor is applied to all links that are part of the path found, essentially modifying the graph to make the previously found path less attractive.

The LP method is a simple and effective way to generate route choice sets, but it is sensitive to the penalty factor, which can significantly affect the quality of the generated choice sets, requiring experimentation during the model development/estimation stage.

---

<sup>1</sup> Rieser-Schüssler, N., Balmer, M., and Axhausen, K.W. (2012). Route choice sets for very high-resolution data. *Transportmetrica A: Transport Science*, 9(9), 825–845. <https://doi.org/10.1080/18128602.2012.671383>

<sup>2</sup> Zill, J.C. and Camargo, P.V. (2024) State-Wide Route Choice Models. Presented at the ATRF, Melbourne, Australia.

The overhead of the LP method is negligible due to AequilibraE's internal data structures that allow for easy data manipulation of the graph in memory.

### 9.1.2 BFS-LE

At a high level, BFS-LE operates on a graph of graphs, exploring unique graphs linked by a single removed edge. Each graph can be uniquely categorised by a set of removed links from a common base graph, allowing us to avoid explicitly maintaining the graph of graphs. Instead, generating and storing that graph's set of removed links in the breadth-first search (BFS) order.


To efficiently store and determine the uniqueness of a new route or removed link sets, we used modified hash functions with properties that allowed us to store and nest them within standard C++ data structures. We used a commutative hash function for the removed link sets to allow for amortised  $O(1)$  order-independent uniqueness testing. While the removed link sets are always constructed incrementally, we did not opt for an incremental hash function as we did not deem this a worthwhile optimisation. The removed link sets rarely grew larger than double digits, even on a network with over 600,000 directed links. This may be an area worth exploring for networks with a significantly larger number of desired routes than links between ODs.

For uniqueness testing of discovered routes, AequilibraE implements a traditional, non-commutative hash function. Since cryptographic security was not a requirement for our purposes, we use a fast general-purpose integer hash function. Further research could explore the use of specialised integer vector hash functions. As we did not find the hashing had a non-negligible influence on the runtime performance, this optimisation was not tested.

AequilibraE also implements a combination of LP and BFS-LP as an optional feature to the latter algorithm, as recommended by Rieser-Schüssler *et al.* (2012)<sup>1</sup>, which is also a reference for further details on the BFS-LE algorithm.

### 9.1.3 Comparative experiment

In an experiment with nearly 9,000 observed vehicle GPS routes covering a large Australian State, we found that all three algorithms (LP, BFS-LE, and BFS-LE+LP) had excellent performance in reproducing the observed routes. However, the computational overhead of BFS-LE is substantial enough to recommend always verifying if LP is fit-for-purpose.

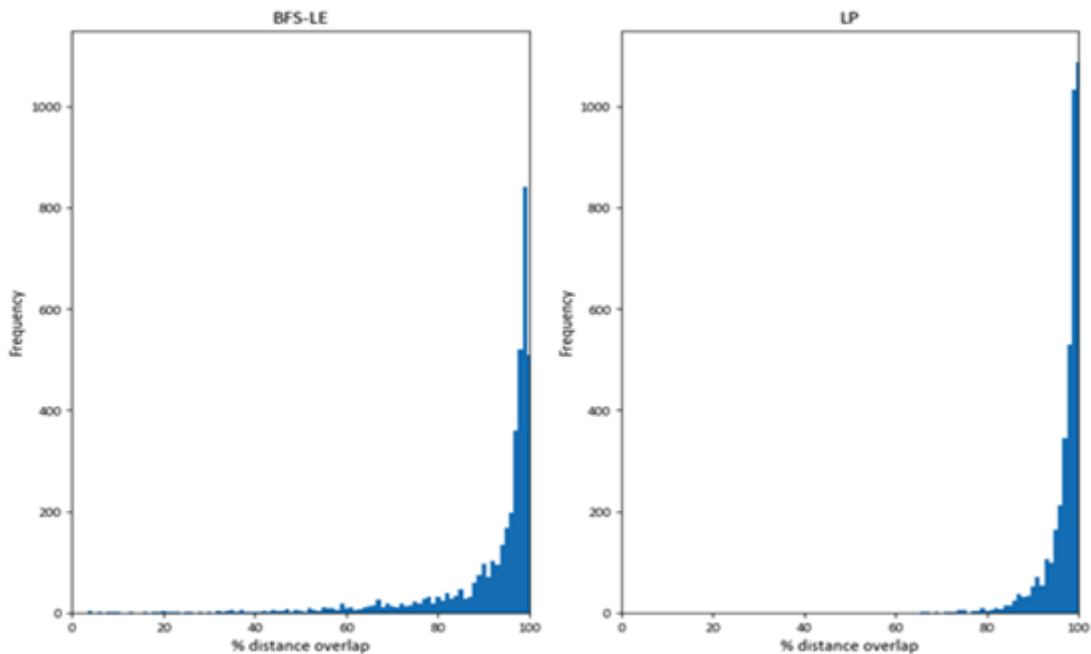

<sup>1</sup> Rieser-Schüssler, N., Balmer, M., and Axhausen, K.W. (2012). Route choice sets for very high-resolution data. *Transportmetrica A: Transport Science*, 9(9), 825–845. <https://doi.org/10.1080/18128602.2012.671383>

## 9.1.4 References

## 9.2 Path-size logit (PSL)

Path-size logit is based on the multinomial logit (MNL) model, which is one of the most used models in the transportation field in general<sup>1</sup>. It can be derived from random utility-maximizing principles with certain assumptions on the distribution of the random part of the utility. To account for the correlation of alternatives, Ramming (2002)<sup>2</sup> introduced a correction factor that measures the overlap of each route with all other routes in a choice set based on shared link attributes, which gives rise to the PSL model. The PSL is currently the most used route choice model in practice, hence its choice as the first algorithm to be implemented in AequilibraE.

The PSL model's utility function is defined by:

$$U_i = V_i + \beta_{PSL} \times \log \gamma_i + \varepsilon_i$$

with path overlap correction factor:

$$\gamma_i = \sum_{a \in A_i} \frac{l_a}{L_i} \times \frac{1}{\sum_{k \in R} \delta_{a,k}}$$

Here,  $U_i$  is the total utility of alternative  $i$ ,  $V_i$  is the observed utility,  $\varepsilon_i$  is an identical and independently distributed random variable with a Gumbel distribution,  $\delta_{a,k}$  is the Kronecker delta,  $l_a$  is cost of link  $a$ ,  $L_i$  is total cost of route  $i$ ,  $A_i$  is the link set and  $R$  is the route choice set for individual  $j$  (index  $j$  suppressed for readability). The path overlap correction factor  $\gamma$  can be theoretically derived by aggregation of alternatives under certain assumptions, see<sup>3</sup> and references therein.

Notice that AequilibraE's path computation procedures require all link costs to be positive. For that reason, link utilities (or disutilities) must be positive, while its obvious minus sign is handled internally. This mechanism prevents the possibility of links with actual positive utility, but those cases are arguably not reasonable to exist in practice.

### Important

**AequilibraE uses cost to compute path overlaps rather than distance.**

### 9.2.1 Binary logit filter

A binary logit filter is available to remove unfavourable routes from the route set before applying the path-sized logit assignment. This filter accepts a numerical parameter for the minimum demand share acceptable for any path, which is approximated by the binary logit considering the shortest path and each subsequent path.

### 9.2.2 Full process overview

The estimation of route choice models based on vehicle GPS data can be explored on a family of papers scheduled to be presented at the ATRF 2024<sup>4,5,6</sup>.

<sup>1</sup> Ben-Akiva, M., and Lerman, S. (1985) Discrete Choice Analysis. The MIT Press.

<sup>2</sup> Ramming, M.S. (2002) Network Knowledge and Route Choice. Massachusetts Institute of Technology. Available at: <https://dspace.mit.edu/bitstream/handle/1721.1/49797/50436022-MIT.pdf?sequence=2&isAllowed=y>

<sup>3</sup> Frejinger, E. (2008) Route Choice Analysis: Data, Models, Algorithms and Applications. Available at: <https://infoscience.epfl.ch/server/api/core/bitstreams/6d43511f-e9c4-4fb4-b5c9-83a4515154b8/content>

<sup>4</sup> Zill, J.C. and Camargo, P.V. (2024) State-Wide Route Choice Models. Presented at the ATRF, Melbourne, Australia.

<sup>5</sup> Camargo, P.V. and Imai, R. (2024) Map-Matching Large Streams of Vehicle GPS Data into Bespoke Networks. Presented at the ATRF, Melbourne.

<sup>6</sup> Moss, J., Camargo, P.V., de Freitas, C. and Imai, R. (2024) High-Performance Route Choice Set Generation on Large Networks. Presented at the ATRF, Melbourne.

## 9.2.3 References

# 9.3 Examples

## 9.3.1 Route Choice

### Route Choice set generation

In this example, we show how to generate route choice sets for estimation of route choice models, using a city in La Serena Metropolitan Area in Chile.

#### References

- *Route Choice*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.RouteChoice()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join

import folium
import numpy as np
from aequilibrae.utils.create_example import create_example
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

### Model parameters

Let's select a set of nodes of interest

```
od_pairs_of_interest = [(71645, 79385), (77011, 74089)]
nodes_of_interest = (71645, 74089, 77011, 79385)
```

Let's build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with NaNs.
# This is true, but we won't use those fields.
```

We grab the graph for cars

```
graph = project.network.graphs["c"]

# we also see what graphs are available
project.network.graphs.keys()

graph.set_graph("distance")

# We set the nodes of interest as centroids to make sure they are not simplified away.
↳when we create the network
graph.prepare_graph(np.array(nodes_of_interest))
```

## Route Choice class

Here we'll construct and use the Route Choice class to generate our route sets

```
from aequilibrae.paths import RouteChoice
```

This object construct might take a minute depending on the size of the graph due to the construction of the compressed link to network link mapping that's required. This is a one time operation per graph and is cached.

```
rc = RouteChoice(graph)
```

It is highly recommended to set either `max_routes` or `max_depth` to prevent runaway results.

We'll also set a 5% penalty (`penalty=1.05`), which is likely a little too large, but it creates routes that are distinct enough to make this simple example more interesting.

```
rc.set_choice_set_generation("bfsle", max_routes=5, penalty=1.05)
rc.prepare(od_pairs_of_interest)
rc.execute(perform_assignment=True)

choice_set = rc.get_results()
```

If we were interested in storing the route choice result, we could also write them to disk using the `save_path_files` method.

```
# rc.save_path_files(path)
```

From those path files we could also preform a full assignment or select link analysis by using the `execute_from_path_files` method.

```
# rc.execute_from_path_files(path)
```

Or if we had externally computed route choice sets, we can use AequilibraEs assignment procedures by loading them with the `execute_from_pandas` method.

```
# rc.execute_from_pandas(path_files_df)
```

## Plotting choice sets

Now we will plot the paths we just created for the second OD pair

```
# We get the data we will use for the plot: links, nodes and the route choice set
plot_routes = choice_set[(choice_set["origin id"] == 77011)]["route set"].values

links = project.network.links.data

# For ease of plot, we create a GeoDataFrame for each route in the choice set
route_1 = links[links.link_id.isin(plot_routes[0])]
route_2 = links[links.link_id.isin(plot_routes[1])]
route_3 = links[links.link_id.isin(plot_routes[2])]
route_4 = links[links.link_id.isin(plot_routes[3])]
route_5 = links[links.link_id.isin(plot_routes[4])]

nodes = project.network.nodes.data
nodes = nodes[nodes["node_id"].isin([77011, 74089])]
```

```
map = route_1.explore(color="red", style_kwds={"weight": 3}, name="route_1")
map = route_2.explore(m=map, color="blue", style_kwds={"weight": 3}, name="route_2")
map = route_3.explore(m=map, color="green", style_kwds={"weight": 3}, name="route_3")
map = route_4.explore(m=map, color="purple", style_kwds={"weight": 3}, name="route_4")
map = route_5.explore(m=map, color="orange", style_kwds={"weight": 3}, name="route_5")

map = nodes.explore(m=map, color="black", style_kwds={"radius": 5, "fillOpacity": 1.0}
↪, name="network_nodes")

folium.LayerControl().add_to(map)
map
```

```
project.close()
```

### Route Choice

In this example, we show how to perform route choice set generation using BFSLE and Link penalisation, for a city in La Serena Metropolitan Area in Chile.

#### References

- *Route Choice*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.RouteChoice()`
- `aequilibrae.matrix.AequilibraeMatrix()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
```

(continues on next page)

(continued from previous page)

```
from os.path import join

from aequilibrae.utils.create_example import create_example
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

```
import logging
import sys
```

```
# When the project opens, we can tell the logger to direct all messages to the
↳terminal as well
logger = project.logger
stdout_handler = logging.StreamHandler(sys.stdout)
formatter = logging.Formatter("%(asctime)s;%(levelname)s ; %(message)s")
stdout_handler.setFormatter(formatter)
logger.addHandler(stdout_handler)
```

## Model parameters

```
import numpy as np
```

We'll set the parameters for our route choice model. These are the parameters that will be used to calculate the utility of each path. In our example, the utility is equal to  $distance * theta$ , and the path overlap factor (PSL) is equal to  $beta$ .

```
# Distance factor
theta = 0.00011

# PSL parameter
beta = 1.1
```

Let's select a set of nodes of interest

```
nodes_of_interest = (71645, 74089, 77011, 79385)
```

Let's build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with NaNs.
# This is true, but we won't use those fields.
```

We also see what graphs are available

```
project.network.graphs.keys()
```

We grab the graph for cars

```
graph = project.network.graphs["c"]
```

(continues on next page)

(continued from previous page)

```

# Let's say that utility is just a function of distance, so we build our 'utility'
↳field as distance * theta
graph.network = graph.network.assign(utility=graph.network.distance * theta)

# Prepare the graph with all nodes of interest as centroids
graph.prepare_graph(np.array(nodes_of_interest))

# And set the cost of the graph the as the utility field just created
graph.set_graph("utility")

```

## Mock demand matrix

We'll create a mock demand matrix with demand 1 for every zone and prepare it for computation.

```

from aequilibrae.matrix import AequilibraeMatrix

names_list = ["demand", "5x demand"]

mat = AequilibraeMatrix()
mat.create_empty(zones=graph.num_zones, matrix_names=names_list, memory_only=True)
mat.index = graph.centroids[:]
mat.matrices[:, :, 0] = np.full((graph.num_zones, graph.num_zones), 10.0)
mat.matrices[:, :, 1] = np.full((graph.num_zones, graph.num_zones), 50.0)
mat.computational_view()

```

## Create plot function

Before dive into the Route Choice class, let's define a function to plot assignment results.

```
import folium
```

```

def plot_results(link_loads):

    link_loads = link_loads[link_loads.tot > 0]
    max_load = link_loads["tot"].max()
    links = project.network.links.data
    loaded_links = links.merge(link_loads, on="link_id", how="inner")

    loads_lyr = folium.FeatureGroup("link_loads")

    # Maximum thickness we would like is probably a 10, so let's make sure we don't
    ↳go over that
    factor = 10 / max_load

    return loaded_links.explore(
        color="red",
        style_kwds={
            "style_function": lambda x: {
                "weight": x["properties"]["tot"] * factor,
            }
        },
    ),

```

(continues on next page)

(continued from previous page)

)

## Route Choice class

Here we'll construct and use the Route Choice class to generate our route sets

```
from aequilibrae.paths import RouteChoice
```

This object construct might take a minute depending on the size of the graph due to the construction of the compressed link to network link mapping that's required. This is a one time operation per graph and is cached.

```
rc = RouteChoice(graph)

# Let's check the default parameters for the Route Choice class
print(rc.default_parameters)
```

Let's add the demand. If it's not provided, link loading cannot be preformed.

```
rc.add_demand(mat)
```

It is highly recommended to set either `max_routes` or `max_depth` to prevent runaway results.

```
rc.set_choice_set_generation("bfsle", max_routes=5)
```

We can now perform a computation for single OD pair if we'd like. Here we do one between the first and last centroid as well as an assignment.

```
results = rc.execute_single(77011, 74089, demand=1.0)
print(results[0])
```

Because we asked it to also perform an assignment we can access the various results from that.

```
res = rc.get_results()
res.head()
```

```
plot_results(rc.get_load_results()["demand"])
```

## Batch operations

To perform a batch operation we need to prepare the object first. We can either provide a list of tuple of the OD pairs we'd like to use, or we can provided a 1D list and the generation will be run on all permutations.

```
rc.prepare()
```

Now we can perform a batch computation with an assignment

```
rc.execute(perform_assignment=True)
res = rc.get_results()
res.head()
```

Since we provided a matrix initially we can also perform link loading based on our assignment results.

```
rc.get_load_results()
```

We can plot these as well

```
plot_results(rc.get_load_results()["demand"])
```

### Select link analysis

We can also enable select link analysis by providing the links and the directions that we are interested in. Here we set the select link to trigger when (7369, 1) and (20983, 1) is utilised in “s11” and “s12” when (7369, 1) is utilised.

```
rc.set_select_links({"s11": [(7369, 1), (20983, 1)], "s12": [(7369, 1)]})
rc.execute(perform_assignment=True)
```

We can get then the results in a Pandas DataFrame for both the network.

```
s1 = rc.get_select_link_loading_results()
s1
```

We can also access the OD matrices for this link loading. These matrices are sparse and can be converted to SciPy sparse matrices for ease of use. They’re stored in a dictionary where the key is the matrix name concatenated with the select link set name via an underscore.

```
rc.get_select_link_od_matrix_results()
```

```
od_matrix = rc.get_select_link_od_matrix_results()["s11"]["demand"]
od_matrix.to_scipy().toarray()
```

```
project.close()
```

### Route Choice with sub-area analysis

In this example, we show how to perform sub-area analysis using route choice assignment, for a city in La Serena Metropolitan Area in Chile.

#### References

- *Route Choice*

#### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.paths.Graph()`
- `aequilibrae.paths.RouteChoice()`
- `aequilibrae.paths.SubAreaAnalysis()`
- `aequilibrae.matrix.AequilibraeMatrix()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
import itertools

import pandas as pd
import numpy as np
import folium

from aequilibrae.utils.create_example import create_example
```

```
# We create the example project inside our temp folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr, "coquimbo")
```

```
import logging
import sys
```

```
# We the project opens, we can tell the logger to direct all messages to the terminal
↳ as well
logger = project.logger
stdout_handler = logging.StreamHandler(sys.stdout)
formatter = logging.Formatter("%(asctime)s;%(levelname)s ; %(message)s")
stdout_handler.setFormatter(formatter)
logger.addHandler(stdout_handler)
```

## Model parameters

We'll set the parameters for our route choice model. These are the parameters that will be used to calculate the utility of each path. In our example, the utility is equal to  $distance * theta$ , and the path overlap factor (PSL) is equal to  $beta$ .

```
theta = 0.011 # Distance factor

beta = 1.1 # PSL parameter
```

Let's build all graphs

```
project.network.build_graphs()
# We get warnings that several fields in the project are filled with NaNs.
# This is true, but we won't use those fields.
```

We grab the graph for cars

```
graph = project.network.graphs["c"]
```

We also see what graphs are available

```
project.network.graphs.keys()
```

Let's say that utility is just a function of distance. So we build our *utility* field as the  $distance * theta$ .

## AequilibraE 1.4.1

---

```
graph.network = graph.network.assign(utility=graph.network.distance * theta)
```

Prepare the graph with all nodes of interest as centroids

```
graph.prepare_graph(graph.centroids)
```

And set the cost of the graph the as the utility field just created

```
graph.set_graph("utility")
```

### Mock demand matrix

We'll create a mock demand matrix with demand *10* for every zone and prepare it for computation.

```
from aequilibrae.matrix import AequilibraeMatrix

names_list = ["demand"]

mat = AequilibraeMatrix()
mat.create_empty(zones=graph.num_zones, matrix_names=names_list, memory_only=True)
mat.index = graph.centroids[:]
mat.matrices[:, :, 0] = np.full((graph.num_zones, graph.num_zones), 10.0)
mat.computational_view()
```

### Sub-area preparation

We need to define some polygon for our sub-area analysis, here we'll use a section of zones and create our polygon as the union of their geometry. It's best to choose a polygon that avoids any unnecessary intersections with links as the resource requirements of this approach grow quadratically with the number of links cut.

```
zones_of_interest = [29, 30, 31, 32, 33, 34, 37, 38, 39, 40, 49, 50, 51, 52, 57, 58, ↵
↵ 59, 60]
zones = project.zoning.data.set_index("zone_id")
zones = zones.loc[zones_of_interest]
zones.head()
```

### Sub-area analysis

From here there are two main paths to conduct a sub-area analysis, manual or automated. AequilibraE ships with a small class that handles most of the details regarding the implementation and extract of the relevant data. It also exposes all the tools necessary to conduct this analysis yourself if you need fine grained control.

### Automated sub-area analysis

We first construct our `SubAreaAnalysis` object from the graph, zones, and matrix we previously constructed, then configure the route choice assignment and execute it. From there the `post_process` method is able to use the route choice assignment results to construct the desired demand matrix as a `DataFrame`. If we were interested in the original origin and destination IDs for each entry we could use `subarea.post_process(keep_original_ods=True)` instead. This will attach the true ODs from the select link OD matrix as part of the index. However, this will create a significantly larger, but more flexible matrix.

```

from aequilibrae.paths import SubAreaAnalysis

subarea = SubAreaAnalysis(graph, zones, mat)
subarea.rc.set_choice_set_generation("lp", max_routes=3, penalty=1.02, store_
↳results=False)
subarea.rc.execute(perform_assignment=True)
demand = subarea.post_process()
demand

```

We'll re-prepare our graph but with our new "external" ODs.

```

new_centroids = np.unique(demand.reset_index()[["origin id", "destination id"]].to_
↳numpy().reshape(-1))
graph.prepare_graph(new_centroids)
graph.set_graph("utility")
new_centroids

```

We can then perform an assignment using our new demand matrix on the limited graph

```

from aequilibrae.paths import RouteChoice

rc = RouteChoice(graph)
rc.add_demand(demand)
rc.set_choice_set_generation("lp", max_routes=3, penalty=1.02, store_results=False,
↳seed=123)
rc.execute(perform_assignment=True)

```

Let's take the union of the zones GeoDataFrame as a polygon

```

poly = zones.union_all()
poly

```

And prepare the sub-area to plot.

```

subarea_zone = folium.Polygon(
    locations=[(x[1], x[0]) for x in poly.boundary.coords],
    fill_color="blue",
    fill_opacity=0.1,
    fill=True,
    weight=1,
)

```

We create a function to plot out link loads data more easily

```

def plot_results(link_loads):
    link_loads = link_loads[link_loads.tot > 0]
    max_load = link_loads["tot"].max()
    links = project.network.links.data
    loaded_links = links.merge(link_loads, on="link_id", how="inner")
    factor = 10 / max_load

    return loaded_links.explore(
        color="red",
        style_kwds={

```

(continues on next page)

(continued from previous page)

```

        "style_function": lambda x: {
            "weight": x["properties"]["tot"] * factor,
        }
    },
)

```

And plot our data!

```

map = plot_results(rc.get_load_results()["demand"])
subarea_zone.add_to(map)
map

```

### Sub-area further preparation

It's useful later on to know which links from the network cross our polygon.

```

links = project.network.links.data
inner_links = links[links.crosses(poly.boundary)].sort_index()
inner_links.head()

```

As well as which nodes are interior.

```

nodes = project.network.nodes.data.set_index("node_id")
inside_nodes = nodes.sjoin(zones, how="inner").sort_index()
inside_nodes.head()

```

Let's filter those network links to graph links, dropping any dead ends and creating a *link\_id, dir* multi-index.

```

g = (
    graph.graph.set_index("link_id")
    .loc[inner_links.link_id]
    .drop(graph.dead_end_links, errors="ignore")
    .reset_index()
    .set_index(["link_id", "direction"])
)
g.head()

```

Here we'll quickly visualise what our sub-area is looking like. We'll plot the polygon from our zoning system and the links that it cuts.

```

map = inner_links.explore(color="red", style_kwds={"weight": 4})
subarea_zone.add_to(map)
map

```

### Manual sub-area analysis

Here we'll construct and use the Route Choice class to generate our route sets,

In order to perform our analysis we need to know what OD pairs have flow that enters and/or exists our polygon. To do so we perform a select link analysis on all links and pairs of links that cross the boundary. We create them as tuples of tuples to make represent the select link AND sets.

```
edge_pairs = {x: (x,) for x in itertools.permutations(g.index, r=2)}
single_edges = {x: ((x,)), for x in g.index}
f"Created: {len(edge_pairs)} edge pairs from {len(single_edges)} edges"
```

Let's prepare our graph once again

```
project.network.build_graphs()
graph = project.network.graphs["c"]
graph.network = graph.network.assign(utility=graph.network.distance * theta)
graph.prepare_graph(graph.centroids)
graph.set_graph("utility")
graph.set_blocked_centroid_flows(False)
```

This object construction might take a minute depending on the size of the graph due to the construction of the compressed link to network link mapping that's required. This is a one time operation per graph and is cached. We need to supply a Graph and an AequilibræMatrix or DataFrame via the `add_demand` method, if demand is not provided link loading cannot be performed.

```
rc = RouteChoice(graph)
rc.add_demand(mat)
```

Here we add the union of edges as select link sets.

```
rc.set_select_links(single_edges | edge_pairs)
```

For the sake of demonstration we limit out demand matrix to a few OD pairs. This filter is also possible with the automated approach, just edit the `subarea.rc.demand.df` DataFrame, however make sure the index remains intact.

```
ods_pairs_of_interest = [
    (4, 39),
    (92, 37),
    (31, 58),
    (4, 19),
    (39, 34),
]
ods_pairs_of_interest = ods_pairs_of_interest + [(x[1], x[0]) for x in ods_pairs_of_
↪interest]
rc.demand.df = rc.demand.df.loc[ods_pairs_of_interest].sort_index().astype(np.float32)
rc.demand.df
```

Perform the assignment

```
rc.set_choice_set_generation("lp", max_routes=3, penalty=1.02, store_results=False, ↪
↪seed=123)
rc.execute(perform_assignment=True)
```

We can visualise the current links loads

```
map = plot_results(rc.get_load_results()["demand"])
subarea_zone.add_to(map)
map
```

We'll pull out just OD matrix results as well we need it for the post-processing, we'll also convert the sparse matrices to SciPy COO matrices.

```
sl_od = rc.get_select_link_od_matrix_results()
edge_totals = {k: sl_od[k]["demand"].to_scipy() for k in single_edges}
edge_pair_values = {k: sl_od[k]["demand"].to_scipy() for k in edge_pairs}
```

For the post processing, we are interested in the demand of OD pairs that enter or exit the sub-area, or do both. For the single enters and exists we can extract that information from the single link select link results. We also need to map the links that cross the boundary to the origin/destination node and the node that appears on the outside of the sub-area.

```
from collections import defaultdict

entered = defaultdict(float)
exited = defaultdict(float)
for (link_id, dir), v in edge_totals.items():
    link = g.loc[link_id, dir]
    for (o, d), load in v.todok().items():
        o = graph.all_nodes[o]
        d = graph.all_nodes[d]

        o_inside = o in inside_nodes.index
        d_inside = d in inside_nodes.index

        if o_inside and not d_inside:
            exited[o, graph.all_nodes[link.b_node]] += load
        elif not o_inside and d_inside:
            entered[graph.all_nodes[link.a_node], d] += load
        elif not o_inside and not d_inside:
            pass
```

Here he have the load that entered the sub-area

```
entered
```

and the load that exited the sub-area

```
exited
```

To find the load that both entered and exited we can look at the edge pair select link results.

```
through = defaultdict(float)
for (l1, l2), v in edge_pair_values.items():
    link1 = g.loc[l1]
    link2 = g.loc[l2]

    for (o, d), load in v.todok().items():
        o_inside = o in inside_nodes.index
        d_inside = d in inside_nodes.index

        if not o_inside and not d_inside:
            through[graph.all_nodes[link1.a_node], graph.all_nodes[link2.b_node]] +=
↪load

through
```

With these results we can construct a new demand matrix. Usually this would be now transplanted onto another network,

however for demonstration purposes we'll reuse the same network.

```
demand = pd.DataFrame(
    list(entered.values()) + list(exited.values()) + list(through.values()),
    index=pd.MultiIndex.from_tuples(
        list(entered.keys()) + list(exited.keys()) + list(through.keys()), names=[
↪ "origin id", "destination id"]
    ),
    columns=["demand"],
).sort_index()
demand.head()
```

We'll re-prepare our graph but with our new “external” ODs.

```
new_centroids = np.unique(demand.reset_index()[["origin id", "destination id"]].to_
↪ numpy().reshape(-1))
graph.prepare_graph(new_centroids)
graph.set_graph("utility")
new_centroids
```

Re-perform our assignment

```
rc = RouteChoice(graph)
rc.add_demand(demand)
rc.set_choice_set_generation("lp", max_routes=3, penalty=1.02, store_results=False, ↪
↪ seed=123)
rc.execute(perform_assignment=True)
```

And plot the link loads for easy viewing

```
map = plot_results(rc.get_load_results()["demand"])
subarea_zone.add_to(map)
map
```

```
project.close()
```

## 9.4 References



## OTHER APPLICATIONS

In this section, we bring some of AequilibraE's applications that do not match a specific subject.

### 10.1 Examples

#### 10.1.1 Other applications

##### Creating Delaunay Lines

In this example, we show how to create AequilibraE's famous Delaunay Lines, but in Python.

For more on this topic, see its [first publication](#).

We use the Sioux Falls example once again.

##### See also

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.utils.create_delaunay_network.DelaunayAnalysis()`

```
# Imports
import pandas as pd
from uuid import uuid4
from os.path import join
import sqlite3
from tempfile import gettempdir
from geopandas import read_postgis

from aequilibrae.utils.create_example import create_example
from aequilibrae.utils.create_delaunay_network import DelaunayAnalysis
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

project = create_example(fldr)
```

Get the Delaunay Lines generation class

```
da = DelaunayAnalysis(project)
```

(continues on next page)

(continued from previous page)

```
# Let's create the triangulation based on the zones, but we could create based on the_
↳network (centroids) too
da.create_network("zones")
```

Now we get the matrix we want and create the Delaunay Lines

```
demand = project.matrices.get_matrix("demand_omx")
demand.computational_view(["matrix"])
```

And we will call it 'delaunay\_test'./ It will also be saved in the results\_database.sqlite

```
da.assign_matrix(demand, "delaunay_test")
```

we retrieve the results

```
conn = sqlite3.connect(join(fldr, "results_database.sqlite"))
results = pd.read_sql("Select * from delaunay_test", conn).set_index("link_id")
```

Now we get the matrix we want and create the Delaunay Lines

```
with project.db_connection as conn:
    links = read_postgis(
        "Select link_id, st_asBinary(geometry) geometry from delaunay_network",
        conn,
        geom_col="geometry",
        crs=4326
    )
    links.set_index("link_id", inplace=True)

df = links.join(results)

max_vol = df.matrix_tot.max()

df.plot(linewidth=4 * df["matrix_tot"] / max_vol, color="blue")
```

Close the project

```
project.close()
```

### Create a zone system based on Hex Bins

In this example, we show how to create hex bin zones covering an arbitrary area.

We also add centroid connectors and a special generator zone to our network to make it a pretty complete example.

We use the Nauru example to create roughly 100 zones covering the whole modeling area as delimited by the entire network.

You are obviously welcome to create whatever zone system you would like, as long as you have the geometries for them. In that case, you can just skip the hex bin computation part of this notebook.

#### References

- *Accessing project zones*

**See also**

Several functions, methods, classes and modules are used in this example:

- `aequilibrae.project.Zoning()`
- `aequilibrae.project.network.Nodes()`

```
# Imports
from uuid import uuid4
from tempfile import gettempdir
from os.path import join
from math import sqrt
from shapely.geometry import Point
import shapely.wkb

from aequilibrae.utils.create_example import create_example, list_examples
from aequilibrae.utils.aeq_signal import simple_progress, SIGNAL
s = SIGNAL(object)
```

Let's print the list of examples that ship with AequilibraE

```
print(list_examples())
```

```
# We create an empty project on an arbitrary folder
fldr = join(gettempdir(), uuid4().hex)

# Let's use the Nauru example project for display
project = create_example(fldr, "nauru")
```

We said we wanted 100 zones

```
zones = 100
```

**Hex Bins using Spatialite**

Spatialite requires a few things to compute hex bins. One of them is the area you want to cover.

```
network = project.network
```

So we use the convenient network method `convex_hull()` (it may take some time for very large networks)

```
geo = network.convex_hull()
```

The second thing is the side of the hex bin, which we can compute from its area. The approximate area of the desired hex bin is

```
zone_area = geo.area / zones
```

Since the area of the hexagon is  $\frac{3\sqrt{3}}{2} * side^2$  the side is equal to  $\sqrt{\frac{2\sqrt{3}*area}{9}}$

```
zone_side = sqrt(2 * sqrt(3) * zone_area / 9)
```

## AequilibraE 1.4.1

Now we can run an SQL query to compute the hexagonal grid. There are many ways to create hex bins (including with a GUI on QGIS), but we find that using SpatiaLite is a pretty neat solution, for which we will use the entire network bounding box to make sure we cover everything.

```
extent = network.extent()
```

```
b = extent.bounds
sql = "select st_asbinary(HexagonalGrid(GeomFromWKB(?), ?, 0, GeomFromWKB(?)))"
with project.db_connection as conn:
    grid = conn.execute(sql, [extent.wkb, zone_side, Point(b[2], b[3]).wkb]).
    ↪fetchone()[0]
    grid = shapely.wkb.loads(grid)
```

Since we used the bounding box, we have way more zones than we wanted, so we clean them by only keeping those that intersect the network convex hull.

```
grid = [p for p in grid.geoms if p.intersects(geo)]
```

Let's re-number all nodes with IDs smaller than 300 to something bigger as to free space to our centroids to go from 1 to N.

```
nodes = network.nodes
for i in range(1, 301):
    nd = nodes.get(i)
    nd.renumber(i + 1300)
```

```
# Now we can add them to the model and add centroids to them while we are at it.
zoning = project.zoning
for i, zone_geo in enumerate(simple_progress(grid, s, "Add zone centroids")):
    zone = zoning.new(i + 1)
    zone.geometry = zone_geo
    zone.save()
    # None means that the centroid will be added in the geometric point of the zone
    # But we could provide a Shapely point as an alternative
    zone.add_centroid(None)
```

## Centroid connectors

Let's connect our zone centroids to the network.

```
for zone_id, zone in zoning.all_zones().items():
    # We will connect for walk, with 1 connector per zone
    zone.connect_mode(mode_id="w", connectors=1)

    # And for cars, for cars with 2 connectors per zone
    # We also specify the link types we accept to connect to (can be used to avoid_
    ↪connection to ramps or freeways)
    zone.connect_mode(mode_id="c", link_types="ytrusP", connectors=2)

    # This takes a few minutes to compute, so we will break after processing the_
    ↪first 10 zones
    if zone_id >= 10:
        break
```

## Special generator zones

Let's add a special generator zone by adding a centroid at the airport terminal.

Let's use some silly number for its ID, like 10,000, just so we can easily differentiate it

```
airport = nodes.new_centroid(10000)
airport.geometry = Point(166.91749582, -0.54472590)
airport.save()
```

When connecting a centroid not associated with a zone, we need to tell AequilibraE what is the initial area around the centroid that needs to be considered when looking for candidate nodes.

```
airport.connect_mode(mode_id="c", link_types="ytrusP", connectors=1)
```

```
project.close()
```



## 11.1 Project

---

*Project()*

AequilibraE project class

---

### 11.1.1 `aequilibrae.project.Project`

**class** `aequilibrae.project.Project`  
AequilibraE project class

Listing 1: Create Project

```
>>> new_project = Project()
>>> new_project.new(project_path)
```

Listing 2: Open Project

```
>>> existing_project = Project()
>>> existing_project.open(project_path)
```

`__init__()`

#### Methods

---

<code>__init__()</code>	
<code>activate()</code>	
<code>check_file_indices()</code>	Makes results_database.sqlite and the matrices folder compatible with project database
<code>close()</code>	Safely closes the project
<code>deactivate()</code>	
<code>from_path(project_folder)</code>	
<code>log()</code>	Returns a log object
<code>new(project_path)</code>	Creates a new project
<code>open(project_path)</code>	Loads project from disk
<code>upgrade()</code>	Find and apply all applicable migrations.

---

## Attributes

<code>db_connection</code>	
<code>parameters</code>	
<code>project_parameters</code>	
<code>run</code>	Load and return the AequibraE run module with the default arguments from <code>parameters.yml</code> partially applied.
<code>zoning</code>	

**activate()**

**check\_file\_indices()** → None

Makes `results_database.sqlite` and the `matrices` folder compatible with project database

**close()** → None

Safely closes the project

**deactivate()**

**classmethod from\_path**(*project\_folder*)

**log()** → *Log*

Returns a log object

allows the user to read the log or clear it

**new**(*project\_path: str*) → None

Creates a new project

### Arguments

**project\_path** (`str`): Full path to the project data folder. If folder exists, it will fail

**open**(*project\_path: str*) → None

Loads project from disk

### Arguments

**project\_path** (`str`): Full path to the project data folder. If the project inside does not exist, it will fail.

**upgrade()**

Find and apply all applicable migrations.

All database upgrades are applied within a single transaction.

If skipping a specific migration is required, use the `aequilbrae.project.tools.MigrationManager` object directly. Consult it's documentation page for details. Take care when skipping migrations.

**property db\_connection**

**property parameters:** `dict`

**property project\_parameters:** *Parameters*

**property run**

Load and return the AequilibraE run module with the default arguments from `parameters.yml` partially applied.

Refer to `run/__init__.py` file within the project folder for documentation.

**property zoning**

## 11.1.2 Project Components

<code>About(project)</code>	Provides an interface for querying and editing the <b>about</b> table of an AequilibraE project
<code>FieldEditor(project, table_name)</code>	Allows user to edit the project data tables
<code>Log(project_base_path)</code>	API entry point to the log file contents
<code>Matrices(project)</code>	Gateway into the matrices available/recorded in the model
<code>Network(project)</code>	Network class.
<code>Zoning(network)</code>	Access to the API resources to manipulate the 'zones' table in the project

### aequilibrae.project.About

**class** `aequilibrae.project.About` (*project*)

Provides an interface for querying and editing the **about** table of an AequilibraE project

```
>>> project = create_example(project_path)

# Adding a new field and saving it
>>> project.about.add_info_field('my_super_relevant_field')
>>> project.about.my_super_relevant_field = 'super relevant information'
>>> project.about.write_back()

# changing the value for an existing value/field
>>> project.about.scenario_name = 'Just a better scenario name'
>>> project.about.write_back()
```

`__init__` (*project*)

### Methods

<code>__init__(project)</code>	
<code>add_info_field(info_field)</code>	Adds new information field to the model
<code>create()</code>	Creates the 'about' table for project files that did not previously contain it
<code>list_fields()</code>	Returns a list of all characteristics the about table holds
<code>write_back()</code>	Saves the information parameters back to the project database

**add\_info\_field** (*info\_field: str*) → None

Adds new information field to the model

**Arguments**

**info\_field** (`str`): Name of the desired information field to be added. Has to be a valid Python VARIABLE name (i.e. letter as first character, no spaces and no special characters)

```
>>> project = create_example(project_path)

>>> project.about.add_info_field('a_cool_field')
>>> project.about.a_cool_field = 'super relevant information'
>>> project.about.write_back()
```

**create()**

Creates the 'about' table for project files that did not previously contain it

**list\_fields()** → list

Returns a list of all characteristics the about table holds

**write\_back()**

Saves the information parameters back to the project database

```
>>> project = create_example(project_path)

>>> project.about.description = 'This is the example project. Do not use for_
↳forecast'
>>> project.about.write_back()
```

**aequilibrae.project.FieldEditor**

**class** `aequilibrae.project.FieldEditor` (*project*, *table\_name: str*)

Allows user to edit the project data tables

The field editor is used for two different purposes:

- Managing data tables (adding and removing fields)
- Editing the tables' metadata (description of each field)

This is a general class used to manage all project's data tables accessible to the user and but it should be accessed directly from within the module corresponding to the data table one wants to edit. Example:

```
>>> project = create_example(project_path)

# To edit the fields of the link_types table
>>> lt_fields = project.network.link_types.fields

# To edit the fields of the modes table
>>> m_fields = project.network.modes.fields
```

Field descriptions are kept in the table *attributes\_documentation*

**\_\_init\_\_** (*project*, *table\_name: str*) → None

## Methods

<code>__init__(project, table_name)</code>	
<code>add(field_name, description[, data_type])</code>	Adds new field to the data table
<code>all_fields()</code>	Returns the list of fields available in the database
<code>remove(field_name)</code>	
<code>save()</code>	Saves any field descriptions which may have been changed to the database

**add** (*field\_name*: str, *description*: str, *data\_type*='NUMERIC') → None

Adds new field to the data table

### Arguments

**field\_name** (str): Field to be added to the table. Must be a valid SQLite field name

**description** (str): Description of the field to be inserted in the metadata

**data\_type** (str, *Optional*): Valid SQLite Data type. Default: "NUMERIC"

**all\_fields** () → List[str]

Returns the list of fields available in the database

**remove** (*field\_name*: str) → None

**save** () → None

Saves any field descriptions which may have been changed to the database

## aequilibrae.project.Log

**class** `aequilibrae.project.Log` (*project\_base\_path*: Path)

API entry point to the log file contents

```
>>> project = Project()
>>> project.new(project_path)

>>> log = project.log()

# We get all entries for the log file
>>> entries = log.contents()

# Or clear everything (NO UN-DOs)
>>> log.clear()
```

`__init__` (*project\_base\_path*: Path)

## Methods

<code>__init__(project_base_path)</code>	
<code>clear()</code>	Clears the log file.
<code>contents()</code>	Returns contents of log file

**clear()**

Clears the log file. Use it wisely

**contents()** → list

Returns contents of log file

**Returns**

**log\_contents** (list): List with all entries in the log file

## aequilibrae.project.Matrices

**class** `aequilibrae.project.Matrices` (*project*)

Gateway into the matrices available/recorded in the model

**\_\_init\_\_** (*project*)

### Methods

<code>__init__(project)</code>	
<code>check_exists(name)</code>	Checks whether a matrix with a given name exists
<code>clear_database()</code>	Removes records from the matrices database that do not exist in disk
<code>delete_record(matrix_name)</code>	Deletes a Matrix Record from the model and attempts to remove from disk
<code>get_matrix(matrix_name)</code>	Returns an AequibraE matrix available in the project
<code>get_record(matrix_name)</code>	Returns a model Matrix Record for manipulation in memory
<code>list()</code>	List of all matrices available
<code>new_record(name, file_name[, matrix])</code>	Creates a new record for a matrix in disk, but does not save it
<code>reload()</code>	Discards all memory matrices in memory and loads recreate them
<code>update_database()</code>	Adds records to the matrices database for matrix files found on disk

**check\_exists** (*name: str*) → bool

Checks whether a matrix with a given name exists

**Returns**

**exists** (bool): Does the matrix exist?

**clear\_database** () → None

Removes records from the matrices database that do not exist in disk

**delete\_record** (*matrix\_name: str*) → None

Deletes a Matrix Record from the model and attempts to remove from disk

**get\_matrix** (*matrix\_name: str*) → *AequibraeMatrix*

Returns an AequibraE matrix available in the project

Raises an error if matrix does not exist

**Arguments**

**matrix\_name** (str): Name of the matrix to be loaded

**Returns****matrix** (AequilibraeMatrix): Matrix object**get\_record** (*matrix\_name: str*) → MatrixRecord

Returns a model Matrix Record for manipulation in memory

**list** () → DataFrame

List of all matrices available

**Returns****df** (pd.DataFrame): Pandas DataFrame listing all matrices available in the model**new\_record** (*name: str, file\_name: str, matrix=None*) → MatrixRecord

Creates a new record for a matrix in disk, but does not save it

If the matrix file is not already on disk, it will fail

**Arguments****name** (str): Name of the matrix**file\_name** (str): Name of the file on disk**Returns****matrix\_record** (MatrixRecord): A matrix record that can be manipulated in memory before saving**reload** ()

Discards all memory matrices in memory and loads recreate them

**update\_database** () → None

Adds records to the matrices database for matrix files found on disk

**aequilibrae.project.Network****class** aequilibrae.project.Network (*project*)

Network class. Member of an AequilibraE Project

**\_\_init\_\_** (*project*) → None

## Methods

<code>__init__(project)</code>	
<code>build_graphs([fields, modes, limit_to_area])</code>	Builds graphs for all modes currently available in the model
<code>convex_hull()</code>	Queries the model for the convex hull of the entire network
<code>count_centroids()</code>	Returns the number of centroids in the model
<code>count_links()</code>	Returns the number of links in the model
<code>count_nodes()</code>	Returns the number of nodes in the model
<code>create_from_gmns(link_file_path, node_file_path)</code>	Creates AequilibraE model from links and nodes in GMNS format.
<code>create_from_osm([model_area, place_name, ...])</code>	Downloads the network from OpenStreetMap (OSM)
<code>export_to_gmns(path)</code>	Exports AequilibraE network to csv files in GMNS format.
<code>extent()</code>	Queries the extent of the network included in the model
<code>list_modes()</code>	Returns a list of all the modes in this model
<code>set_time_field(time_field)</code>	Set the time field for all graphs built in the model
<code>skimmable_fields()</code>	Returns a list of all fields that can be skimmed

## Attributes

<code>link_types</code>
<code>protected_fields</code>
<code>req_link_flds</code>
<code>req_node_flds</code>
<code>signal</code>

**build\_graphs** (*fields: list | None = None, modes: list | None = None, limit\_to\_area: Polygon | None = None*) → None

Builds graphs for all modes currently available in the model

When called, it overwrites all graphs previously created and stored in the networks' dictionary of graphs

### Arguments

**fields** (*list, Optional*): When working with very large graphs with large number of fields in the database, it may be useful to specify which fields to use

**modes** (*list, Optional*): When working with very large graphs with large number of fields in the database, it may be useful to generate only those we need

**limit\_to\_area** (*Polygon, Optional*): When working with a very large model area, you may want to filter your database to a small area for your computation, which you can do by providing a polygon. The search is limited to a spatial index search, so it is very fast but NOT PRECISE.

To use the 'fields' parameter, a minimalistic option is the following

```

>>> project = create_example(project_path)

>>> fields = ['distance']
>>> project.network.build_graphs(fields, modes = ['c', 'w'])

```

**convex\_hull()** → Polygon

Queries the model for the convex hull of the entire network

**Returns**

**model coverage** (Polygon): Shapely (Multi)polygon of the model network.

**count\_centroids()** → int

Returns the number of centroids in the model

**Returns**

int: Number of centroids

**count\_links()** → int

Returns the number of links in the model

**Returns**

int: Number of links

**count\_nodes()** → int

Returns the number of nodes in the model

**Returns**

int: Number of nodes

**create\_from\_gmns** (*link\_file\_path: str, node\_file\_path: str, use\_group\_path: str | None = None, geometry\_path: str | None = None, srid: int = 4326*) → None

Creates AequilibraE model from links and nodes in GMNS format.

**Arguments**

**link\_file\_path** (str): Path to a links csv file in GMNS format

**node\_file\_path** (str): Path to a nodes csv file in GMNS format

**use\_group\_path** (str, *Optional*): Path to a csv table containing groupings of uses. This helps AequilibraE know when a GMNS use is actually a group of other GMNS uses

**geometry\_path** (str, *Optional*): Path to a csv file containing geometry information for a line object, if not specified in the link table

**srid** (int, *Optional*): Spatial Reference ID in which the GMNS geometries were created

**create\_from\_osm** (*model\_area: Polygon | None = None, place\_name: str | None = None, modes=('car', 'transit', 'bicycle', 'walk'), clean=True*) → None

Downloads the network from OpenStreetMap (OSM)

**Arguments**

**area** (Polygon, *Optional*): Polygon for which the network will be downloaded. If not provided, a place name would be required

**place\_name** (str, *Optional*): If not downloading with East-West-North-South boundingbox, this is required

**modes** (tuple, *Optional*): List of all modes to be downloaded. Defaults to the modes in the parameter file

**clean** (*bool, Optional*): Keeps only the links that intersects the model area polygon. Defaults to True. Does not apply to networks downloaded with a place name

```
>>> project = Project()
>>> project.new(project_path)

# Now we can import the network for any place we want
>>> project.network.create_from_osm(place_name="my_beautiful_hometown")

>>> project.close()
```

**export\_to\_gmns** (*path: str*)

Exports AequilibraE network to csv files in GMNS format.

#### Arguments

**path** (*str*): Output folder path.

**extent** ()

Queries the extent of the network included in the model

#### Returns

**model extent** (*Polygon*): Shapely polygon with the bounding box of the model network.

**list\_modes** ()

Returns a list of all the modes in this model

#### Returns

*list*: List of all modes

**set\_time\_field** (*time\_field: str*) → None

Set the time field for all graphs built in the model

#### Arguments

**time\_field** (*str*): Network field with travel time information

**skimmable\_fields** ()

Returns a list of all fields that can be skimmed

#### Returns

*list*: List of all fields that can be skimmed

**link\_types**: *LinkTypes* = None

**protected\_fields** = ['ogc\_fid', 'geometry']

**req\_link\_flds** = ['link\_id', 'a\_node', 'b\_node', 'direction', 'distance', 'modes', 'link\_type']

**req\_node\_flds** = ['node\_id', 'is\_centroid']

**signal** = <aequilibrae.utils.python\_signal.PythonSignal object>

## aequilibrae.project.Zoning

**class** aequilibrae.project.Zoning (*network*)

Access to the API resources to manipulate the 'zones' table in the project

```

>>> project = create_example(project_path, "coquimbo")

>>> zoning = project.zoning

>>> zone_downtown = zoning.get(1)
>>> zone_downtown.population = 637
>>> zone_downtown.employment = 10039
>>> zone_downtown.save()

# We can also add one more field to the table
>>> fields = zoning.fields
>>> fields.add('parking_spots', 'Total licensed parking spots', 'INTEGER')

```

`__init__(network)`

## Methods

<code>__init__(network)</code>	
<code>add_centroids([robust])</code>	Adds automatic centroids to the network file.
<code>all_zones()</code>	Returns a dictionary with all Zone objects available in the model, using <code>zone_id</code> as key
<code>connect_mode(mode_id[, link_types, ...])</code>	Adds centroid connectors for the desired mode to the network file
<code>coverage()</code>	Returns a single polygon for the entire zoning coverage
<code>create_zoning_layer()</code>	Creates the 'zones' table for project files that did not previously contain it
<code>extent()</code>	Queries the extent of the layer included in the model
<code>get(zone_id)</code>	Get a zone from the model by its <code>zone_id</code>
<code>get_closest_zone(geometry)</code>	Returns the zone in which the given geometry is located.
<code>new(zone_id)</code>	Creates a new zone
<code>refresh_geo_index()</code>	
<code>save()</code>	

## Attributes

<code>data</code>	Returns all zones data as a Pandas DataFrame
<code>fields</code>	Returns a FieldEditor class instance to edit the zones table fields and their metadata

**add\_centroids** (*robust=True*)

Adds automatic centroids to the network file. It adds centroids to all zones that do not have one. Centroid is added to the geographic centroid of the zone.

### Arguments

**robust** (`bool`, *Optional*): Moves the centroid location around to avoid node conflict. Defaults to `True`.

**all\_zones** () → dict

Returns a dictionary with all Zone objects available in the model, using `zone_id` as key

**connect\_mode** (*mode\_id: str, link\_types="", connectors=1, limit\_to\_zone=True*)

Adds centroid connectors for the desired mode to the network file

Centroid connectors are created by connecting each zone centroid to one or more nodes selected from all those that satisfy the mode and link\_types criteria and are inside the zone.

The selection of the nodes that will be connected is done simply by searching for the node closest to each zone centroid, or the N closest nodes to the centroid.

If fewer candidates than required connectors are found, all candidates are connected.

CENTROIDS THAT ARE CURRENTLY CONNECTED ARE SKIPPED ALTOGETHER

#### Arguments

**mode\_id** (*str*): Mode ID we are trying to connect

**link\_types** (*str, Optional*): String with all the link type IDs that can be considered. eg: yCdR.  
Defaults to ALL link types

**connectors** (*int, Optional*): Number of connectors to add. Defaults to 1

**limit\_to\_zone** (*bool*): Limits the search for nodes inside the zone. Defaults to True.

**coverage** () → Polygon

Returns a single polygon for the entire zoning coverage

#### Returns

**model coverage** (*Polygon*): Shapely (Multi)polygon of the zoning system.

**create\_zoning\_layer** ()

Creates the 'zones' table for project files that did not previously contain it

**extent** () → Polygon

Queries the extent of the layer included in the model

#### Returns

**model extent** (*Polygon*): Shapely polygon with the bounding box of the layer.

**get** (*zone\_id: str*) → Zone

Get a zone from the model by its `zone_id`

**get\_closest\_zone** (*geometry: Point | LineString | MultiLineString*) → int

Returns the zone in which the given geometry is located.

If the geometry is not fully enclosed by any zone, the zone closest to the geometry is returned

#### Arguments

**geometry** (*Point or LineString*): A Shapely geometry object

#### Returns

**zone\_id** (*int*): ID of the zone applicable to the point provided

**new** (*zone\_id: int*) → Zone

Creates a new zone

#### Returns

**zone** (*Zone*): A new zone object populated only with `zone_id` (but not saved in the model yet)

`refresh_geo_index()`

`save()`

**property data:** `GeoDataFrame`

Returns all zones data as a Pandas DataFrame

**Returns**

**table** (`GeoDataFrame`): GeoPandas `GeoDataFrame` with all the nodes

**property fields:** `FieldEditor`

Returns a `FieldEditor` class instance to edit the zones table fields and their metadata

### 11.1.3 Project Objects

<code>Zone(dataset, zoning)</code>	Single zone object that can be queried and manipulated in memory
------------------------------------	--

#### `aequilibrae.project.Zone`

**class** `aequilibrae.project.Zone` (*dataset: dict, zoning*)

Single zone object that can be queried and manipulated in memory

`__init__` (*dataset: dict, zoning*)

#### Methods

<code>__init__(dataset, zoning)</code>	
<code>add_centroid(point[, robust])</code>	Adds a centroid to the network file
<code>connect_mode(mode_id[, link_types, ...])</code>	Adds centroid connectors for the desired mode to the network file
<code>delete()</code>	Removes the zone from the database
<code>disconnect_mode(mode_id)</code>	Removes centroid connectors for the desired mode from the network file
<code>save()</code>	Saves/Updates the zone data to the database

**add\_centroid** (*point: Point, robust=True*) → None

Adds a centroid to the network file

**Arguments**

**point** (`Point`): Shapely `Point` corresponding to the desired centroid position. If `None`, uses the geometric center of the zone

**robust** (`Bool`, *Optional*): Moves the centroid location around to avoid node conflict. Defaults to `True`.

**connect\_mode** (*mode\_id: str, link\_types="", connectors=1, conn: Connection | None = None, limit\_to\_zone=True*) → None

Adds centroid connectors for the desired mode to the network file

Centroid connectors are created by connecting the zone centroid to one or more nodes selected from all those that satisfy the mode and `link_types` criteria and are inside the zone.

The selection of the nodes that will be connected is done simply by searching for the node closest to the zone centroid, or the N closest nodes to the centroid.

If fewer candidates than required connectors are found, all candidates are connected.

**Arguments**

**mode\_id** (*str*): Mode ID we are trying to connect

**link\_types** (*str, Optional*): String with all the link type IDs that can be considered. eg: yCdR.  
Defaults to ALL link types

**connectors** (*int, Optional*): Number of connectors to add. Defaults to 1

**conn** (*sqlite3.Connection, Optional*): Connection to the database.

**limit\_to\_zone** (*bool*): Limits the search for nodes inside the zone. Defaults to `True`.

**delete** ()

Removes the zone from the database

**disconnect\_mode** (*mode\_id: str*) → None

Removes centroid connectors for the desired mode from the network file

**Arguments**

**mode\_id** (*str*): Mode ID we are trying to disconnect from this zone

**save** ()

Saves/Updates the zone data to the database

## 11.1.4 Project Tools

```
network_simplifier.  
NetworkSimplifier([project])
```

### aequilibrae.project.tools.network\_simplifier.NetworkSimplifier

**class** aequilibrae.project.tools.network\_simplifier.**NetworkSimplifier** (*project=None*)

**\_\_init\_\_** (*project=None*) → None

#### Methods

<code>__init__([project])</code>	
<code>collapse_links_into_nodes(links)</code>	Collapses links into nodes, adjusting the network in the neighborhood.
<code>rebuild_network()</code>	Rebuilds the network elements that would have to be rebuilt after massive network simplification
<code>simplify(graph[, max_speed_ratio])</code>	Simplifies the network by merging links that are shorter than a given threshold

#### Attributes

<code>signal</code>
---------------------

**collapse\_links\_into\_nodes** (*links*: List[int])

Collapses links into nodes, adjusting the network in the neighborhood.

**Arguments**

**links** (List[int]): List containing link IDs to be collapsed.

**rebuild\_network** ()

Rebuilds the network elements that would have to be rebuilt after massive network simplification

**simplify** (*graph*: Graph, *max\_speed\_ratio*: float = 1.1)

Simplifies the network by merging links that are shorter than a given threshold

**Arguments**

**graph** (Graph): AequilibraE graph

**max\_speed\_ratio** (float, *Optional*): Maximum ratio between the fastest and slowest speed for a link to be considered for simplification.

**signal** = <aequilibrae.utils.python\_signal.PythonSignal object>

## 11.2 Network Data

<i>Modes</i> (net)	Access to the API resources to manipulate the modes table in the network
<i>LinkTypes</i> (net)	Access to the API resources to manipulate the link_types table in the network.
<i>Links</i> (net)	Access to the API resources to manipulate the links table in the network
<i>Nodes</i> (net)	Access to the API resources to manipulate the nodes table in the network
<i>Periods</i> (net)	Access to the API resources to manipulate the periods table in the network

### 11.2.1 aequilibrae.project.network.Modes

**class** aequilibrae.project.network.**Modes** (*net*)

Access to the API resources to manipulate the modes table in the network

```
>>> project = create_example(project_path)
>>> modes = project.network.modes
# We can get a dictionary of all modes in the model
>>> all_modes = modes.all_modes()
# And do a bulk change and save it
>>> for mode_id, mode_obj in all_modes.items():
...     mode_obj.beta = 1
...     mode_obj.save()
# or just get one mode in specific
>>> car_mode = modes.get('c')
```

(continues on next page)

(continued from previous page)

```

# or just get this same mode by name
>>> car_mode = modes.get_by_name('car')

# We can change the description of the mode
>>> car_mode.description = 'personal autos only'

# Let's say we are using alpha to store the PCE for a future year with much
↳ smaller cars
>>> car_mode.alpha = 0.95

# To save this mode we can simply
>>> car_mode.save()

# We can also create a completely new mode and add to the model
>>> new_mode = modes.new('k')
>>> new_mode.mode_name = 'flying_car' # Only ASCII letters and *_* allowed #
↳ other fields are not mandatory

# We then explicitly add it to the network
>>> modes.add(new_mode)

# we can even keep editing and save it directly once we have added it to the
↳ project
>>> new_mode.description = 'this is my new description'
>>> new_mode.save()

```

`__init__(net)`

## Methods

<code>__init__(net)</code>	
<code>add(mode)</code>	We add a mode to the project
<code>all_modes()</code>	Returns a dictionary with all mode objects available in the model.
<code>delete(mode_id)</code>	Removes the mode with <code>mode_id</code> from the project
<code>get(mode_id)</code>	Get a mode from the network by its <code>mode_id</code>
<code>get_by_name(mode)</code>	Get a mode from the network by its <code>mode_name</code>
<code>new(mode_id)</code>	Returns a new mode with <code>mode_id</code> that can be added to the model later

## Attributes

<code>fields</code>	Returns a FieldEditor class instance to edit the Modes table fields and their metadata
---------------------	--

`add(mode: Mode) → None`

We add a mode to the project

**all\_modes** () → dict

Returns a dictionary with all mode objects available in the model. *mode\_id* as key

**delete** (*mode\_id: str*) → None

Removes the mode with *mode\_id* from the project

**get** (*mode\_id: str*) → *Mode*

Get a mode from the network by its *mode\_id*

**get\_by\_name** (*mode: str*) → *Mode*

Get a mode from the network by its *mode\_name*

**new** (*mode\_id: str*) → *Mode*

Returns a new mode with *mode\_id* that can be added to the model later

**property fields:** *FieldEditor*

Returns a *FieldEditor* class instance to edit the Modes table fields and their metadata

## 11.2.2 aequilibræ.project.network.LinkTypes

**class** aequilibræ.project.network.**LinkTypes** (*net*)

Access to the API resources to manipulate the *link\_types* table in the network.

```
>>> project = create_example(project_path)
>>> link_types = project.network.link_types

# We can get a dictionary of link types in the model
>>> all_link_types = link_types.all_types()

# And do a bulk change and save it
>>> for link_type_id, link_type_obj in all_link_types.items():
...     link_type_obj.beta = 1

# We can save changes for all link types in one go
>>> link_types.save()

# or just get one link_type in specific
>>> default_link_type = link_types.get('y')

# or just get it by name
>>> default_link_type = link_types.get_by_name('default')

# We can change the description of the link types
>>> default_link_type.description = 'My own new description'

# Let's say we are using alpha to store lane capacity during the night as 90% of
↳the standard
>>> default_link_type.alpha = 0.9 * default_link_type.lane_capacity

# To save this link types we can simply
>>> default_link_type.save()

# We can also create a completely new link_type and add to the model
```

(continues on next page)

(continued from previous page)

```

>>> new_type = link_types.new('a')
>>> new_type.link_type = 'Arterial' # Only ASCII letters and *_* allowed # other_
↳fields are not mandatory

# We then save it to the database
>>> new_type.save()

# we can even keep editing and save it directly once we have added it to the_
↳project
>>> new_type.lanes = 3
>>> new_type.lane_capacity = 1100
>>> new_type.save()

```

`__init__(net)`

## Methods

<code>__init__(net)</code>	
<code>all_types()</code>	Returns a dictionary with all LinkType objects available in the model.
<code>delete(link_type_id)</code>	Removes the link_type with <i>link_type_id</i> from the project
<code>get(link_type_id)</code>	Get a link_type from the network by its <i>link_type_id</i>
<code>get_by_name(link_type)</code>	Get a link_type from the network by its <i>link_type</i> (i.e. name).
<code>new(link_type_id)</code>	
<code>save()</code>	

## Attributes

<code>fields</code>	Returns a FieldEditor class instance to edit the Link_Types table fields and their metadata
---------------------	---

**all\_types** () → dict

Returns a dictionary with all LinkType objects available in the model. *link\_type\_id* as key

**delete** (*link\_type\_id: str*) → None

Removes the link\_type with *link\_type\_id* from the project

**get** (*link\_type\_id: str*) → LinkType

Get a link\_type from the network by its *link\_type\_id*

**get\_by\_name** (*link\_type: str*) → LinkType

Get a link\_type from the network by its *link\_type* (i.e. name)

**new** (*link\_type\_id: str*) → LinkType

```
save()
```

**property fields:** *FieldEditor*

Returns a FieldEditor class instance to edit the Link\_Types table fields and their metadata

### 11.2.3 aequilibrae.project.network.Links

**class** aequilibrae.project.network.Links (*net*)

Access to the API resources to manipulate the links table in the network

```
>>> project = create_example(project_path)
>>> all_links = project.network.links
# We can just get one link in specific
>>> link = all_links.get(1)
# We can save changes for all links we have edited so far
>>> all_links.save()
```

**\_\_init\_\_** (*net*)

#### Methods

<code>__init__(net)</code>	
<code>copy_link(link_id)</code>	Creates a copy of a link with a new id
<code>delete(link_id)</code>	Removes the link with link_id from the project
<code>extent()</code>	Queries the extent of the layer included in the model
<code>get(link_id)</code>	Get a link from the network by its <i>link_id</i>
<code>new()</code>	Creates a new link
<code>refresh()</code>	Refreshes all the links in memory
<code>refresh_fields()</code>	After adding a field one needs to refresh all the fields recognized by the software
<code>save()</code>	

#### Attributes

<code>data</code>	Returns all links data as a Pandas DataFrame
<code>fields</code>	Returns a FieldEditor class instance to edit the zones table fields and their metadata
<code>sql</code>	Query sql for retrieving links

**copy\_link** (*link\_id: int*) → *Link*

Creates a copy of a link with a new id

It raises an error if link\_id does not exist

#### Arguments

**link\_id** (*int*): Id of the link to copy

**Returns****link** (*Link*): Link object for requested link\_id**delete** (*link\_id: int*) → None

Removes the link with link\_id from the project

**Arguments****link\_id** (*int*): Id of a link to delete**extent** () → Polygon

Queries the extent of the layer included in the model

**Returns****model extent** (*Polygon*): Shapely polygon with the bounding box of the layer.**get** (*link\_id: int*) → *Link*Get a link from the network by its *link\_id*

It raises an error if link\_id does not exist

**Arguments****link\_id** (*int*): Id of a link to retrieve**Returns****link** (*Link*): Link object for requested link\_id**new** () → *Link*

Creates a new link

**Returns****link** (*Link*): A new link object populated only with link\_id (not saved in the model yet)**refresh** ()

Refreshes all the links in memory

**refresh\_fields** () → None

After adding a field one needs to refresh all the fields recognized by the software

**save** ()**property data**: *GeoDataFrame*

Returns all links data as a Pandas DataFrame

**Returns****table** (*GeoDataFrame*): GeoPandas GeoDataFrame with all the nodes**property fields**: *FieldEditor*

Returns a FieldEditor class instance to edit the zones table fields and their metadata

**sql** = ''

Query sql for retrieving links

## 11.2.4 aequibrae.project.network.Nodes

**class** aequibrae.project.network.**Nodes** (*net*)

Access to the API resources to manipulate the nodes table in the network

```

>>> project = create_example(project_path)

>>> all_nodes = project.network.nodes

# We can just get one link in specific
>>> node = all_nodes.get(21)

# We can save changes for all nodes we have edited so far
>>> all_nodes.save()

```

`__init__(net)`

## Methods

<code>__init__(net)</code>	
<code>extent()</code>	Queries the extent of the layer included in the model
<code>get(node_id)</code>	Get a node from the network by its <code>node_id</code>
<code>new_centroid(node_id)</code>	Creates a new centroid with a given ID
<code>refresh()</code>	Refreshes all the nodes in memory
<code>refresh_fields()</code>	After adding a field one needs to refresh all the fields recognized by the software
<code>save()</code>	

## Attributes

<code>data</code>	Returns all nodes data as a Pandas DataFrame
<code>fields</code>	Returns a FieldEditor class instance to edit the zones table fields and their metadata
<code>lonlat</code>	Returns all nodes lon/lat coords as a Pandas DataFrame
<code>sql</code>	Query sql for retrieving nodes

`extent ()` → Polygon

Queries the extent of the layer included in the model

### Returns

**model extent** (Polygon): Shapely polygon with the bounding box of the layer.

`get (node_id: int)` → Node

Get a node from the network by its `node_id`

It raises an error if `node_id` does not exist

### Arguments

**node\_id** (int): ID of a node to retrieve

### Returns

**node** (Node): Node object for requested `node_id`

`new_centroid (node_id: int)` → Node

Creates a new centroid with a given ID

**Arguments****node\_id** (int): ID of the centroid to be created**refresh** ()

Refreshes all the nodes in memory

**refresh\_fields** () → None

After adding a field one needs to refresh all the fields recognized by the software

**save** ()**property data**: **GeoDataFrame**

Returns all nodes data as a Pandas DataFrame

**Returns****table** (GeoDataFrame): GeoPandas GeoDataFrame with all the nodes**property fields**: *FieldEditor*

Returns a FieldEditor class instance to edit the zones table fields and their metadata

**property lonlat**: **DataFrame**

Returns all nodes lon/lat coords as a Pandas DataFrame

**Returns****table** (DataFrame): Pandas DataFrame with all the nodes, with geometry as lon/lat**sql** = ''

Query sql for retrieving nodes

## 11.2.5 aequibrae.project.network.Periods

**class** aequibrae.project.network.**Periods** (*net*)

Access to the API resources to manipulate the periods table in the network

```
>>> project = create_example(project_path, "coquimbo")
>>> all_periods = project.network.periods
# We can just get one link in specific
>>> period = all_periods.get(1)
# We can save changes for all periods we have edited so far
>>> all_periods.save()
```

**\_\_init\_\_** (*net*)

## Methods

<code>__init__(net)</code>	
<code>extent()</code>	Queries the extent of the layer included in the model
<code>get(period_id)</code>	Get a period from the network by its <b>period_id</b>
<code>new_period(period_id, start, end[, description])</code>	Creates a new period with a given ID
<code>refresh()</code>	Refreshes all the periods in memory
<code>refresh_fields()</code>	After adding a field one needs to refresh all the fields recognized by the software
<code>save()</code>	

## Attributes

<code>data</code>	Returns all periods data as a Pandas DataFrame
<code>default_period</code>	
<code>fields</code>	Returns a FieldEditor class instance to edit the zones table fields and their metadata
<code>sql</code>	Query sql for retrieving periods

### `extent()`

Queries the extent of the layer included in the model

#### Returns

**model extent** (`Polygon`): Shapely polygon with the bounding box of the layer.

### `get(period_id: int) → Period`

Get a period from the network by its **period\_id**

It raises an error if `period_id` does not exist

#### Arguments

**period\_id** (`int`): Id of a period to retrieve

#### Returns

**period** (`Period`): Period object for requested `period_id`

### `new_period(period_id: int, start: int, end: int, description: str | None = None) → Period`

Creates a new period with a given ID

#### Arguments

**period\_id** (`int`): Id of the centroid to be created

**start** (`int`): Start time of the period to be created

**end** (`int`): End time of the period to be created

**description** (`str`): Optional human readable description of the time period e.g. '1pm - 5pm'

### `refresh()`

Refreshes all the periods in memory

### `refresh_fields() → None`

After adding a field one needs to refresh all the fields recognized by the software

**save()**

**property data: DataFrame**

Returns all periods data as a Pandas DataFrame

**Returns**

**table** (DataFrame): Pandas DataFrame with all the periods

**property default\_period: Period**

**property fields: FieldEditor**

Returns a FieldEditor class instance to edit the zones table fields and their metadata

**sql = ''**

Query sql for retrieving periods

## 11.3 Network Items

<code>Mode(mode_id, project)</code>	A mode object represents a single record in the <i>modes</i> table
<code>LinkType(data_set, project)</code>	A link_type object represents a single record in the <i>link_types</i> table
<code>Link(dataset, project)</code>	A Link object represents a single record in the <i>links</i> table
<code>Node(dataset, project)</code>	A Node object represents a single record in the <i>nodes</i> table
<code>Period(dataset, project)</code>	A Period object represents a single record in the <i>periods</i> table

### 11.3.1 aequilibrae.project.network.Mode

**class** aequilibrae.project.network.**Mode** (*mode\_id: str, project*)

A mode object represents a single record in the *modes* table

`__init__` (*mode\_id: str, project*) → None

#### Methods

`__init__` (*mode\_id, project*)

`save()`

**save()**

### 11.3.2 aequilibrae.project.network.LinkType

**class** aequilibrae.project.network.**LinkType** (*data\_set: dict, project*)

A link\_type object represents a single record in the *link\_types* table

`__init__` (*data\_set: dict, project*) → None

## Methods

```
__init__(data_set, project)
```

```
delete()
```

```
save()
```

**delete()**

**save()**

### 11.3.3 aequilibrae.project.network.Link

**class** aequilibrae.project.network.**Link** (*dataset, project*)

A Link object represents a single record in the *links* table

```
>>> project = create_example(project_path)

>>> all_links = project.network.links

# Let's get a mode to work with
>>> modes = project.network.modes
>>> car_mode = modes.get('c')

# We can just get one link in specific
>>> link1 = all_links.get(3)
>>> link2 = all_links.get(17)

# We can find out which fields exist for the links
>>> which_fields_do_we_have = link1.data_fields()

# And edit each one like this
>>> link1.lanes_ab = 3
>>> link1.lanes_ba = 2

# we can drop a mode from the link
>>> link1.drop_mode(car_mode) # or link1.drop_mode('c')

# we can add a mode to the link
>>> link2.add_mode(car_mode) # or link2.add_mode('c')

# Or set all modes at once
>>> link2.set_modes('cbtw')

# We can just save the link
>>> link1.save()
>>> link2.save()
```

```
__init__(dataset, project)
```

## Methods

<code>__init__(dataset, project)</code>	
<code>add_mode(mode)</code>	Adds a new mode to this link
<code>data_fields()</code>	lists all data fields for the link, as available in the database
<code>delete()</code>	Deletes link from database
<code>drop_mode(mode)</code>	Removes a mode from this link
<code>save([conn])</code>	Saves link to database
<code>set_modes(modes)</code>	Sets the modes acceptable for this link

**add\_mode** (*mode*: str | Mode)

Adds a new mode to this link

Raises a warning if mode is already allowed on the link, and fails if mode does not exist

### Arguments

**mode\_id** (str or Mode): Mode\_id of the mode or mode object to be added to the link

**data\_fields** () → list

lists all data fields for the link, as available in the database

### Returns

**data fields** (list): list of all fields available for editing

**delete** ()

Deletes link from database

**drop\_mode** (*mode*: str | Mode)

Removes a mode from this link

Raises a warning if mode is already NOT allowed on the link, and fails if mode does not exist

### Arguments

**mode\_id** (str or Mode): Mode\_id of the mode or mode object to be removed from the link

**save** (*conn*=None)

Saves link to database

**set\_modes** (*modes*: str)

Sets the modes acceptable for this link

### Arguments

**modes** (str): string with all mode\_ids to be assigned to this link

## 11.3.4 aequilibrae.project.network.Node

**class** aequilibrae.project.network.**Node** (*dataset, project*)

A Node object represents a single record in the *nodes* table

```
>>> from shapely.geometry import Point
>>> project = create_example(project_path)
>>> all_nodes = project.network.nodes
```

(continues on next page)

(continued from previous page)

```

# We can just get one link in specific
>>> node1 = all_nodes.get(7)

# We can find out which fields exist for the links
>>> which_fields_do_we_have = node1.data_fields()

# It success if the node_id already does not exist
>>> node1.renumber(998877)

>>> node1.geometry = Point(1,2)

# We can just save the node
>>> node1.save()

```

`__init__(dataset, project)`

## Methods

<code>__init__(dataset, project)</code>	
<code>connect_mode(mode_id[, link_types, ...])</code>	Adds centroid connectors for the desired mode to the network file
<code>data_fields()</code>	lists all data fields for the node, as available in the database
<code>renumber(new_id)</code>	Renumbers the node in the network
<code>save()</code>	Saves node to database

**connect\_mode** (*mode\_id*: str, *link\_types*="", *connectors*=1, *conn*: Connection | None = None, *area*: Polygon | None = None)

Adds centroid connectors for the desired mode to the network file

Centroid connectors are created by connecting the zone centroid to one or more nodes selected from all those that satisfy the mode and link\_types criteria and are inside the provided area.

The selection of the nodes that will be connected is done simply by computing running the [KMeans2](#) clustering algorithm from SciPy and selecting the nodes closest to each cluster centroid.

When there are no node candidates inside the provided area, is it progressively expanded until at least one candidate is found.

If fewer candidates than required connectors are found, all candidates are connected.

### Arguments

**mode\_id** (str): Mode ID we are trying to connect

**link\_types** (str, Optional): String with all the link type IDs that can be considered. eg: yCdR.  
Defaults to ALL link types

**connectors** (int, Optional): Number of connectors to add. Defaults to 1

**area** (Polygon, Optional): Area limiting the search for connectors

**data\_fields** () → list

lists all data fields for the node, as available in the database

**Returns****data\_fields** (*list*): list of all fields available for editing**renumber** (*new\_id: int*)

Renumbers the node in the network

Logs a warning if another node already exists with this *node\_id***Arguments****new\_id** (*int*): New *node\_id***save** ()

Saves node to database

### 11.3.5 aequilibræ.project.network.Period

**class** `aequilibræ.project.network.Period` (*dataset, project*)A *Period* object represents a single record in the *periods* table

```

>>> project = create_example(project_path, "coquimbo")

>>> all_periods = project.network.periods

# We can just get one link in specific
>>> period1 = all_periods.get(1)

# We can find out which fields exist for the period
>>> which_fields_do_we_have = period1.data_fields()

```

**\_\_init\_\_** (*dataset, project*)**Methods**

<code>__init__(dataset, project)</code>	
<code>data_fields()</code>	Lists all data fields for the period, as available in the database
<code>renumber(new_id)</code>	Renumbers the period in the network
<code>save()</code>	Saves period to database

**data\_fields** () → list

Lists all data fields for the period, as available in the database

**Returns****data\_fields** (*list*): list of all fields available for editing**renumber** (*new\_id: int*)

Renumbers the period in the network

Logs a warning if another period already exists with this *period\_id***Arguments****new\_id** (*int*): New *period\_id***save** ()

Saves period to database

## 11.4 Distribution

<code>Ipf([project])</code>	Iterative proportional fitting procedure
<code>GravityCalibration([project])</code>	Calibrate a traditional gravity model
<code>GravityApplication([project])</code>	Applies a synthetic gravity model.
<code>SyntheticGravityModel()</code>	Simple class object to represent synthetic gravity models

### 11.4.1 `aequilibrae.distribution.Ipf`

**class** `aequilibrae.distribution.Ipf` (*project=None, \*\*kwargs*)

Iterative proportional fitting procedure

```
>>> from aequilibrae.distribution import Ipf

>>> project = create_example(project_path)

>>> matrix = project.matrices.get_matrix("demand_omx")
>>> matrix.computational_view()

>>> vectors = pd.DataFrame({"productions":np.zeros(matrix.zones), "attractions"
↪":np.zeros(matrix.zones)}, index=matrix.index)

>>> vectors["productions"] = matrix.rows()
>>> vectors["attractions"] = matrix.columns()

>>> ipf_args = {"matrix": matrix,
...            "vectors": vectors,
...            "row_field": "productions",
...            "column_field": "attractions",
...            "nan_as_zero": False}

>>> fratar = Ipf(**ipf_args)
>>> fratar.fit()

# We can get back to our OMX matrix in the end
>>> fratar.output.export(os.path.join(my_folder_path, "to_omx_output.omx"))
```

**\_\_init\_\_** (*project=None, \*\*kwargs*)

Instantiates the IPF problem

#### Arguments

**matrix** (`AequilibraeMatrix`): Seed Matrix

**vectors** (`pd.DataFrame`): Dataframe with the vectors to be used for the IPF

**row\_field** (`str`): Field name that contains the data for the row totals

**column\_field** (`str`): Field name that contains the data for the column totals

**parameters** (`str`, *Optional*): Convergence parameters. Defaults to those in the parameter file

**nan\_as\_zero** (`bool`, *Optional*): If Nan values should be treated as zero. Defaults to `True`

#### Results

**output** (`AequilibraeMatrix`): Result Matrix

**report** (list): Iteration and convergence report

**error** (str): Error description

## Methods

<code>__init__([project])</code>	Instantiates the IPF problem
<code>fit()</code>	Runs the IPF instance problem to adjust the matrix
<code>save_to_project(name, file_name[, project])</code>	Saves the matrix output to the project file

**fit()**

Runs the IPF instance problem to adjust the matrix

Resulting matrix is the *output* class member

**save\_to\_project** (*name: str, file\_name: str, project=None*) → MatrixRecord

Saves the matrix output to the project file

### Arguments

**name** (str): Name of the desired matrix record

**file\_name** (str): Name for the matrix file name. AEM and OMX supported

**project** (Project, *Optional*): Project we want to save the results to. Defaults to the active project

## 11.4.2 aequilbrae.distribution.GravityCalibration

**class** aequilbrae.distribution.**GravityCalibration** (*project=None, \*\*kwargs*)

Calibrate a traditional gravity model

Available deterrence function forms are: 'EXPO', 'POWER' or 'GAMMA'.

```
>>> from aequilbrae.distribution import GravityCalibration

>>> project = create_example(project_path)

# We load the demand matrix
>>> demand = project.matrices.get_matrix("demand_omx")
>>> demand.computational_view()

# We load the skim matrix
>>> skim = project.matrices.get_matrix("skims")
>>> skim.computational_view(["time_final"])

>>> args = {"matrix": demand,
...         "impedance": skim,
...         "row_field": "productions",
...         "function": 'expo',
...         "nan_as_zero": True}
>>> gravity = GravityCalibration(**args)

# Solve and save outputs
>>> gravity.calibrate()
>>> gravity.model.save(os.path.join(project_path, 'dist_expo_model.mod'))
```

`__init__` (*project=None, \*\*kwargs*)

Instantiates the Gravity calibration problem

#### Arguments

**matrix** (*AequilibraeMatrix*): Seed/base trip matrix

**impedance** (*AequilibraeMatrix*): Impedance matrix to be used

**function** (*str*): Function name to be calibrated. “EXPO” or “POWER”

**project** (*Project, Optional*): The Project to connect to. By default, uses the currently active project

**parameters** (*str, Optional*): Convergence parameters. Defaults to those in the parameter file

**nan\_as\_zero** (*bool, Optional*): If Nan values should be treated as zero. Defaults to `True`

#### Results

**model** (*SyntheticGravityModel*): Calibrated model

**report** (*list*): Iteration and convergence report

**error** (*str*): Error description

#### Methods

<code>__init__</code> ([ <i>project</i> ])	Instantiates the Gravity calibration problem
<code>calibrate</code> ()	Calibrate the model

**calibrate** ()

Calibrate the model

Resulting model is in *output* class member

### 11.4.3 aequilibrae.distribution.GravityApplication

**class** `aequilibrae.distribution.GravityApplication` (*project=None, \*\*kwargs*)

Applies a synthetic gravity model.

Model is an instance of `SyntheticGravityModel` class.

Impedance is an instance of `AequilibraEMatrix`.

Vectors are a pandas `DataFrame`.

```
>>> import pandas as pd
>>> from aequilibrae.distribution import SyntheticGravityModel, GravityApplication

>>> project = create_example(project_path)

# We define the model we will use
>>> model = SyntheticGravityModel()

# Before adding a parameter to the model, you need to define the model functional_
↪form
# You can select one of GAMMA, EXPO or POWER.
>>> model.function = "GAMMA"
```

(continues on next page)

(continued from previous page)

```

# Only the parameter(s) applicable to the chosen functional form will have any
↳effect
>>> model.alpha = 0.1
>>> model.beta = 0.0001

# We load the impedance matrix
>>> matrix = project.matrices.get_matrix("skirts")
>>> matrix.computational_view(["distance_blended"])

# We create the vectors we will use
>>> query = "SELECT zone_id, population, employment FROM zones;"
>>> with project.db_connection as conn:
...     df = pd.read_sql(query, conn)
>>> df.sort_values(by="zone_id", inplace=True)
>>> df.set_index("zone_id", inplace=True)

# You create the vectors you would have
>>> df = df.assign(productions=df.population * 3.0)
>>> df = df.assign(attractions=df.employment * 4.0)
>>> vectors = df[["productions", "attractions"]]

# Balance the vectors
>>> vectors.loc[:, "attractions"] *= vectors["productions"].sum() / vectors[
↳"attractions"].sum()

# Create the problem object
>>> args = {"impedance": matrix,
...        "vectors": vectors,
...        "row_field": "productions",
...        "model": model,
...        "column_field": "attractions",
...        "output": os.path.join(project_path, 'matrices/gravity_matrix.aem'),
...        "nan_as_zero": True
...        }
>>> gravity = GravityApplication(**args)

# Solve and save the outputs
>>> gravity.apply()
>>> gravity.output.export(os.path.join(project_path, 'matrices/gravity_omx.omx'))

```

`__init__` (*project=None, \*\*kwargs*)

Instantiates the IPF problem

#### Arguments

**model** (*SyntheticGravityModel*): Synthetic gravity model to apply

**impedance** (*AequilibraeMatrix*): Impedance matrix to be used

**vectors** (*pd.DataFrame*): Dataframe with data for row and column totals

**row\_field** (*str*): Field name that contains the data for the row totals

**column\_field** (*str*): Field name that contains the data for the column totals

**project** (*Project, Optional*): The Project to connect to. By default, uses the currently active

**project**

**core\_name** (*str*, *Optional*): Name for the output matrix core. Defaults to “gravity”

**parameters** (*str*, *Optional*): Convergence parameters. Defaults to those in the parameter file

**nan\_as\_zero** (*bool*, *Optional*): If NaN values should be treated as zero. Defaults to `True`

### Results

**output** (`AequilibraeMatrix`): Result Matrix

**report** (*list*): Iteration and convergence report

**error** (*str*): Error description

### Methods

<code>__init__</code> ([ <i>project</i> ])	Instantiates the IPF problem
<code>apply</code> ()	Runs the Gravity Application instance as instantiated
<code>save_to_project</code> ( <i>name</i> , <i>file_name</i> [, <i>project</i> ])	Saves the matrix output to the project file

### `apply` ()

Runs the Gravity Application instance as instantiated

Resulting matrix is the *output* class member

**save\_to\_project** (*name: str*, *file\_name: str*, *project=None*) → `None`

Saves the matrix output to the project file

### Arguments

**name** (*str*): Name of the desired matrix record

**file\_name** (*str*): Name for the matrix file name. AEM and OMX supported

**project** (`Project`, *Optional*): Project we want to save the results to. Defaults to the active project

## 11.4.4 `aequilibrae.distribution.SyntheticGravityModel`

**class** `aequilibrae.distribution.SyntheticGravityModel`

Simple class object to represent synthetic gravity models

`__init__`()

### Methods

<code>__init__</code> ()	
<code>load</code> ( <i>file_name</i> )	Loads model from disk.
<code>save</code> ( <i>file_name</i> )	Saves model to disk in yaml format.

**load** (*file\_name*)

Loads model from disk. Extension is \*.mod

**save** (*file\_name*)

Saves model to disk in yaml format. Extension is \*.mod

## 11.5 Matrix

---

*AequibraeMatrix()*

Matrix class

### 11.5.1 `aequilibrae.matrix.AequibraeMatrix`

**class** `aequilibrae.matrix.AequibraeMatrix`

Matrix class

`__init__()`

Creates a memory instance for a matrix, that can be used to load an existing matrix or to create an empty one

#### Methods

<code>__init__()</code>	Creates a memory instance for a matrix, that can be used to load an existing matrix or to create an empty one
<code>close()</code>	Removes matrix from memory and flushes all data to disk, or closes the OMX file if that is the case
<code>columns()</code>	Returns column vector for the matrix in the computational view
<code>computational_view([core_list])</code>	Creates a memory view for a list of matrices that is compatible with Cython memory buffers
<code>copy([output_name, cores, names, compress, ...])</code>	Copies a list of cores (or all cores) from one matrix file to another one
<code>create_empty([file_name, zones, ...])</code>	Creates an empty matrix in the AequibraE format
<code>create_from_omx(omx_path[, file_path, ...])</code>	Creates an <code>AequibraeMatrix</code> from an original OpenMatrix
<code>create_from_trip_list(path_to_file, ...)</code>	Creates an <code>AequibraeMatrix</code> from a trip list csv file. The output is saved in the same folder as the trip list file
<code>export(output_name[, cores])</code>	Exports the matrix to other formats, rather than AEM.
<code>get_matrix(core[, copy])</code>	Returns the data for a matrix core
<code>is_omx()</code>	Returns <code>True</code> if matrix data source is OMX, <code>False</code> otherwise
<code>load(file_path)</code>	Loads matrix from disk.
<code>nan_to_num()</code>	Converts all <code>NaN</code> values in all cores in the computational view to zeros
<code>random_name()</code>	Returns a random name for a matrix with root in the temp directory of the user
<code>rows()</code>	Returns row vector for the matrix in the computational view
<code>save([names, file_name])</code>	Saves matrix data back to file.
<code>setDescription(matrix_description)</code>	Sets description for the matrix
<code>setName(matrix_name)</code>	Sets the name for the matrix itself.
<code>set_index(index_to_set)</code>	Sets the standard index to be the one the user wants to have be the one being used in all operations during run time.

**close()**

Removes matrix from memory and flushes all data to disk, or closes the OMX file if that is the case

**columns** () → ndarray

Returns column vector for the matrix in the computational view

Computational view needs to be set to a single matrix core

**Returns**

**object** (np.ndarray): the column totals for the matrix currently on the computational view

```
>>> from aequilibrae.matrix import AequilibraeMatrix

>>> project = create_example(project_path)

>>> mat = AequilibraeMatrix()
>>> mat.load(os.path.join(project_path, 'matrices/skims.omx'))
>>> mat.computational_view(["distance_blended"])
>>> mat.columns()
array([[357.54256811, 357.45109051, 310.88655449, 276.6783439 ,
        266.70388637, 270.62976319, 266.32888632, 279.6897402 ,
        285.89821842, 242.79743295, 252.34085912, 301.78116548,
        302.97058146, 270.61855294, 264.59944248, 257.83842251,
        276.63310578, 257.74513863, 281.15724257, 271.63886077,
        264.62215032, 252.79791125, 273.18139747, 282.7636574 ]])
```

**computational\_view** (core\_list: List[str] | None = None)

Creates a memory view for a list of matrices that is compatible with Cython memory buffers

It allows for AequilibraE matrices to be used in all parallelized algorithms within AequilibraE

In case of OMX matrices, the computational view is held only in memory

**Arguments**

**core\_list** (list): List with the names of all matrices that need to be in the buffer

```
>>> from aequilibrae.matrix import AequilibraeMatrix

>>> zones_in_the_model = 3317
>>> names_list = ['Car trips', 'pt trips', 'DRT trips', 'bike trips', 'walk_
↳trips']

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  matrix_names=names_list)
>>> mat.computational_view(['bike trips', 'walk trips'])
>>> mat.view_names
['bike trips', 'walk trips']
```

**copy** (output\_name: str | None = None, cores: List[str] | None = None, names: List[str] | None = None, compress: bool | None = None, memory\_only: bool = True)

Copies a list of cores (or all cores) from one matrix file to another one

**Arguments**

**output\_name** (str): Name of the new matrix file. If none is provided, returns a copy in memory only

**cores** (list): List of the matrix cores to be copied

**names** (list, Optional): List with the new names for the cores. Defaults to current names

**compress** (`bool`, *Optional*): Whether you want to compress the matrix or not. Defaults to `False`. Not yet implemented

**memory\_only** (`bool`, *Optional*): Whether you want to keep the matrix copy in memory only. Defaults to `True`

```
>>> from aequilibrae.matrix import AequilibraeMatrix

>>> zones_in_the_model = 3317
>>> names_list = ['Car trips', 'pt trips', 'DRT trips', 'bike trips', 'walk_
↳trips']

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  matrix_names=names_list)

>>> mat.copy(os.path.join(my_folder_path, 'copy_of_my_matrix.aem'),
...          cores=['bike trips', 'walk trips'],
...          names=['bicycle', 'walking'],
...          memory_only=False)
<aequilibrae.matrix.aequilibrae_matrix.AequilibraeMatrix object at 0x...>

>>> mat2 = AequilibraeMatrix()
>>> mat2.load(os.path.join(my_folder_path, 'copy_of_my_matrix.aem'))
>>> mat2.cores
2
```

**create\_empty** (*file\_name: str | None = None, zones: int | None = None, matrix\_names: ~typing.List[str] | None = None, data\_type: ~numpy.dtype = <class 'numpy.float64'>, index\_names: ~typing.List[str] | None = None, compressed: bool = False, memory\_only: bool = True*)

Creates an empty matrix in the AequilibraE format

#### Arguments

**file\_name** (`str`): Local path to the matrix file

**zones** (`int`): Number of zones in the model (Integer). Maximum number of zones in a matrix is 4,294,967,296

**matrix\_names** (`list`): A regular Python list of names of the matrix. Limit is 50 characters each. Maximum number of cores per matrix is 256

**data\_type** (`np.dtype`, *Optional*): Data type of the matrix as NUMPY data types (`np.int32`, `np.int64`, `np.float32`, `np.float64`). Defaults to `np.float64`

**index\_names** (`list`, *Optional*): A regular Python list of names for indices. Limit is 20 characters each. Maximum number of indices per matrix is 256

**compressed** (`bool`, *Optional*): Whether it is a flat matrix or a compressed one (Boolean - Not yet implemented)

**memory\_only** (`bool`, *Optional*): Whether you want to keep the matrix copy in memory only. Defaults to `True`

```
>>> from aequilibrae.matrix import AequilibraeMatrix

>>> zones_in_the_model = 3317
```

(continues on next page)

(continued from previous page)

```

>>> names_list = ['Car trips', 'pt trips', 'DRT trips', 'bike trips', 'walk_
↳trips']

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                 zones=zones_in_the_model,
...                 matrix_names=names_list,
...                 memory_only=False)
>>> mat.num_indices
1
>>> mat.zones
3317

```

**create\_from\_omx** (*omx\_path: str, file\_path: str | None = None, cores: List[str] | None = None, mappings: List[str] | None = None, robust: bool = True, compressed: bool = False, memory\_only: bool = True*) → None

Creates an AequilibraeMatrix from an original OpenMatrix

#### Arguments

**omx\_path** (*str*): Path to the OMX file one wants to import

**file\_path** (*str, Optional*): Path for the output AequilibraeMatrix

**cores** (*list, Optional*): List of matrix cores to be imported

**mappings** (*list, Optional*): List of the matrix mappings (i.e. indices, centroid numbers) to be imported

**robust** (*bool, Optional*): Boolean for whether AequilibraE should try to adjust the names for cores and indices in case they are too long. Defaults to True

**compressed** (*bool, Optional*): Boolean for whether we should compress the output matrix. Not yet implemented

**memory\_only** (*bool, Optional*): Whether you want to keep the matrix copy in memory only. Defaults to True

**create\_from\_trip\_list** (*path\_to\_file: str, from\_column: str, to\_column: str, list\_cores: List[str]*) → str

Creates an AequilibraeMatrix from a trip list csv file The output is saved in the same folder as the trip list file

#### Arguments

**path\_to\_file** (*str*): Path for the trip list csv file

**from\_column** (*str*): trip list file column containing the origin zones numbers

**to\_column** (*str*): trip list file column containing the destination zones numbers

**list\_cores** (*list*): list of core columns in the trip list file

**export** (*output\_name: str, cores: List[str] | None = None*)

Exports the matrix to other formats, rather than AEM. Formats currently supported: CSV, OMX

When exporting to AEM or OMX, the user can chose to export only a set of cores, but all indices are exported

When exporting to CSV, the active index will be used, and all cores will be exported as separate columns in the output file

#### Arguments

**output\_name** (*str*): Path to the output file

**cores** (*list*): Names of the cores to be exported.

```

>>> from aequibrae.matrix import AequibraeMatrix

>>> zones_in_the_model = 3317
>>> names_list = ['Car trips', 'pt trips', 'DRT trips', 'bike trips', 'walk_
↳trips']

>>> mat = AequibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  matrix_names=names_list)

>>> mat.export(os.path.join(my_folder_path, 'my_new_path.aem'), ['Car trips',
↳'bike trips'])

>>> mat2 = AequibraeMatrix()
>>> mat2.load(os.path.join(my_folder_path, 'my_new_path.aem'))
>>> mat2.cores
2

```

**get\_matrix** (*core: str, copy=False*) → ndarray

Returns the data for a matrix core

#### Arguments

**core** (str): name of the matrix core to be returned

**copy** (bool, *Optional*): return a copy of the data. Defaults to False

#### Returns

**object** (np.ndarray): NumPy array

**is\_omx** ()

Returns True if matrix data source is OMX, False otherwise

**load** (*file\_path: str*)

Loads matrix from disk. All cores and indices are load. First index is default.

#### Arguments

**file\_path** (str): Path to AEM or OMX file on disk

```

>>> from aequibrae.matrix import AequibraeMatrix

>>> project = create_example(project_path)

>>> mat = AequibraeMatrix()
>>> mat.load(os.path.join(project_path, 'matrices/skims.omx'))
>>> mat.computational_view()
>>> mat.names
['distance_blended', 'time_final']

```

**nan\_to\_num** ()

Converts all NaN values in all cores in the computational view to zeros

```

>>> from aequibrae.matrix import AequibraeMatrix

>>> nan_matrix = np.empty((3,3))

```

(continues on next page)

(continued from previous page)

```

>>> nan_matrix[:] = np.nan

>>> index = np.arange(1, 4, dtype=np.int32)

>>> mat = AequibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, "matrices/nan_
↳matrix.aem"),
...                   zones=3,
...                   matrix_names=["only_nan"])
>>> mat.index[:] = index[:]
>>> mat.matrix["only_nan"][:, :] = nan_matrix[:, :]
>>> mat.computational_view()
>>> mat.nan_to_num()
>>> mat.get_matrix("only_nan")
array([[0., 0., 0.],
       [0., 0., 0.],
       [0., 0., 0.]])

```

**static random\_name()** → str

Returns a random name for a matrix with root in the temp directory of the user

```

>>> from aequibrae.matrix import AequibraeMatrix

>>> mat = AequibraeMatrix()
>>> mat.random_name()
'/tmp/Aequibrae_matrix_...'

```

**rows()** → ndarray

Returns row vector for the matrix in the computational view

Computational view needs to be set to a single matrix core

**Returns****object** (np.ndarray): the row totals for the matrix currently on the computational view

```

>>> from aequibrae.matrix import AequibraeMatrix

>>> project = create_example(project_path)

>>> mat = AequibraeMatrix()
>>> mat.load(os.path.join(project_path, 'matrices/skims.omx'))
>>> mat.computational_view(["distance_blended"])
>>> mat.rows()
array([357.68202084, 358.68778868, 310.68285491, 275.87964738,
       265.91709918, 268.60184371, 267.32264726, 281.3793747 ,
       286.15085073, 242.60308705, 252.1776242 , 305.56774194,
       303.58100777, 270.48841269, 263.20417379, 253.92665702,
       277.1655432 , 258.84368258, 280.65697316, 272.7651157 ,
       264.06806038, 252.87533845, 273.45639965, 281.61102767])

```

**save** (names=(), file\_name=None) → None

Saves matrix data back to file.

If working with AEM file, it flushes data to disk. If working with OMX, requires new names.

**Arguments**

**names** (tuple (str), *Optional*): New names for the matrices. Required if working with OMX files

**file\_name** (str, *Optional*): Local path to the matrix file

**setDescription** (matrix\_description: str)

Sets description for the matrix

**Arguments**

**matrix\_description** (str): Text with matrix description. Maximum length is 144 characters

```
>>> from aequibrae.matrix import AequibraeMatrix

>>> zones_in_the_model = 3317

>>> mat = AequibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  memory_only=False)
>>> mat.setDescription('This is a text')
>>> mat.save()
>>> mat.close()

>>> mat = AequibraeMatrix()
>>> mat.load(os.path.join(my_folder_path, 'my_matrix.aem'))
>>> mat.description.decode('utf-8')
'This is a text'
```

**setName** (matrix\_name: str)

Sets the name for the matrix itself. Only works for matrices in disk.

**Arguments**

**matrix\_name** (str): matrix name. Maximum length is 50 characters

```
>>> from aequibrae.matrix import AequibraeMatrix

>>> zones_in_the_model = 3317

>>> mat = AequibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  memory_only=False)
>>> mat.setName('This is my example')
>>> mat.save()
>>> mat.close()

>>> mat = AequibraeMatrix()
>>> mat.load(os.path.join(my_folder_path, 'my_matrix.aem'))
>>> mat.name.decode('utf-8')
'This is my example'
```

**set\_index** (index\_to\_set: str) → None

Sets the standard index to be the one the user wants to have be the one being used in all operations during run time. The first index is ALWAYS the default one every time the matrix is instantiated

**Arguments**

**index\_to\_set** (str): Name of the index to be used. The default index name is 'main\_index'

```
>>> from aequilibrae.matrix import AequilibraeMatrix

>>> zones_in_the_model = 3317
>>> names_list = ['Car trips', 'pt trips', 'DRT trips', 'bike trips', 'walk_
↳trips']
>>> index_list = ['tazs', 'census']

>>> mat = AequilibraeMatrix()
>>> mat.create_empty(file_name=os.path.join(my_folder_path, 'my_matrix.aem'),
...                  zones=zones_in_the_model,
...                  matrix_names=names_list,
...                  index_names=index_list )
>>> mat.num_indices
2
>>> mat.current_index
'tazs'
>>> mat.set_index('census')
>>> mat.current_index
'census'
```

## 11.6 Paths

### 11.6.1 Skimming

```
NetworkSkimming(graph[, origins, project])
```

#### **aequilibrae.paths.NetworkSkimming**

**class** aequilibrae.paths.**NetworkSkimming** (graph, origins=None, project=None)

**\_\_init\_\_** (graph, origins=None, project=None)

#### **Methods**

```
__init__(graph[, origins, project])
```

```
doWork()
```

```
execute()
```

```
save_to_project(name[, format, project])
```

Runs the skimming process as specified in the graph  
Saves skim results to the project folder and creates record in the database

```
set_cores(cores)
```

Sets number of cores (threads) to be used in computation

## Attributes

```
signal
```

**doWork ()**

**execute ()**

Runs the skimming process as specified in the graph

**save\_to\_project** (*name: str, format='omx', project=None*) → None

Saves skim results to the project folder and creates record in the database

### Arguments

**name** (*str*): Name of the matrix. Same value for matrix record name and file (plus extension)

**format** (*str, Optional*): File format ('aem' or 'omx'). Default is 'omx'

**project** (*Project, Optional*): Project we want to save the results to. Defaults to the active project

**set\_cores** (*cores: int*) → None

Sets number of cores (threads) to be used in computation

Value of zero sets number of threads to all available in the system, while negative values indicate the number of threads to be left out of the computational effort.

Resulting number of cores will be adjusted to a minimum of zero or the maximum available in the system if the inputs result in values outside those limits

### Arguments

**cores** (*int*): Number of cores to be used in computation

**signal** = <aequilibrae.utils.python\_signal.PythonSignal object>

```
>>> from aequilibrae.paths.network_skimming import NetworkSkimming
```

```
>>> project = create_example(project_path)
```

```
>>> network = project.network
>>> network.build_graphs()
```

```
>>> graph = network.graphs['c']
>>> graph.set_graph(cost_field="distance")
>>> graph.set_skimming("distance")
```

```
>>> skm = NetworkSkimming(graph)
>>> skm.execute()
```

```
# The skim report (if any error generated) is available here >>> skm.report []
```

```
# To access the skim matrix directly from its temporary file >>> matrix = skm.results.skims
```

```
# Or you can save the results to disk >>> skm.save_to_project(os.path.join(project_path, 'matrices/skimming_result.omx'))
```

```
# Or specify the AequilibraE's matrix file format >>> skm.save_to_project(os.path.join(project_path, 'ma-
trices/skimming_result.aem'), 'aem')
```

```
>>> project.close()
```

## 11.6.2 Graph

```
Graph(*args, **kwargs)
```

```
TransitGraph([config, od_node_mapping])
```

### aequilibrae.paths.Graph

```
class aequilibrae.paths.Graph(*args, **kwargs)
```

```
    __init__(*args, **kwargs)
```

#### Methods

<code>__init__(*args, **kwargs)</code>	
<code>available_skims()</code>	Returns graph fields that are available to be set as skims
<code>compute_path(origin, destination[, ...])</code>	Returns the results from path computation result holder.
<code>compute_skims([cores])</code>	Returns the results from network skimming result holder.
<code>create_compressed_link_network_mapping()</code>	Create three arrays providing a mapping of compressed ID to link ID.
<code>default_types(tp)</code>	Returns the default integer and float types used for computation
<code>exclude_links(links)</code>	Excludes a list of links from a graph by setting their B node equal to their A node
<code>load_from_disk(filename)</code>	Loads graph from disk
<code>prepare_graph([centroids, remove_dead_ends])</code>	Prepares the graph for a computation for a certain set of centroids
<code>save_compressed_correspondence(path, ...)</code>	Save graph and nodes_to_indices to disk
<code>save_to_disk(filename)</code>	Saves graph to disk
<code>set_blocked_centroid_flows(block_centroid_flc</code>	Chooses whether we want to block paths to go through centroids or not.
<code>set_graph(cost_field)</code>	Sets the field to be used for path computation
<code>set_skimming(skim_fields)</code>	Sets the list of skims to be computed

```
available_skims() → List[str]
```

Returns graph fields that are available to be set as skims

#### Returns

**list** (str): Field names

```
compute_path(origin: int, destination: int, early_exit: bool = False, a_star: bool = False, heuristic: str | None = None)
```

Returns the results from path computation result holder.

**Arguments****origin** (*int*): origin for the path**destination** (*int*): destination for the path**early\_exit** (*bool*): stop constructing the shortest path tree once the destination is found. Doing so may cause subsequent calls to `update_trace` to recompute the tree. Default is `False`.**a\_star** (*bool*): whether or not to use A\* over Dijkstra's algorithm. When `True`, `early_exit` is always `True`. Default is `False`.**heuristic** (*str*): heuristic to use if `a_star` is enabled. Default is `None`.**compute\_skims** (*cores: int | None = None*)

Returns the results from network skimming result holder.

**Arguments****cores** (*Union[int, None]*): number of cores (threads) to be used in computation**create\_compressed\_link\_network\_mapping** ()

Create three arrays providing a mapping of compressed ID to link ID.

Uses sparse compression. Index 'idx' by the by compressed ID and compressed ID + 1, the network IDs are then in the range `idx[id]:idx[id + 1]`.

Links not in the compressed graph are not contained within the 'data' array.

'node\_mapping' provides an easy way to check if a node index is present within the compressed graph. If the value is -1 then the node has been removed, either by compression or dead end link removal. If the value is greater than or equal to 0, then that value is the compressed node index.

```

>>> project = create_example(project_path)

>>> project.network.build_graphs()

>>> graph = project.network.graphs['c']
>>> graph.prepare_graph(np.arange(1, 25))

>>> idx, data, node_mapping = graph.create_compressed_link_network_mapping()

```

**Returns****idx** (*np.array*): index array for data**data** (*np.array*): array of link ids**node\_mapping**: (*np.array*): array of node\_mapping ids**default\_types** (*tp: str*)

Returns the default integer and float types used for computation

**Arguments****tp** (*str*): data type. 'int' or 'float'**exclude\_links** (*links: list*) → `None`

Excludes a list of links from a graph by setting their B node equal to their A node

**Arguments****links** (*list*): List of link IDs to be excluded from the graph

**load\_from\_disk** (*filename: str*) → None

Loads graph from disk

#### Arguments

**filename** (*str*): Path to file

**prepare\_graph** (*centroids: ndarray | None = None, remove\_dead\_ends: bool = True*) → None

Prepares the graph for a computation for a certain set of centroids

Under the hood, it sets all centroids to have IDs from 1 through **n**, which should correspond to the index of the matrix being assigned.

This is what enables having any node IDs as centroids, and it relies on the inference that all links connected to these nodes are centroid connectors.

#### Arguments

**centroids** (*np.ndarray*): Array with centroid IDs. Mandatory type Int64, unique and positive

**remove\_dead\_ends** (*bool*): Whether or not to remove dead ends from the graph. (*Optional*, default is “True”).

**save\_compressed\_correspondence** (*path, mode\_name, mode\_id*)

Save graph and nodes\_to\_indices to disk

**save\_to\_disk** (*filename: str*) → None

Saves graph to disk

#### Arguments

**filename** (*str*): Path to file. Usual file extension is ‘aeg’

**set\_blocked\_centroid\_flows** (*block\_centroid\_flows*) → None

Chooses whether we want to block paths to go through centroids or not.

Default value is `True`

#### Arguments

**block\_centroid\_flows** (*bool*): Blocking or not

**set\_graph** (*cost\_field*) → None

Sets the field to be used for path computation

#### Arguments

**cost\_field** (*str*): Field name. Must be numeric

**set\_skimming** (*skim\_fields: list*) → None

Sets the list of skims to be computed

Skimming with A\* may produce results that differ from traditional Dijkstra’s due to its use a heuristic.

#### Arguments

**skim\_fields** (*list*): Fields must be numeric

## aequilibrae.paths.TransitGraph

**class** `aequilibrae.paths.TransitGraph` (*config: dict | None = None, od\_node\_mapping: DataFrame | None = None, \*args, \*\*kwargs*)

**\_\_init\_\_** (*config: dict | None = None, od\_node\_mapping: DataFrame | None = None, \*args, \*\*kwargs*)

## Methods

<code>__init__([config, od_node_mapping])</code>	
<code>available_skims()</code>	Returns graph fields that are available to be set as skims
<code>compute_path(origin, destination[, ...])</code>	Returns the results from path computation result holder.
<code>compute_skims([cores])</code>	Returns the results from network skimming result holder.
<code>create_compressed_link_network_mapping()</code>	Create three arrays providing a mapping of compressed ID to link ID.
<code>default_types(tp)</code>	Returns the default integer and float types used for computation
<code>exclude_links(links)</code>	Excludes a list of links from a graph by setting their B node equal to their A node
<code>load_from_disk(filename)</code>	Loads graph from disk
<code>prepare_graph([centroids, remove_dead_ends])</code>	Prepares the graph for a computation for a certain set of centroids
<code>save_compressed_correspondence(path, ...)</code>	Save graph and nodes_to_indices to disk
<code>save_to_disk(filename)</code>	Saves graph to disk
<code>set_blocked_centroid_flows(block_centroid_flg)</code>	Chooses whether we want to block paths to go through centroids or not.
<code>set_graph(cost_field)</code>	Sets the field to be used for path computation
<code>set_skimming(skim_fields)</code>	Sets the list of skims to be computed

## Attributes

<code>config</code>
---------------------

**available\_skims** () → List[str]

Returns graph fields that are available to be set as skims

### Returns

**list** (str): Field names

**compute\_path** (origin: int, destination: int, early\_exit: bool = False, a\_star: bool = False, heuristic: str | None = None)

Returns the results from path computation result holder.

### Arguments

**origin** (int): origin for the path

**destination** (int): destination for the path

**early\_exit** (bool): stop constructing the shortest path tree once the destination is found. Doing so may cause subsequent calls to `update_trace` to recompute the tree. Default is `False`.

**a\_star** (bool): whether or not to use A\* over Dijkstra's algorithm. When `True`, `early_exit` is always `True`. Default is `False`.

**heuristic** (str): heuristic to use if `a_star` is enabled. Default is `None`.

**compute\_skims** (cores: int | None = None)

Returns the results from network skimming result holder.

**Arguments**

**cores** (Union[int, None]): number of cores (threads) to be used in computation

**create\_compressed\_link\_network\_mapping()**

Create three arrays providing a mapping of compressed ID to link ID.

Uses sparse compression. Index 'idx' by the by compressed ID and compressed ID + 1, the network IDs are then in the range `idx[id]:idx[id + 1]`.

Links not in the compressed graph are not contained within the 'data' array.

'node\_mapping' provides an easy way to check if a node index is present within the compressed graph. If the value is -1 then the node has been removed, either by compression or dead end link removal. If the value is greater than or equal to 0, then that value is the compressed node index.

```
>>> project = create_example(project_path)

>>> project.network.build_graphs()

>>> graph = project.network.graphs['c']
>>> graph.prepare_graph(np.arange(1,25))

>>> idx, data, node_mapping = graph.create_compressed_link_network_mapping()
```

**Returns**

**idx** (np.array): index array for data

**data** (np.array): array of link ids

**node\_mapping**: (np.array): array of node\_mapping ids

**default\_types** (tp: str)

Returns the default integer and float types used for computation

**Arguments**

**tp** (str): data type. 'int' or 'float'

**exclude\_links** (links: list) → None

Excludes a list of links from a graph by setting their B node equal to their A node

**Arguments**

**links** (list): List of link IDs to be excluded from the graph

**load\_from\_disk** (filename: str) → None

Loads graph from disk

**Arguments**

**filename** (str): Path to file

**prepare\_graph** (centroids: ndarray | None = None, remove\_dead\_ends: bool = True) → None

Prepares the graph for a computation for a certain set of centroids

Under the hood, it sets all centroids to have IDs from 1 through **n**, which should correspond to the index of the matrix being assigned.

This is what enables having any node IDs as centroids, and it relies on the inference that all links connected to these nodes are centroid connectors.

**Arguments**

**centroids** (np.ndarray): Array with centroid IDs. Mandatory type Int64, unique and positive

**remove\_dead\_ends** (bool): Whether or not to remove dead ends from the graph. (*Optional*, default is “True”).

**save\_compressed\_correspondence** (*path, mode\_name, mode\_id*)

Save graph and nodes\_to\_indices to disk

**save\_to\_disk** (*filename: str*) → None

Saves graph to disk

**Arguments**

**filename** (str): Path to file. Usual file extension is ‘aeg’

**set\_blocked\_centroid\_flows** (*block\_centroid\_flows*) → None

Chooses whether we want to block paths to go through centroids or not.

Default value is True

**Arguments**

**block\_centroid\_flows** (bool): Blocking or not

**set\_graph** (*cost\_field*) → None

Sets the field to be used for path computation

**Arguments**

**cost\_field** (str): Field name. Must be numeric

**set\_skimming** (*skim\_fields: list*) → None

Sets the list of skims to be computed

Skimming with A\* may produce results that differ from traditional Dijkstra’s due to its use a heuristic.

**Arguments**

**skim\_fields** (list): Fields must be numeric

**property config**

### 11.6.3 Traffic assignment

<i>TrafficClass</i> (name, graph, matrix)	Traffic class for equilibrium traffic assignment
<i>TransitClass</i> (name, graph, matrix)	
<i>VDF</i> ()	Volume-Delay function
<i>TrafficAssignment</i> ([project])	Traffic assignment class.
<i>TransitAssignment</i> (*args[, project])	
<i>AssignmentResults</i> ()	Assignment result holder for a single <i>TrafficClass</i> with multiple user classes
<i>TransitAssignmentResults</i> ()	Assignment result holder for a single <i>Transit</i>
<i>SkimResults</i> ()	Network skimming result holder.
<i>PathResults</i> ()	Path computation result holder

#### aequilibrae.paths.TrafficClass

**class** aequilibrae.paths.**TrafficClass** (*name: str, graph: Graph, matrix: AequilibraeMatrix*)

Traffic class for equilibrium traffic assignment

```

>>> from aequilibrae.paths import TrafficClass

>>> project = create_example(project_path)
>>> project.network.build_graphs()

>>> graph = project.network.graphs['c'] # we grab the graph for cars
>>> graph.set_graph('free_flow_time') # let's say we want to minimize time
>>> graph.set_skimming(['free_flow_time', 'distance']) # And will skim time and
↳distance
>>> graph.set_blocked_centroid_flows(True)

>>> proj_matrices = project.matrices

>>> demand = proj_matrices.get_matrix("demand_omx")
>>> demand.computational_view(['matrix'])

>>> tc = TrafficClass("car", graph, demand)
>>> tc.set_pce(1.3)

```

**\_\_init\_\_** (*name: str, graph: Graph, matrix: AequilibraeMatrix*) → None

Instantiates the class

#### Arguments

**name** (str): UNIQUE class name.

**graph** (*Graph*): Class/mode-specific graph

**matrix** (*AequilibraeMatrix*): Class/mode-specific matrix. Supports multiple user classes

#### Methods

<code>__init__(name, graph, matrix)</code>	Instantiates the class
<code>set_fixed_cost(field_name[, multiplier])</code>	Sets value of time
<code>set_pce(pce)</code>	Sets Passenger Car equivalent
<code>set_select_links(links)</code>	Set the selected links.
<code>set_vot(value_of_time)</code>	Sets value of time
<code>skim_congested([skim_fields])</code>	Skims the congested network.

#### Attributes

*info*

**set\_fixed\_cost** (*field\_name: str, multiplier=1*)

Sets value of time

#### Arguments

**field\_name** (str): Name of the graph field with fixed costs for this class

**multiplier** (*Union[float, int]*): Multiplier for the fixed cost. Defaults to 1 if not set

**set\_pce** (*pce: float | int*) → None

Sets Passenger Car equivalent

**Arguments**

**pce** (Union[float, int]): PCE. Defaults to 1 if not set

**set\_select\_links** (links: Dict[str, List[Tuple[int, int]]])

Set the selected links. Checks if the links and directions are valid. Translates link\_id and direction into unique link id used in compact graph. Supply links=None to disable select link analysis.

**Arguments**

**links** (Union[None, Dict[str, List[Tuple[int, int]]]]): name of link set and Link IDs and directions to be used in select link analysis

**set\_vot** (value\_of\_time: float) → None

Sets value of time

**Arguments**

**value\_of\_time** (Union[float, int]): Value of time. Defaults to 1 if not set

**skim\_congested** (skim\_fields=None)

Skims the congested network. The user can add a list of skims to be computed, which will be added to the congested time and the assignment cost from the last iteration of the assignment.

**Arguments**

**skim\_fields** (Union[None, str]): Name of the skims to use. If None, uses default only

**property info:** dict

**aequilibrae.paths.TransitClass**

**class** aequilibrae.paths.**TransitClass** (name: str, graph: TransitGraph, matrix: AequilibraeMatrix)

**\_\_init\_\_** (name: str, graph: TransitGraph, matrix: AequilibraeMatrix)

Instantiates the class

**Arguments**

**name** (str): UNIQUE class name.

**graph** (Graph): Class/mode-specific graph

**matrix** (AequilibraeMatrix): Class/mode-specific matrix. Supports multiple user classes

**Methods**

<code>__init__(name, graph, matrix)</code>	Instantiates the class
<code>set_demand_matrix_core(core)</code>	Set the matrix core to use for demand.

**Attributes**

<code>info</code>
-------------------

**set\_demand\_matrix\_core** (core: str)

Set the matrix core to use for demand.

**Arguments**

**core** (str):

**property info:** dict

## aequilibrae.paths.VDF

**class** aequilibrae.paths.VDF

Volume-Delay function

```
>>> from aequilibrae.paths import VDF

>>> vdf = VDF()
>>> vdf.functions_available()
['bpr', 'bpr2', 'conical', 'inrets']
```

`__init__()`

### Methods

`__init__()`

`functions_available()`

returns a list of all functions available

`functions_available()` → list

returns a list of all functions available

## aequilibrae.paths.TrafficAssignment

**class** aequilibrae.paths.TrafficAssignment (*project=None*)

Traffic assignment class.

For a comprehensive example on use, see the Use examples page.

```
>>> from aequilibrae.paths import TrafficAssignment, TrafficClass

>>> project = create_example(project_path)
>>> project.network.build_graphs()

>>> graph = project.network.graphs['c'] # we grab the graph for cars
>>> graph.set_graph('free_flow_time') # let's say we want to minimize time
>>> graph.set_skimming(['free_flow_time', 'distance']) # And will skim time and_
↳distance
>>> graph.set_blocked_centroid_flows(True)

>>> proj_matrices = project.matrices

>>> demand = proj_matrices.get_matrix("demand_omx")

# We will only assign one user class stored as 'matrix' inside the OMX file
>>> demand.computational_view(['matrix'])

# Creates the assignment class
>>> assigclass = TrafficClass("car", graph, demand)

>>> assig = TrafficAssignment()

# The first thing to do is to add at list of traffic classes to be assigned
```

(continues on next page)

```
>>> assig.set_classes([assigclass])

# Then we set the volume delay function
>>> assig.set_vdf("BPR") # This is not case-sensitive

# And its parameters
>>> assig.set_vdf_parameters({"alpha": "b", "beta": "power"})

# The capacity and free flow travel times as they exist in the graph
>>> assig.set_capacity_field("capacity")
>>> assig.set_time_field("free_flow_time")

# And the algorithm we want to use to assign
>>> assig.set_algorithm('bfw')

>>> assig.max_iter = 10
>>> assig.rgap_target = 0.00001

>>> assig.execute() # we then execute the assignment

# If you want, it is possible to access the convergence report
>>> convergence_report = pd.DataFrame(assig.assignment.convergence_report)

# Assignment results can be viewed as a Pandas DataFrame
>>> results_df = assig.results()

# Information on the assignment setup can be recovered with
>>> info = assig.info()

# Or save it directly to the results database
>>> results = assig.save_results(table_name='base_year_assignment')

# skims are here
>>> avg_skims = assigclass.results.skims # blended ones
>>> last_skims = assigclass._aon_results.skims # those for the last iteration
```

`__init__` (*project=None*) → None

## Methods

<code>__init__([project])</code>	
<code>add_class(traffic_class)</code>	Adds a traffic class to the assignment
<code>add_preload(preload[, name])</code>	Given a dataframe of 'link_id', 'direction' and 'preload', merge into current preloads dataframe.
<code>algorithms_available()</code>	Returns all algorithms available for use
<code>execute([log_specification])</code>	Processes assignment
<code>get_skim_results()</code>	Prepares the assignment skim results for all classes
<code>info()</code>	Returns information for the traffic assignment procedure
<code>log_specification()</code>	
<code>report()</code>	Returns the assignment convergence report
<code>results()</code>	Prepares the assignment results as a Pandas DataFrame
<code>save_results(table_name[, keep_zero_flows, ...])</code>	Saves the assignment results to results_database.sqlite
<code>save_select_link_flows(table_name[, project])</code>	Saves the select link link flows for all classes into the results database.
<code>save_select_link_matrices(matrix_name[, project])</code>	Saves the Select Link matrices for each TrafficClass in the current TrafficAssignment class into OMX format.
<code>save_select_link_results(name)</code>	Saves both the Select Link matrices and flow results at the same time, using the same name.
<code>save_skims(matrix_name[, which_ones, ...])</code>	Saves the skims (if any) to the skim folder and registers in the matrix list
<code>select_link_flows()</code>	Returns a dataframe of the select link flows for each class
<code>set_algorithm(algorithm)</code>	Chooses the assignment algorithm.
<code>set_capacity_field(capacity_field)</code>	Sets the graph field that contains link capacity for the assignment period -> e.g. 'capacity1h'.
<code>set_classes(classes)</code>	Sets Traffic classes to be assigned
<code>set_cores(cores)</code>	Allows one to set the number of cores to be used AFTER traffic classes have been added
<code>set_path_file_format(file_format)</code>	Specify path saving format.
<code>set_save_path_files(save_it)</code>	Turn path saving on or off.
<code>set_time_field(time_field)</code>	Sets the graph field that contains free flow travel time -> e.g. 'ftime'.
<code>set_vdf(vdf_function)</code>	Sets the Volume-delay function to be used
<code>set_vdf_parameters(par)</code>	Sets the parameters for the Volume-delay function.
<code>skim_congested([skim_fields, return_matrices])</code>	Skims the congested network.

## Attributes

<code>all_algorithms</code>
<code>bpr_parameters</code>

**add\_class** (*traffic\_class*: TrafficClass) → None

Adds a traffic class to the assignment

**Arguments****traffic\_class** (*TrafficClass*): Traffic class**add\_preload** (*preload: DataFrame, name: str | None = None*) → None

Given a dataframe of 'link\_id', 'direction' and 'preload', merge into current preloads dataframe.

**Arguments****preload** (*pd.DataFrame*): dataframe mapping 'link\_id' & 'direction' to 'preload' **name** (*str*): Name for particular preload (optional - default name will be chosen if not specified)**algorithms\_available** () → list

Returns all algorithms available for use

**Returns***list*: List of string values to be used with **set\_algorithm****execute** (*log\_specification=True*) → None

Processes assignment

**get\_skim\_results** () → list

Prepares the assignment skim results for all classes

**Returns****skim list** (*list*): Lists of all skims with the results for each class**info** () → dict

Returns information for the traffic assignment procedure

Dictionary contains keys 'Algorithm', 'Classes', 'Computer name', 'Procedure ID', 'Maximum iterations' and 'Target RGap'.

The classes key is also a dictionary with all the user classes per traffic class and their respective matrix totals

**Returns****info** (*dict*): Dictionary with summary information**log\_specification** ()**report** () → DataFrame

Returns the assignment convergence report

**Returns****DataFrame** (*pd.DataFrame*): Convergence report**results** () → DataFrame

Prepares the assignment results as a Pandas DataFrame

**Returns****DataFrame** (*pd.DataFrame*): Pandas DataFrame with all the assignment results indexed on *link\_id***save\_results** (*table\_name: str, keep\_zero\_flows=True, project=None*) → None

Saves the assignment results to results\_database.sqlite

Method fails if table exists

**Arguments****table\_name** (*str*): Name of the table to hold this assignment result**keep\_zero\_flows** (*bool*): Whether we should keep records for zero flows. Defaults to True**project** (*Project, Optional*): Project we want to save the results to. Defaults to the active project

**save\_select\_link\_flows** (*table\_name: str, project=None*) → None

Saves the select link flows for all classes into the results database.

**Arguments**

**table\_name** (*str*): Name of the table being inserted to. Note the traffic class

**project** (*Project, Optional*): Project we want to save the results to. Defaults to the active project

**save\_select\_link\_matrices** (*matrix\_name: str, project=None*) → None

Saves the Select Link matrices for each TrafficClass in the current TrafficAssignment class into OMX format.

**Arguments**

**name** (*str*): name of the matrices

**project** (*Project, Optional*): Project we want to save the results to. Defaults to the active project

**save\_select\_link\_results** (*name: str*) → None

Saves both the Select Link matrices and flow results at the same time, using the same name.

**Arguments**

**name** (*str*): name of the matrices

**save\_skims** (*matrix\_name: str, which\_ones='final', format='omx', project=None*) → None

Saves the skims (if any) to the skim folder and registers in the matrix list

**Arguments**

**name** (*str*): Name of the matrix record to hold this matrix (same name used for file name)

**which\_ones** (*str, Optional*): {'final': Results of the final iteration, 'blended': Averaged results for all iterations, 'all': Saves skims for both the final iteration and the blended ones}. Default is 'final'

**format** (*str, Optional*): File format ('aem' or 'omx'). Default is 'omx'

**project** (*Project, Optional*): Project we want to save the results to. Defaults to the active project

**select\_link\_flows** () → Dict[str, DataFrame]

Returns a dataframe of the select link flows for each class

**set\_algorithm** (*algorithm: str*)

Chooses the assignment algorithm. e.g. 'frank-wolfe', 'bfw', 'msa'

'fw' is also accepted as an alternative to 'frank-wolfe'

**Arguments**

**algorithm** (*str*): Algorithm to be used

**set\_capacity\_field** (*capacity\_field: str*) → None

Sets the graph field that contains link capacity for the assignment period -> e.g. 'capacity1h'

**Arguments**

**capacity\_field** (*str*): Field name

**set\_classes** (*classes: List[TrafficClass]*) → None

Sets Traffic classes to be assigned

**Arguments**

**classes** (*List[TrafficClass]*): List of Traffic classes for assignment

**set\_cores** (*cores: int*) → None

Allows one to set the number of cores to be used AFTER traffic classes have been added

Inherited from AssignmentResultsBase

**Arguments**

**cores** (*int*): Number of CPU cores to use

**set\_path\_file\_format** (*file\_format: str*) → None

Specify path saving format. Either parquet or feather.

**Arguments**

**file\_format** (*str*): Name of file format to use for path files

**set\_save\_path\_files** (*save\_it: bool*) → None

Turn path saving on or off.

**Arguments**

**save\_it** (*bool*): Boolean to indicate whether paths should be saved

**set\_time\_field** (*time\_field: str*) → None

Sets the graph field that contains free flow travel time -> e.g. 'fftime'

**Arguments**

**time\_field** (*str*): Field name

**set\_vdf** (*vdf\_function: str*) → None

Sets the Volume-delay function to be used

**Arguments**

**vdf\_function** (*str*): Name of the VDF to be used

**set\_vdf\_parameters** (*par: dict*) → None

Sets the parameters for the Volume-delay function.

Parameter values can be scalars (same values for the entire network) or network field names (link-specific values) - Examples: {'alpha': 0.15, 'beta': 4.0} or {'alpha': 'alpha', 'beta': 'beta'}

**Arguments**

**par** (*dict*): Dictionary with all parameters for the chosen VDF

**skim\_congested** (*skim\_fields=None, return\_matrices=False*) → dict | None

Skims the congested network. The user can add a list of skims to be computed, which will be added to the congested time and the assignment cost from the last iteration of the assignment.

The matrices are always stored internally in the AequilibraE objects to be saved to the project if needed. If return\_matrices is set to True, the matrices are also returned.

**Arguments**

**skim\_fields** (*Union[None, str]*): Name of the skims to use. If None, uses default only

**return\_matrices** (*Bool*): Returns a dictionary with skims. Defaults to False.

**all\_algorithms** = ['all-or-nothing', 'msa', 'frank-wolfe', 'fw', 'cfw', 'bfw']

**bpr\_parameters** = ['alpha', 'beta']

**aequilibrae.paths.TransitAssignment**

**class** aequilibrae.paths.**TransitAssignment** (\*args, project=None, \*\*kwargs)

**\_\_init\_\_** (\*args, project=None, \*\*kwargs)

**Methods**

<code>__init__(*args[, project])</code>	
<code>add_class(transport_class)</code>	Adds a Transport class to the assignment
<code>algorithms_available()</code>	Returns all algorithms available for use
<code>execute([log_specification])</code>	Processes assignment
<code>get_skim_results()</code>	Prepares the assignment skim results for all classes
<code>info()</code>	Returns information for the transit assignment procedure
<code>log_specification()</code>	
<code>report()</code>	Returns the assignment convergence report
<code>results()</code>	Prepares the assignment results as a Pandas DataFrame
<code>save_results(table_name[, keep_zero_flows, ...])</code>	Saves the assignment results to results_database.sqlite
<code>set_algorithm(algorithm)</code>	Chooses the assignment algorithm.
<code>set_classes(classes)</code>	Sets Transport classes to be assigned
<code>set_cores(cores)</code>	Allows one to set the number of cores to be used AFTER transit classes have been added
<code>set_frequency_field(frequency_field)</code>	Sets the graph field that contains the frequency -> e.g. 'freq'.
<code>set_skimming_fields([skimming_fields])</code>	Sets the skimming fields for the transit assignment.
<code>set_time_field(time_field)</code>	Sets the graph field that contains free flow travel time -> e.g. 'trav_time'.

**Attributes**

<code>all_algorithms</code>
-----------------------------

**add\_class** (transport\_class: TransportClassBase) → None

Adds a Transport class to the assignment

**Arguments**

**transport\_class** (TransportClassBase): Transport class

**algorithms\_available** () → list

Returns all algorithms available for use

**Returns**

list: List of string values to be used with **set\_algorithm**

**execute** (log\_specification=True) → None

Processes assignment

**get\_skim\_results()** → list

Prepares the assignment skim results for all classes

**Returns**

**skim list** (list): Lists of all skims with the results for each class

**info()** → dict

Returns information for the transit assignment procedure

Dictionary contains keys 'Algorithm', 'Classes', 'Computer name', 'Procedure ID'.

The classes key is also a dictionary with all the user classes per transit class and their respective matrix totals

**Returns**

**info** (dict): Dictionary with summary information

**log\_specification()**

**report()** → DataFrame

Returns the assignment convergence report

**Returns**

**DataFrame** (pd.DataFrame): Convergence report

**results()** → DataFrame

Prepares the assignment results as a Pandas DataFrame

**Returns**

**DataFrame** (pd.DataFrame): Pandas DataFrame with all the assignment results indexed on *link\_id*

**save\_results** (table\_name: str, keep\_zero\_flows=True, project=None) → None

Saves the assignment results to results\_database.sqlite

Method fails if table exists

**Arguments**

**table\_name** (str): Name of the table to hold this assignment result

**keep\_zero\_flows** (bool): Whether we should keep records for zero flows. Defaults to True

**project** (Project, Optional): Project we want to save the results to. Defaults to the active project

**set\_algorithm** (algorithm: str)

Chooses the assignment algorithm. Currently only 'optimal-strategies' is available.

'os' is also accepted as an alternative to 'optimal-strategies'

**Arguments**

**algorithm** (str): Algorithm to be used

**set\_classes** (classes: List[TransportClassBase]) → None

Sets Transport classes to be assigned

**Arguments**

**classes** (List[TransportClassBase]): List of TransportClass's for assignment

**set\_cores** (cores: int) → None

Allows one to set the number of cores to be used AFTER transit classes have been added

Inherited from AssignmentResultsBase

**Arguments****cores** (*int*): Number of CPU cores to use**set\_frequency\_field** (*frequency\_field: str*) → None

Sets the graph field that contains the frequency -&gt; e.g. 'freq'

**Arguments****frequency\_field** (*str*): Field name**set\_skimming\_fields** (*skimming\_fields: list[str] | None = None*) → None

Sets the skimming fields for the transit assignment.

**Also accepts predefined skimming fields:**

- discrete: 'boardings', 'alightings', 'inner\_transfers', 'outer\_transfers', and 'transfers'.
- continuous: 'trav\_time', 'on\_board\_trav\_time', 'dwelling\_time', 'egress\_trav\_time', 'access\_trav\_time', 'walking\_trav\_time', 'transfer\_time', 'in\_vehicle\_trav\_time', and 'waiting\_time'.

Provide no argument to disable.

**Arguments****skimming\_fields** (*list[str]*): Optional list of field names, or predefined skimming type.**set\_time\_field** (*time\_field: str*) → None

Sets the graph field that contains free flow travel time -&gt; e.g. 'trav\_time'

**Arguments****time\_field** (*str*): Field name**all\_algorithms** = ['optimal-strategies', 'os']**aequilibrae.paths.AssignmentResults****class** aequilibrae.paths.**AssignmentResults**Assignment result holder for a single *TrafficClass* with multiple user classes**\_\_init\_\_**()**Methods**

<code>__init__()</code>	
<code>get_graph_to_network_mapping()</code>	
<code>get_load_results()</code>	Translates the assignment results from the graph format into the network format
<code>get_sl_results()</code>	
<code>prepare(graph, matrix)</code>	Prepares the object with dimensions corresponding to the assignment matrix and graph objects
<code>reset()</code>	Resets object to prepared and pre-computation state
<code>set_cores(cores)</code>	Sets number of cores (threads) to be used in computation
<code>total_flows()</code>	Totals all link flows for this class into a single link load

**get\_graph\_to\_network\_mapping**()

**get\_load\_results()** → DataFrame

Translates the assignment results from the graph format into the network format

**Returns**

**dataset** (pd.DataFrame): Pandas DataFrame data with the traffic class assignment results

**get\_sl\_results()** → DataFrame

**prepare** (graph: Graph, matrix: AequilibraeMatrix) → None

Prepares the object with dimensions corresponding to the assignment matrix and graph objects

**Arguments**

**graph** (Graph): Needs to have been set with number of centroids and list of skins (if any)

**matrix** (AequilibraeMatrix): Matrix properly set for computation with `matrix.computational_view(:obj: `list`)`

**reset()** → None

Resets object to prepared and pre-computation state

**set\_cores** (cores: int) → None

Sets number of cores (threads) to be used in computation

Value of zero sets number of threads to all available in the system, while negative values indicate the number of threads to be left out of the computational effort.

Resulting number of cores will be adjusted to a minimum of zero or the maximum available in the system if the inputs result in values outside those limits

**Arguments**

**cores** (int): Number of cores to be used in computation

**total\_flows()** → None

Totals all link flows for this class into a single link load

Results are placed into `total_link_loads` class member

## aequilibrae.paths.TransitAssignmentResults

**class** aequilibrae.paths.TransitAssignmentResults

Assignment result holder for a single Transit

`__init__()`

### Methods

<code>__init__()</code>	
<code>get_load_results()</code>	Translates the assignment results from the graph format into the network format
<code>prepare(graph, matrix)</code>	Prepares the object with dimensions corresponding to the assignment matrix and graph objects
<code>reset()</code>	Resets object to prepared and pre-computation state
<code>set_cores(cores)</code>	Sets number of cores (threads) to be used in computation

**get\_load\_results ()** → DataFrame

Translates the assignment results from the graph format into the network format

**Returns**

**dataset** (pd.DataFrame): DataFrame data with the transit class assignment results

**prepare** (graph: TransitGraph, matrix: AequilibraeMatrix) → None

Prepares the object with dimensions corresponding to the assignment matrix and graph objects

**Arguments**

**graph** (TransitGraph): Needs to have been set with number of centroids

**matrix** (AequilibraeMatrix): Matrix properly set for computation with matrix.computational\_view(:obj:`list`)

**reset ()** → None

Resets object to prepared and pre-computation state

**set\_cores** (cores: int) → None

Sets number of cores (threads) to be used in computation

Value of zero sets number of threads to all available in the system, while negative values indicate the number of threads to be left out of the computational effort.

Resulting number of cores will be adjusted to a minimum of zero or the maximum available in the system if the inputs result in values outside those limits

**Arguments**

**cores** (int): Number of cores to be used in computation

## aequilibrae.paths.SkimResults

**class** aequilibrae.paths.SkimResults

Network skimming result holder.

```
>>> from aequilibrae.paths.results import SkimResults

>>> project = create_example(project_path)
>>> project.network.build_graphs()

# Mode c is car in this project
>>> car_graph = project.network.graphs['c']

# minimize travel time
>>> car_graph.set_graph('free_flow_time')

# Skims travel time and distance
>>> car_graph.set_skimming(['free_flow_time', 'distance'])

>>> res = SkimResults()
>>> res.prepare(car_graph)

>>> res.skims.export(os.path.join(project_path, "skim_matrices.aem"))
```

**\_\_init\_\_** ()

## Methods

<code>__init__()</code>	
<code>prepare(graph)</code>	Prepares the object with dimensions corresponding to the graph objects

**prepare** (*graph*: Graph)

Prepares the object with dimensions corresponding to the graph objects

### Arguments

**graph** (*Graph*): Needs to have been set with number of centroids and list of skims (if any)

## aequilibrae.paths.PathResults

**class** aequilibrae.paths.PathResults

Path computation result holder

```
>>> from aequilibrae.paths.results import PathResults

>>> project = create_example(project_path)
>>> project.network.build_graphs()

# Mode c is car in this project
>>> car_graph = project.network.graphs['c']

# minimize distance
>>> car_graph.set_graph('distance')

# If you want to compute skims
# It does increase path computation time substantially
>>> car_graph.set_skimming(['distance', 'free_flow_time'])

>>> res = PathResults()
>>> res.prepare(car_graph)
>>> res.compute_path(1, 17)

# Update all the outputs mentioned above for destination 9. Same origin: 1
>>> res.update_trace(9)

# clears all computation results
>>> res.reset()
```

`__init__()` → None

## Methods

<code>__init__()</code>	
<code>compute_path(origin, destination[, ...])</code>	Computes the path between two nodes in the network.
<code>get_heuristics()</code>	Return the available heuristics.
<code>prepare(graph)</code>	Prepares the object with dimensions corresponding to the graph object
<code>reset()</code>	Resets object to prepared and pre-computation state
<code>set_heuristic(heuristic)</code>	Set the heuristics to be used in A*.
<code>update_trace(destination)</code>	Updates the path's nodes, links, skims and mileposts

**compute\_path** (*origin: int, destination: int, early\_exit: bool = False, a\_star: bool = False, heuristic: str | None = None*) → None

Computes the path between two nodes in the network.

A\* heuristics are currently only valid distance cost fields.

### Arguments

**origin** (*int*): Origin for the path

**destination** (*int*): Destination for the path

**early\_exit** (*bool*): Stop constructing the shortest path tree once the destination is found. Doing so may cause subsequent calls to `update_trace` to recompute the tree. Default is `False`.

**a\_star** (*bool*): Whether or not to use A\* over Dijkstra's algorithm. When `True`, `early_exit` is always `True`. Default is `False`.

**heuristic** (*str*): Heuristic to use if `a_star` is enabled. Default is `None`.

**get\_heuristics** () → List[str]

Return the available heuristics.

**prepare** (*graph: Graph*) → None

Prepares the object with dimensions corresponding to the graph object

### Arguments

**graph** (*Graph*): Needs to have been set with number of centroids and list of skims (if any)

**reset** () → None

Resets object to prepared and pre-computation state

**set\_heuristic** (*heuristic: str*) → None

Set the heuristics to be used in A\*. Must be one of `get_heuristics()`.

### Arguments

**heuristic** (*str*): Heuristic to use in A\*.

**update\_trace** (*destination: int*) → None

Updates the path's nodes, links, skims and mileposts

If the previously computed path had `early_exit` enabled, `update_trace` will check if the `destination` has already been found, if not the shortest path tree will be recomputed with the `early_exit` argument passed on.

If the previously computed path had `a_star` enabled, `update_trace` always recomputes the path.

### Arguments

**destination** (*int*): ID of the node we are computing the path to

## 11.6.4 Route choice

<code>HyperpathGenerating(edges[, tail, head, ...])</code>	A class for hyperpath generation.
<code>OptimalStrategies(assign_spec)</code>	
<code>RouteChoice(graph[, project])</code>	
<code>SubAreaAnalysis(graph, subarea, demand[, ...])</code>	

### aequilibrae.paths.HyperpathGenerating

```
class aequilibrae.paths.HyperpathGenerating (edges, tail='tail', head='head', trav_time='trav_time',
                                             freq='freq', check_edges=False, skim_cols=None,
                                             centroids=None)
```

A class for hyperpath generation.

#### Arguments

**edges** (`pandas.DataFrame`): The edges of the graph.

**tail** (`str`): The column name for the tail of the edge (*Optional*, default is “tail”).

**head** (`str`): The column name for the head of the edge (*Optional*, default is “head”).

**trav\_time** (`str`): The column name for the travel time of the edge (*Optional*, default is “trav\_time”).

**freq** (`str`): The column name for the frequency of the edge (*Optional*, default is “freq”).

**check\_edges** (`bool`): If True, check the validity of the edges (*Optional*, default is False).

```
__init__ (edges, tail='tail', head='head', trav_time='trav_time', freq='freq', check_edges=False,
          skim_cols=None, centroids=None)
```

#### Methods

<code>__init__(edges[, tail, head, trav_time, ...])</code>	
<code>assign(origin_column, destination_column, ...)</code>	Assigns demand to the edges of the graph.
<code>check_skim_cols(skim_cols)</code>	
<code>compute_skim_cols(skim_cols, edges, trav_time)</code>	
<code>info()</code>	
<code>run(origin, destination, volume)</code>	
<code>save_results(table_name[, keep_zero_flows, ...])</code>	Saves the assignment results to results_database.sqlite

```
assign (origin_column, destination_column, demand_column, check_demand=False, threads=None)
```

Assigns demand to the edges of the graph.

Assumes the `*_column` arguments are provided as numpy arrays that form a COO sprase matrix.

#### Arguments

**origin\_column** (`np.ndarray`): The column for the origin vertices (*Optional*, default is “orig\_vert\_idx”).

**destination\_column** (`np.ndarray`): The column or the destination vertices (*Optional*, default is “dest\_vert\_idx”).

**demand\_column** (`np.ndarray`): The column for the demand values (*Optional*, default is “demand”).

**check\_demand** (`bool`): If True, check the validity of the demand data (*Optional*, default is False).

**threads** (`int`): The number of threads to use for computation (*Optional*, default is 0, using all available threads).

**check\_skim\_cols** (*skim\_cols: Union(list[str], tuple[str], set(str))*)

**compute\_skim\_cols** (*skim\_cols, edges: DataFrame, trav\_time: str*)

**info** () → dict

**run** (*origin, destination, volume*)

**save\_results** (*table\_name: str, keep\_zero\_flows=True, project=None*) → None

Saves the assignment results to results\_database.sqlite

Method fails if table exists

#### Arguments

**table\_name** (`str`): Name of the table to hold this assignment result

**keep\_zero\_flows** (`bool`): Whether we should keep records for zero flows. Defaults to True

**project** (`Project`, *Optional*): Project we want to save the results to. Defaults to the active project

### aequilibrae.paths.OptimalStrategies

**class** `aequilibrae.paths.OptimalStrategies` (*assig\_spec*)

**\_\_init\_\_** (*assig\_spec*)

#### Methods

**\_\_init\_\_** (*assig\_spec*)

**execute** ()

**execute** ()

**aequilibrae.paths.RouteChoice**

**class** `aequilibrae.paths.RouteChoice` (*graph*: Graph, *project*=None)

`__init__` (*graph*: Graph, *project*=None)

**Methods**

<code>__init__(graph[, project])</code>	
<code>add_demand(demand[, fill])</code>	Add demand DataFrame or matrix for the assignment.
<code>execute([perform_assignment])</code>	Generate route choice sets between the previously supplied nodes, potentially performing an assignment.
<code>execute_from_pandas(df[, recompute_psl])</code>	Perform an assignment using route sets from a Pandas DataFrame.
<code>execute_from_path_files(path_files[, ...])</code>	Perform an assignment from an existing set of path-files.
<code>execute_single(origin, destination[, demand])</code>	Generate route choice sets between origin and destination, potentially performing an assignment.
<code>get_load_results()</code>	Translates the link loading results from the graph format into the network format.
<code>get_results()</code>	Returns the results of the route choice procedure
<code>get_select_link_loading_results()</code>	Get the select link loading results.
<code>get_select_link_od_matrix_results()</code>	Get the select link OD matrix results as a sparse matrix.
<code>info()</code>	Returns information for the transit assignment procedure
<code>log_specification()</code>	
<code>prepare([nodes])</code>	Prepare OD pairs for batch computation.
<code>save_link_flows(table_name[, project])</code>	Saves the link link flows for all classes into the results database.
<code>save_path_files([where])</code>	Save path-files to the directory specific.
<code>save_select_link_flows(table_name[, project])</code>	Saves the select link link flows for all classes into the results database.
<code>set_choice_set_generation([algorithm])</code>	Chooses the assignment algorithm and set its parameters.
<code>set_cores(cores)</code>	Allows one to set the number of cores to be used
<code>set_save_routes([where])</code>	Set save path for route choice results.
<code>set_select_links(links[, link_loading])</code>	Set the selected links.

**Attributes**

<code>all_algorithms</code>
<code>default_parameters</code>
<code>demand_index_names</code>

**add\_demand** (*demand*, *fill*: float = 0.0)

Add demand DataFrame or matrix for the assignment.

**Arguments**

**demand** (`Union[pd.DataFrame, AequilibraeMatrix]`): Demand to add to assignment. If the supplied demand is a DataFrame, it should have a 2-level MultiIndex of Origin and Destination node IDs. If an AequilibraE Matrix is supplied node IDs will be inferred from the index. Demand values should be either `float32`'s or `float64`'s.

**fill** (`float`): Value to fill any `NaN`'s with.

**execute** (`perform_assignment: bool = True`) → None

Generate route choice sets between the previously supplied nodes, potentially performing an assignment.

To access results see `RouteChoice.get_results()`.

**Arguments**

**perform\_assignment** (`bool`): Whether or not to perform an assignment. Defaults to `False`.

**execute\_from\_pandas** (`df: DataFrame, recompute_psl: bool = False`) → None

Perform an assignment using route sets from a Pandas DataFrame.

Requires the DataFrame contains the `origin id`, `destination id` and `route set` columns. The route sets must be a list of links IDs stored as integers with the direction encoded as the sign. Additionally, when `recompute_psl` is `False`, the `probability` column must also be present.

When `recompute_psl` is `True`, the path-sized logit is recomputed for each route with respect to the graphs current cost field and the `beta` and `cutoff_prob` parameters.

All origin and destination IDs within the DataFrame must exist within the demand matrix.

All link IDs and directions must exist within the graph. Links must also be present within the compressed graph.

If `recompute_psl` is `False` the table returned from `self.get_results()` will have all zeros for the cost and path overlap fields, and all `True` for the mask field. If `recompute_psl` is `True` these fields will be recalculated as required.

**execute\_from\_path\_files** (`path_files: Path | str, recompute_psl: bool = False`) → None

Perform an assignment from an existing set of path-files.

This method expects the path-files to be written by the `self.save_path_files()` method, however any parquet hive dataset with the correct structure is accepted. This allows the use of AequilibraE's path-sized logit, link loading, select link analysis, and assignment while using externally generated routes.

**execute\_single** (`origin: int, destination: int, demand: float = 0.0`) → `List[Tuple[int]]`

Generate route choice sets between origin and destination, potentially performing an assignment.

Does not require preparation.

Node IDs must be present in the compressed graph. To make a node ID always appear in the compressed graph add it as a centroid.

**Arguments**

**origin** (`int`): Origin node ID.

**destination** (`int`): Destination node ID.

**demand** (`float`): If provided an assignment will be performed with this demand.

**Returns**

**route set** (`List[Tuple[int]]`): A list of routes as tuples of link IDs.

**get\_load\_results** () → DataFrame

Translates the link loading results from the graph format into the network format.

**Returns**

**dataset** (Union[Tuple[pd.DataFrame, pd.DataFrame], pd.DataFrame]): A tuple of link loading results as DataFrames. Columns are the matrix name concatenated direction.

**get\_results** () → DataFrame

Returns the results of the route choice procedure

Returns a table of OD pairs to lists of link IDs for each OD pair provided (as columns). Represents paths from origin to destination. When the link id in the route set is positive it represents the ab direction, while negative represents the ba direction.

**Returns**

**results** (pd.DataFrame): Table with the results of the route choice procedure

**get\_select\_link\_loading\_results** () → DataFrame

Get the select link loading results.

**Returns**

**dataset** (Tuple[pd.DataFrame, pd.DataFrame]): Select link loading results as DataFrames. Columns are the matrix name concatenated with the select link set and direction.

**get\_select\_link\_od\_matrix\_results** () → Dict[str, Dict[str, coo\_matrix]]

Get the select link OD matrix results as a sparse matrix.

**Returns**

**select link OD matrix results** (Dict[str, Dict[str, scipy.sparse.coo\_matrix]]): Returns a dict of select link set names to a dict of demand column names to a sparse OD matrix

**info** () → dict

Returns information for the transit assignment procedure

Dictionary contains keys:

- Algorithm,
- Matrix totals
- Computer name
- Procedure ID
- Parameters
- Select links

The classes key is also a dictionary with all the user classes per transit class and their respective matrix totals.

**Returns**

**info** (dict): Dictionary with summary information

**log\_specification** ()

**prepare** (nodes: List[int] | List[Tuple[int, int]] | None = None) → None

Prepare OD pairs for batch computation.

**Arguments**

**nodes** (Union[list[int], list[tuple[int, int]]]): List of node IDs to operate on. If a 1D list is provided, OD pairs are taken to be all pair permutations of the list. If a list of pairs is provided OD pairs are taken as is. All node IDs must be present in the compressed graph. To make a node ID always appear in the compressed graph add it as a centroid. Duplicates will be dropped on execution. If None is provided, all OD pairs with non-zero flows will be used.

**save\_link\_flows** (*table\_name*: str, *project*=None) → None

Saves the link link flows for all classes into the results database.

#### Arguments

**table\_name** (str): Name of the table being inserted to.

**project** (Project, *Optional*): Project we want to save the results to. Defaults to the active project

**save\_path\_files** (*where*: Path | None = None)

Save path-files to the directory specific.

Files will be saved as a parquet hive dataset partitioned by the origin ID. Existing path-files will not be removed to allow incremental route choice set generation.

#### Arguments

**where** (Optional[pathlib.Path]): Directory to save the dataset to.

**save\_select\_link\_flows** (*table\_name*: str, *project*=None) → None

Saves the select link link flows for all classes into the results database. Additionally, it exports the OD matrices into OMX format.

#### Arguments

**table\_name** (str): Name of the table being inserted to and the name of the OpenMatrix file used for OD matrices.

**project** (Project, *Optional*): Project we want to save the results to. Defaults to the active project

**set\_choice\_set\_generation** (*algorithm*: str | None = None, *\*\*kwargs*) → None

Chooses the assignment algorithm and set its parameters.

Options for algorithm are 'bfsle' for breadth first search with link removal, or 'link-penalisation'/link-penalization'. 'lp' is also accepted as an alternative to 'link-penalisation'. If *algorithm* is None, none will be set, but the parameters will be updated. This is useful when assigning from path-files.

BFSLE implementation based on "Route choice sets for very high-resolution data" by Nadine Rieser-Schüssler, Michael Balmer & Kay W. Axhausen (2013). DOI: [10.1080/18128602.2012.671383](https://doi.org/10.1080/18128602.2012.671383).

Setting the parameters for the route choice:

- *seed* is a BFSLE specific parameters.
- Although not required, setting *max\_depth* or *max\_misses*, is strongly recommended to prevent run-away algorithms.
- *max\_misses* is the maximum amount of duplicate routes found per OD pair. If a set of routes is returned in a case where *max\_misses* is exceeded, the number of routes may be fewer than *max\_routes*. Assumes a default value of 100.
- When using **BFSLE** *max\_depth* corresponds to the maximum height of the graph. It's value is largely dependent on the size of the paths within the network. For very small networks a value of 10 is a recommended starting point. For large networks a good starting value is 5. Increase the value until the number of desired routes is being consistently returned. If a set of routes is returned in a case where *max\_depth* is exceeded, the number of routes may be fewer than *max\_routes*.
- When using **LP**, *max\_depth* corresponds to the maximum number of iterations performed. While not enforced, it should be higher than *max\_routes*. It's value is dependent on the magnitude of the cost field, specifically if it's related to the log base *penalty* of the ratio of costs between two alternative routes. If a set of routes is returned in a case where *max\_depth* is exceeded, the number of routes may be fewer than *max\_routes*.

- Additionally BFSLE has the option to incorporate link penalisation. Every link in all routes found at a depth are penalised with the penalty factor for the next depth. So at a depth of 0 no links are penalised nor removed. At depth 1, all links found at depth 0 are penalised, then the links marked for removal are removed. All links in the routes found at depth 1 are then penalised for the next depth. The penalisation compounds. Set `penalty=1.0` to disable.
- When performing an assignment, `cutoff_prob` can be provided to exclude routes from the path-sized logit model. The `cutoff_prob` is used to compute an inverse binary logit and obtain a max difference in utilities. If a paths total cost is greater than the minimum cost path in the route set plus the max difference, the route is excluded from the PSL calculations. The route is still returned, but with a probability of 0.0.
- The `cutoff_prob` should be in the range `[0, 1]`. It is then rescaled internally to `[0.5, 1]` as probabilities below 0.5 produce negative differences in utilities because the choice is between two routes only, one of which is the shortest path. A higher `cutoff_prob` includes less routes. A value of 1.0 will only include the minimum cost route. A value of 0.0 includes all routes.

#### Arguments

**algorithm** (`str`): Algorithm to be used

**kwargs** (`dict`): Dictionary with all parameters for the algorithm

**set\_cores** (`cores: int`) → None

Allows one to set the number of cores to be used

Inherited from `AssignmentResultsBase`

#### Arguments

**cores** (`int`): Number of CPU cores to use

**set\_save\_routes** (*where: str | None = None*) → None

Set save path for route choice results. Provide `None` to disable.

#### Arguments

**save\_it** (`bool`): Boolean to indicate whether routes should be saved

**set\_select\_links** (`links: Dict[Hashable, List[Tuple[int, int] | List[Tuple[int, int]]]`, `link_loading=True`)

Set the selected links. Checks if the links and directions are valid. Supports **OR** and **AND** sets of links.

Dictionary values should be a list of either a single `(link_id, direction)` tuple or a list of `(link_id, direction)`.

The elements of the first list represent the **AND** sets, together they are OR'ed. If any of these sets is satisfied the link are loaded as appropriate.

The **AND** sets are comprised of either a single `(link_id, direction)` tuple or a list of `(link_id, direction)`. The single tuple represents an **AND** set with a single element.

All links and directions in an **AND** set must appear in any order within a route for it to be considered satisfied.

Supply `links=None` to disable select link analysis.

#### Arguments

**links** (`Union[None, Dict[Hashable, List[Union[Tuple[int, int], List[Tuple[int, int]]]]]`): Name of link set and link IDs and directions to be used in select link analysis.

**link\_loading** (`bool`): Enable select link loading. If disabled only OD matrix results are available.

```

all_algorithms = ['bfsle', 'lp', 'link-penalisation', 'link-penalization']

default_parameters = {'bfsle': {'penalty': 1.0}, 'generic': {'beta': 1.0,
'cutoff_prob': 0.0, 'max_depth': 0, 'max_misses': 100, 'max_routes': 0,
'penalty': 1.01, 'seed': 0, 'store_results': True}, 'link-penalisation': {}}

demand_index_names = ['origin id', 'destination id']

```

## aequilibrae.paths.SubAreaAnalysis

**class** `aequilibrae.paths.SubAreaAnalysis` (*graph*: Graph, *subarea*: GeoDataFrame, *demand*: DataFrame | AequilibraeMatrix, *project*=None)

**\_\_init\_\_** (*graph*: Graph, *subarea*: GeoDataFrame, *demand*: DataFrame | AequilibraeMatrix, *project*=None)

Construct a sub-area matrix from a provided sub-area GeoDataFrame using route choice.

This class aims to provide a semi-automated method for constructing the sub-area matrix. The user should provide the Graph object, demand matrix, and a GeoDataFrame whose geometry union represents the desired sub-area. Perform a route choice assignment, then call the `post_process` method to obtain a sub-area matrix.

Check how to run sub-area analysis [here](#).

### Arguments

**graph** (*Graph*): AequilibraE graph object to use

**subarea** (*gpd.GeoDataFrame*): A GeoPandas GeoDataFrame whose geometry union represents the sub-area.

**demand** (*Union[pandas.DataFrame, AequilibraeMatrix]*): The demand matrix to provide to the route choice assignment.

### Methods

<code>__init__(graph, subarea, demand[, project])</code>	Construct a sub-area matrix from a provided sub-area GeoDataFrame using route choice.
<code>post_process([demand_cols, keep_original_ods])</code>	Apply the necessary post processing to the route choice assignment select link results.

**post\_process** (*demand\_cols*=None, *keep\_original\_ods*: bool = False)

Apply the necessary post processing to the route choice assignment select link results.

### Arguments

**demand\_cols** (*Optional: [list[str]]*): If provided, only construct the sub-area matrix for these demand matrices.

**keep\_original\_ods** (*Optional: bool*): If provided, the original origin and destination IDs for the demand will be kept. This will create a significantly larger demand matrix but is more flexible.

### Returns

**sub\_area\_demand** (*pd.DataFrame*): A DataFrame representing the sub-area demand matrix.

## 11.7 Transit

<code>Transit(project)</code>	
<code>TransitGraphBuilder(public_transport_conn[, ...])</code>	Graph builder for the transit assignment Spiess & Florian algorithm.
<code>lib_gtfs.GTFSRouteSystemBuilder(network, ...)</code>	

### 11.7.1 aequilibrae.transit.Transit

**class** `aequilibrae.transit.Transit` (*project*)

`__init__` (*project*)

#### Arguments

**project** (`Project`, *Optional*): The Project to connect to. By default, uses the currently active project

#### Methods

<code>__init__(project)</code>	
<code>build_pt_preload(start, end[, inclusion_cond])</code>	Builds a preload vector for the transit network over the specified time period
<code>create_graph(**kwargs)</code>	Create a transit graph from an existing GTFS import.
<code>create_transit_database()</code>	Creates the public transport database
<code>get_table(table_name)</code>	
<code>load([period_ids])</code>	Load the previously saved transit graphs from the 'public_transport.sqlite' database.
<code>new_gtfs_builder(agency, file_path[, day, ...])</code>	Returns a <code>GTFSRouteSystemBuilder</code> object compatible with the project
<code>remove_graphs(period_ids[, unload])</code>	Remove the previously saved transit graphs from the 'public_transport.sqlite' database.
<code>save_graphs([period_ids, force])</code>	Save the previously build transit graphs to the 'public_transport.sqlite' database.

#### Attributes

<code>default_capacities</code>
<code>default_pces</code>
<code>graphs</code>
<code>transit</code>
<code>pt_con</code>

**build\_pt\_preload** (*start: int, end: int, inclusion\_cond: str = 'start'*) → DataFrame

Builds a preload vector for the transit network over the specified time period

#### Arguments

**start** (*int*): The start of the period for which to check pt schedules (seconds from midnight)

**end** (*int*): The end of the period for which to check pt schedules, (seconds from midnight)

**inclusion\_cond** (*str*): Specifies condition with which to include/exclude pt trips from the preload.

#### Returns

**preloads** (*pd.DataFrame*): A DataFrame of preload from transit vehicles that can be directly used in an assignment

```
>>> project = create_example(project_path, "coquimbo")
>>> project.network.build_graphs()
>>> start = int(6.5 * 60 * 60) # 6:30 am
>>> end = int(8.5 * 60 * 60) # 8:30 am
>>> transit = Transit(project)
>>> preload = transit.build_pt_preload(start, end)
```

**create\_graph** (*\*\*kwargs*) → *TransitGraphBuilder*

Create a transit graph from an existing GTFS import.

All arguments are forwarded to ‘TransitGraphBuilder’.

A ‘period\_id’ may be specified to select a time period. By default, a whole day is used. See ‘project.network.Periods’ for more details.

**create\_transit\_database** ()

Creates the public transport database

**get\_table** (*table\_name*) → DataFrame

**load** (*period\_ids: List[int] | None = None*)

Load the previously saved transit graphs from the ‘public\_transport.sqlite’ database. Loading may be filtered by ‘period\_id’.

#### Arguments

**period\_ids** (*int*): List of periods of to load. Defaults to all available graph configurations.

**new\_gtfs\_builder** (*agency, file\_path, day="", description=""*) → *GTFSRouteSystemBuilder*

Returns a *GTFSRouteSystemBuilder* object compatible with the project

#### Arguments

**agency** (*str*): Name for the agency this feed refers to (e.g. ‘CTA’)

**file\_path** (*str*): Full path to the GTFS feed (e.g. ‘D:/project/my\_gtfs\_feed.zip’)

**day** (*str, Optional*): Service data contained in this field to be imported (e.g. ‘2019-10-04’)

**description** (*str, Optional*): Description for this feed (e.g. ‘CTA2019 fixed by John Doe’)

#### Returns

**gtfs\_feed** (*StaticGTFS*): A GTFS feed that can be added to this network

**remove\_graphs** (*period\_ids*: List[int], *unload*: bool = False)

Remove the previously saved transit graphs from the 'public\_transport.sqlite' database. Removing may be filtered by 'period\_id'.

#### Arguments

**period\_ids** (int): List of periods of to save. **unload** (bool): Also unload the graph.

**save\_graphs** (*period\_ids*: List[int] | None = None, *force*: bool = False)

Save the previously build transit graphs to the 'public\_transport.sqlite' database. Saving may be filtered by 'period\_id'.

#### Arguments

**period\_ids** (int): List of periods of to save. Defaults to 'project.network.periods.default\_period.period\_id'. **force** (bool): Remove the existing graphs before saving the 'period\_ids' graphs. Default 'False'.

```
default_capacities = {'other': [30, 60], 0: [150, 300], 1: [280, 560], 11: [30, 60], 12: [50, 100], 2: [700, 700], 3: [30, 60], 4: [400, 800], 5: [20, 40]}
```

```
default_pces = {'other': 2.0, 0: 5.0, 1: 5.0, 11: 3.0, 3: 4.0, 5: 4.0}
```

```
graphs: Dict[str, TransitGraph] = {}
```

```
pt_con: Connection
```

```
transit = <aequilibrae.utils.python_signal.PythonSignal object>
```

## 11.7.2 aequilibrae.transit.TransitGraphBuilder

```
class aequilibrae.transit.TransitGraphBuilder (public_transport_conn: Connection, period_id: int = 1,
time_margin: int = 0, projected_crs: str = 'EPSG:3857',
num_threads: int = -1, seed: int | None = None,
geometry_noise: bool | None = None, noise_coef: float |
None = None, with_inner_stop_transfers: bool = False,
with_outer_stop_transfers: bool = False,
with_walking_edges: bool = True,
distance_upper_bound: float = inf,
blocking_centroid_flows: bool = True,
connector_method: str = 'nearest_neighbour',
max_connectors_per_zone: int = -1)
```

Graph builder for the transit assignment Spiess & Florian algorithm.

#### Arguments

**public\_transport\_conn** (sqlite3.Connection): Connection to the public\_transport.sqlite database.

**period\_id** (int): Period id for the period to be used. Preferred over start and end.

**time\_margin** (int): Time margin, extends the start and end times by time\_margin ([start, end] becomes [start - time\_margin, end + time\_margin]), in order to include more trips when computing mean values. Defaults to 0.

**projected\_crs** (str): Projected CRS of the network, intended for more accurate distance calculations. Defaults to "EPSG:3857", Spherical Mercator.

**num\_threads** (int): Number of threads to be used where possible. Defaults to -1, using all available threads.

**seed** (int): Deprecated. No longer in use.

**geometry\_noise** (bool): Deprecated. No longer in use.

**noise\_coef** (float): Deprecated. No longer in use.

**with\_inner\_stop\_transfers** (bool): Whether to create transfer edges within parent stations. Defaults to False.

**with\_outer\_stop\_transfers** (bool): Whether to create transfer edges between parent stations. Defaults to False.

**with\_walking\_edges** (bool): Whether to create walking edges between distinct stops of each station. Defaults to True.

**distance\_upper\_bound** (float): Upper bound on connector distance. Defaults to `np.inf`.

**blocking\_centroid\_flows** (bool): Whether to block flow through centroids. Defaults to True.

**max\_connectors\_per\_zone** (int): Maximum connectors per zone. Defaults to -1 for unlimited.

**\_\_init\_\_** (*public\_transport\_conn: Connection, period\_id: int = 1, time\_margin: int = 0, projected\_crs: str = 'EPSG:3857', num\_threads: int = -1, seed: int | None = None, geometry\_noise: bool | None = None, noise\_coef: float | None = None, with\_inner\_stop\_transfers: bool = False, with\_outer\_stop\_transfers: bool = False, with\_walking\_edges: bool = True, distance\_upper\_bound: float = inf, blocking\_centroid\_flows: bool = True, connector\_method: str = 'nearest\_neighbour', max\_connectors\_per\_zone: int = -1*)

## Methods

<code>__init__(public_transport_conn[, period_id, ...])</code>	
<code>add_zones(zones[, from_crs])</code>	Add zones as ODs.
<code>convert_demand_matrix_from_zone_to_node</code>	Convert a sparse demand matrix from <code>zone_id</code> 's to the corresponding <code>node_id</code> 's.
<code>create_additional_db_fields()</code>	Create the additional required entries in the tables.
<code>create_graph()</code>	Create the SF transit graph (vertices and edges).
<code>create_line_geometry([method, graph])</code>	Create the LineString for each edge.
<code>create_od_node_mapping()</code>	Build a dataframe mapping the centroid node ids with to transport assignment zone ids.
<code>from_db(public_transport_conn, period_id, ...)</code>	Create a SF graph instance from an existing database save.
<code>remove(pt_conn, period_id)</code>	
<code>remove_config(conn, period_id)</code>	Remove a transit graph configuration from the project database specified by its 'period_id'.
<code>remove_edges(pt_conn, period_id)</code>	Remove a transit graph's edges from the public transport database specified by its 'period_id'.
<code>remove_vertices(pt_conn, period_id)</code>	Remove a transit graph's vertices from the public transport database specified by its 'period_id'.
<code>save([robust])</code>	Save the current graph to the public transport database.
<code>save_config()</code>	
<code>save_edges([recreate_line_geometry])</code>	Save the contents of <code>self.edges</code> to the public transport database.
<code>save_vertices([robust])</code>	Write the vertices DataFrame to the public transport database.
<code>to_transit_graph()</code>	Create an AequilibraE <code>TransitGraph</code> object from an SF graph builder.

## Attributes

```
config
```

**add\_zones** (*zones*, *from\_crs*: str | None = None)

Add zones as ODs.

**Arguments**

**zones** (pd.DataFrame): DataFrame containing the zoning information. Columns must include `zone_id` and `geometry`.

**from\_crs** (str): The CRS of the `geometry` column of `zones`. If not provided it's assumed that the geometry is already in `self.projected_crs`. If provided, the geometry will be projected to `self.projected_crs`. Defaults to None.

**convert\_demand\_matrix\_from\_zone\_to\_node\_ids** (*demand\_matrix*, *o\_zone\_col*='origin\_zone\_id',  
*d\_zone\_col*='destination\_zone',  
*demand\_col*='demand')

Convert a sparse demand matrix from `zone_id`'s to the corresponding `node_id`'s.

**create\_additional\_db\_fields** ()

Create the additional required entries in the tables.

**create\_graph** ()

Create the SF transit graph (vertices and edges).

**create\_line\_geometry** (*method*='direct', *graph*='w')

Create the LineString for each edge.

The direct method creates a straight line between all points.

The connect project match method uses the existing line geometry within the project to create more accurate line strings. It creates a line string that matches the path between the shortest path between the project nodes closest to either end of the access and egress connectors.

Project graphs must be built for the "connector project match" method.

**Arguments**

**method** (str): Must be either "direct" or "connector project match". If method is "direct", `graph` argument is ignored.

**graph** (str): Must be a key within `project.network.graphs`.

**create\_od\_node\_mapping** ()

Build a dataframe mapping the centroid node ids with to transport assignment zone ids.

**classmethod from\_db** (*public\_transport\_conn*, *period\_id*: int, *\*\*kwargs*)

Create a SF graph instance from an existing database save.

Assumes the database was constructed with the provided save methods. No checks are performed to see if the provided arguments are compatible with the saved graph.

All arguments are forwarded to the constructor.

**Arguments**

**public\_transport\_conn** (sqlite3.Connection): Connection to the 'public\_transport.sqlite' database.

**classmethod** `remove` (*pt\_conn*: *Connection*, *period\_id*: *int*)

**static** `remove_config` (*conn*: *Connection*, *period\_id*: *int*)

Remove a transit graph configuration from the project database specified by its 'period\_id'.

**Arguments**

**conn** (*sqlite3.Connection*): Connection to the `project.sqlite` database. **period\_id** (*int*): 'period\_id' key for the 'transit\_graph\_configs' table.

**static** `remove_edges` (*pt\_conn*: *Connection*, *period\_id*: *int*)

Remove a transit graph's edges from the public transport database specified by its 'period\_id'.

**Arguments**

**pt\_conn** (*sqlite3.Connection*): Connection to the `public_transport.sqlite` database. **period\_id** (*int*): `period_id` to remove.

**static** `remove_vertices` (*pt\_conn*: *Connection*, *period\_id*: *int*)

Remove a transit graph's vertices from the public transport database specified by its 'period\_id'.

**Arguments**

**pt\_conn** (*sqlite3.Connection*): Connection to the `public_transport.sqlite` database. **period\_id** (*int*): `period_id` to remove.

**save** (*robust=True*)

Save the current graph to the public transport database.

**Arguments**

**robust** (*bool*): Deprecated. No longer in use.

**save\_config** ()

**save\_edges** (*recreate\_line\_geometry=False*)

Save the contents of `self.edges` to the public transport database.

If no geometry for the edges is present or `recreate_line_geometry` is `True`, direct lines will be created.

**Arguments**

**recreate\_line\_geometry** (*bool*): Whether to recreate the line strings for the edges as direct lines. Defaults to `False`.

**save\_vertices** (*robust=None*)

Write the vertices `DataFrame` to the public transport database.

Within the database nodes may not exist at the exact same point in space, provide `robust=True` to move the nodes slightly.

**Arguments**

**robust** (*bool*): Deprecated. No longer in use.

**to\_transit\_graph** () → *TransitGraph*

Create an AequilibraE `TransitGraph` object from an SF graph builder.

**property** `config`

### 11.7.3 `aequilibrae.transit.lib_gtfs.GTFSRouteSystemBuilder`

**class** `aequilibrae.transit.lib_gtfs.GTFSRouteSystemBuilder` (*network*, *agency\_identifier*, *file\_path*, *day=""*, *description=""*, *capacities=None*, *pces=None*)

`__init__(network, agency_identifier, file_path, day="", description="", capacities=None, pces=None)`

Instantiates a transit class for the network

#### Arguments

**local network** (`Network`): Supply model to which this GTFS will be imported

**agency\_identifier** (`str`): ID for the agency this feed refers to (e.g. 'CTA')

**file\_path** (`str`): Full path to the GTFS feed (e.g. 'D:/project/my\_gtfs\_feed.zip')

**day** (`str`, *Optional*): Service data contained in this field to be imported (e.g. '2019-10-04')

**description** (`str`, *Optional*): Description for this feed (e.g. 'CTA19 fixed by John after coffee')

#### Methods

<code>__init__(network, agency_identifier, file_path)</code>	Instantiates a transit class for the network
<code>builds_link_graphs_with_broken_stops()</code>	Build the graph for links for a certain mode while splitting the closest links at stops' projection
<code>dates_available()</code>	Returns a list of all dates available for this feed.
<code>doWork()</code>	Alias for <code>execute_import</code>
<code>execute_import()</code>	
<code>load_date(service_date)</code>	Loads the transit services available for <i>service_date</i>
<code>map_match([route_types])</code>	Performs map-matching for all routes of one or more types.
<code>save_to_disk()</code>	Saves all transit elements built in memory to disk
<code>set_agency_identifier(agency_id)</code>	Adds agency ID to this GTFS for use on import.
<code>set_allow_map_match([allow])</code>	Changes behavior for finding transit-link shapes.
<code>set_capacities(capacities)</code>	Sets default capacities for modes/vehicles.
<code>set_date(service_date)</code>	Sets the date for import without doing any of data processing, which is left for the importer
<code>set_description(description)</code>	Adds description to be added to the imported layers metadata
<code>set_feed(feed_path)</code>	Sets GTFS feed source to be used.
<code>set_maximum_speeds(max_speeds)</code>	Sets the maximum speeds to be enforced at segments.
<code>set_pces(pces)</code>	Sets default passenger car equivalent (PCE) factor for each GTFS mode.

#### Attributes

<code>signal</code>	Container for GTFS feeds providing data retrieval for the importer
---------------------	--

`builds_link_graphs_with_broken_stops()`

Build the graph for links for a certain mode while splitting the closest links at stops' projection

#### Arguments

**mode\_id** (`int`): Mode ID for which we will build the graph for

`dates_available()` → list

Returns a list of all dates available for this feed.

#### Returns

**feed dates** (`list`): list of all dates available for this feed

**doWork ()**

Alias for `execute_import`

**execute\_import ()**

**load\_date** (*service\_date: str*) → None

Loads the transit services available for *service\_date*

**Arguments**

**service\_date** (*str*): Service data contained in this field to be imported (e.g. '2019-10-04')

**map\_match** (*route\_types=[3]*) → None

Performs map-matching for all routes of one or more types.

Defaults to map-matching Bus routes (type 3) only.

For a reference of route types, see the inputs for [route\\_type](#) here.

**Arguments**

**route\_types** (*List[int]* or *Tuple[int]*): Default is [3], for bus only

**save\_to\_disk ()**

Saves all transit elements built in memory to disk

**set\_agency\_identifier** (*agency\_id: str*) → None

Adds agency ID to this GTFS for use on import.

**Arguments**

**agency\_id** (*str*): ID for the agency this feed refers to (e.g. 'CTA')

**set\_allow\_map\_match** (*allow=True*)

Changes behavior for finding transit-link shapes. Defaults to `True`.

**Arguments**

**allow** (*bool Optional*): If `True`, allows uses map-matching in search of precise `transit_link` shapes. If `False`, sets `transit_link` shapes equal to straight lines between stops. In the presence of GTFS raw shapes it has no effect.

**set\_capacities** (*capacities: dict*)

Sets default capacities for modes/vehicles.

**Arguments**

**capacities** (*dict*): Dictionary with GTFS types as keys, each with a list of 3 items for values for capacities: seated and total i.e. -> "{0: [150, 300],...}"

**set\_date** (*service\_date: str*) → None

Sets the date for import without doing any of data processing, which is left for the importer

**set\_description** (*description: str*) → None

Adds description to be added to the imported layers metadata

**Arguments**

**description** (*str*): Description for this feed (e.g. 'CTA2019 fixed by John Doe after strong coffee')

**set\_feed** (*feed\_path: str*) → None

Sets GTFS feed source to be used.

**Arguments**

**file\_path** (*str*): Full path to the GTFS feed (e.g. 'D:/project/my\_gtfs\_feed.zip')

**set\_maximum\_speeds** (*max\_speeds: DataFrame*)

Sets the maximum speeds to be enforced at segments.

**Arguments**

**max\_speeds** (*pd.DataFrame*): Requires 4 fields: mode, min\_distance, max\_distance, speed. Modes not covered in the data will not be touched and distance brackets not covered will receive the maximum speed, with a warning

**set\_pces** (*pces: dict*)

Sets default passenger car equivalent (PCE) factor for each GTFS mode.

**Arguments**

**pces** (*dict*): Dictionary with GTFS types as keys and the corresponding PCE value i.e. -> “{0: 2.0,...}”

**signal** = `<aequilibrae.utils.python_signal.PythonSignal object>`

Container for GTFS feeds providing data retrieval for the importer

## 11.8 Utils

```
create_delaunay_network.  
DelaunayAnalysis(project)  
create_example
```

### 11.8.1 aequilibrae.utils.create\_delaunay\_network.DelaunayAnalysis

**class** `aequilibrae.utils.create_delaunay_network.DelaunayAnalysis` (*project*)

**\_\_init\_\_** (*project*)

Start a Delaunay analysis

**Arguments**

**project** (*Project*): The Project to connect to

**Methods**

<code>__init__(project)</code>	Start a Delaunay analysis
<code>assign_matrix(matrix, result_name)</code>	
<code>create_network([source, overwrite])</code>	Creates a delaunay network based on the existing model

**assign\_matrix** (*matrix: AequilibraeMatrix, result\_name: str*)

**create\_network** (*source='zones', overwrite=False*)

Creates a delaunay network based on the existing model

**Arguments**

**source** (*str, Optional*): Source of the centroids/zones. Either `zones` or `network`. Default `zones`

**overwrite path** (*bool, Optional*): Whether to should overwrite an existing Delaunay Network. Default `False`

## 11.8.2 aequilibrae.utils.create\_example

### Functions

<code>create_example(path[, from_model])</code>	Copies an example model to a new project project and returns the project handle
<code>list_examples()</code>	

`aequilibrae.utils.create_example.create_example(path: PathLike, from_model='sioux_falls') → Project`  
Copies an example model to a new project project and returns the project handle

#### Arguments

**path** (str): Path where to create a new model. must be a non-existing folder/directory.

**from\_model** (str, Optional): Example to create from *sioux\_falls*, *nauru* or *coquimbo*. Defaults to *sioux\_falls*

#### Returns

**project** (Project): Aequilibrae Project handle (open)

`aequilibrae.utils.create_example.list_examples() → List[str]`

## 11.9 Parameters

<code>Parameters([project])</code>	Global parameters module.
------------------------------------	---------------------------

### 11.9.1 aequilibrae.Parameters

`class aequilibrae.Parameters (project=None)`

Global parameters module.

Parameters are used in many procedures, and are often defined in the `parameters.yml` file ONLY.

Parameters are organized in the following groups:

- assignment
- distribution
- network \* links \* modes \* nodes \* osm \* gmns
- osm
- system

Please observe that OSM information handled on network is not the same on the OSM group.

```
>>> from aequilibrae import Parameters
>>> project = Project()
>>> project.new(project_path)
>>> p = Parameters(project)
>>> p.parameters['system']['logging_directory'] = "/path_to/other_logging_
```

(continues on next page)

(continued from previous page)

```
→directory"
>>> p.parameters['osm']['overpass_endpoint'] = "http://192.168.0.110:32780/api"
>>> p.parameters['osm']['max_query_area_size'] = 10000000000
>>> p.parameters['osm']['sleeptime'] = 0
>>> p.write_back()

>>> # You can also restore the software default values
>>> p.restore_default()
```

`__init__` (*project=None*)

Loads parameters from file. The place is always the same. The root of the package

## Methods

<code>__init__</code> ([project])	Loads parameters from file.
<code>restore_default</code> ()	Restores parameters to generic default
<code>write_back</code> ()	Writes the parameters back to file

## Attributes

<code>file_default</code>
---------------------------

`restore_default` ()

Restores parameters to generic default

`write_back` ()

Writes the parameters back to file

`file_default`: `str = '/opt/hostedtoolcache/Python/3.10.17/x64/lib/python3.10/site-packages/aequilibrae/parameters.yml'`

## PYTHON MODULE INDEX

### a

`aequilibrae.utils.create_example`, 291



## Non-alphabetical

- `__init__()` (*aequilibrae.distribution.GravityApplication* method), 242
- `__init__()` (*aequilibrae.distribution.GravityCalibration* method), 240
- `__init__()` (*aequilibrae.distribution.Ipf* method), 239
- `__init__()` (*aequilibrae.distribution.SyntheticGravityModel* method), 243
- `__init__()` (*aequilibrae.matrix.AequilibraeMatrix* method), 244
- `__init__()` (*aequilibrae.Parameters* method), 292
- `__init__()` (*aequilibrae.paths.AssignmentResults* method), 269
- `__init__()` (*aequilibrae.paths.Graph* method), 253
- `__init__()` (*aequilibrae.paths.HyperpathGenerating* method), 274
- `__init__()` (*aequilibrae.paths.NetworkSkimming* method), 251
- `__init__()` (*aequilibrae.paths.OptimalStrategies* method), 275
- `__init__()` (*aequilibrae.paths.PathResults* method), 272
- `__init__()` (*aequilibrae.paths.RouteChoice* method), 276
- `__init__()` (*aequilibrae.paths.SkimResults* method), 271
- `__init__()` (*aequilibrae.paths.SubAreaAnalysis* method), 281
- `__init__()` (*aequilibrae.paths.TrafficAssignment* method), 262
- `__init__()` (*aequilibrae.paths.TrafficClass* method), 259
- `__init__()` (*aequilibrae.paths.TransitAssignment* method), 267
- `__init__()` (*aequilibrae.paths.TransitAssignmentResults* method), 270
- `__init__()` (*aequilibrae.paths.TransitClass* method), 260
- `__init__()` (*aequilibrae.paths.TransitGraph* method), 255
- `__init__()` (*aequilibrae.paths.VDF* method), 261
- `__init__()` (*aequilibrae.project.About* method), 213
- `__init__()` (*aequilibrae.project.FieldEditor* method), 214
- `__init__()` (*aequilibrae.project.Log* method), 215
- `__init__()` (*aequilibrae.project.Matrices* method), 216
- `__init__()` (*aequilibrae.project.Network* method), 217
- `__init__()` (*aequilibrae.project.network.Link* method), 235
- `__init__()` (*aequilibrae.project.network.Links* method), 229
- `__init__()` (*aequilibrae.project.network.LinkType* method), 234
- `__init__()` (*aequilibrae.project.network.LinkTypes* method), 228
- `__init__()` (*aequilibrae.project.network.Mode* method), 234
- `__init__()` (*aequilibrae.project.network.Modes* method), 226
- `__init__()` (*aequilibrae.project.network.Node* method), 237
- `__init__()` (*aequilibrae.project.network.Nodes* method), 231
- `__init__()` (*aequilibrae.project.network.Period* method), 238
- `__init__()` (*aequilibrae.project.network.Periods* method), 232
- `__init__()` (*aequilibrae.project.Project* method), 211
- `__init__()` (*aequilibrae.project.tools.network\_simplifier.NetworkSimplifier* method), 224
- `__init__()` (*aequilibrae.project.Zone* method), 223
- `__init__()` (*aequilibrae.project.Zoning* method), 221
- `__init__()` (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 287
- `__init__()` (*aequilibrae.transit.Transit* method), 282
- `__init__()` (*aequilibrae.transit.TransitGraphBuilder* method), 285
- `__init__()` (*aequilibrae.utils.create\_delaunay\_network.DelaunayAnalysis* method), 290

## A

- About (class in *aequilibrae.project*), 213
- `activate()` (*aequilibrae.project.Project* method), 212
- `add()` (*aequilibrae.project.FieldEditor* method), 215
- `add()` (*aequilibrae.project.network.Modes* method), 226
- `add_centroid()` (*aequilibrae.project.Zone* method), 223
- `add_centroids()` (*aequilibrae.project.Zoning* method), 221
- `add_class()` (*aequilibrae.paths.TrafficAssignment* method), 263

- add\_class() (*aequilibrae.paths.TransitAssignment method*), 267  
 add\_demand() (*aequilibrae.paths.RouteChoice method*), 276  
 add\_info\_field() (*aequilibrae.project.About method*), 213  
 add\_mode() (*aequilibrae.project.network.Link method*), 236  
 add\_preload() (*aequilibrae.paths.TrafficAssignment method*), 264  
 add\_zones() (*aequilibrae.transit.TransitGraphBuilder method*), 286  
 AequilibraeMatrix (*class in aequilibrae.matrix*), 244  
 aequilibrae.utils.create\_example\_module, 291  
 algorithms\_available() (*aequilibrae.paths.TrafficAssignment method*), 264  
 algorithms\_available() (*aequilibrae.paths.TransitAssignment method*), 267  
 all\_algorithms (*aequilibrae.paths.RouteChoice attribute*), 280  
 all\_algorithms (*aequilibrae.paths.TrafficAssignment attribute*), 266  
 all\_algorithms (*aequilibrae.paths.TransitAssignment attribute*), 269  
 all\_fields() (*aequilibrae.project.FieldEditor method*), 215  
 all\_modes() (*aequilibrae.project.network.Modes method*), 226  
 all\_types() (*aequilibrae.project.network.LinkTypes method*), 228  
 all\_zones() (*aequilibrae.project.Zoning method*), 221  
 apply() (*aequilibrae.distribution.GravityApplication method*), 243  
 assign() (*aequilibrae.paths.HyperpathGenerating method*), 274  
 assign\_matrix() (*aequilibrae.utils.create\_delaunay\_network.DelaunayAnalysis method*), 290  
 AssignmentResults (*class in aequilibrae.paths*), 269  
 available\_skims() (*aequilibrae.paths.Graph method*), 253  
 available\_skims() (*aequilibrae.paths.TransitGraph method*), 256
- B**
- bpr\_parameters (*aequilibrae.paths.TrafficAssignment attribute*), 266  
 build\_graphs() (*aequilibrae.project.Network method*), 218  
 build\_pt\_preload() (*aequilibrae.transit.Transit method*), 282  
 builds\_link\_graphs\_with\_broken\_stops() (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 288
- C**
- calibrate() (*aequilibrae.distribution.GravityCalibration method*), 241  
 check\_exists() (*aequilibrae.project.Matrices method*), 216  
 check\_file\_indices() (*aequilibrae.project.Project method*), 212  
 check\_skim\_cols() (*aequilibrae.paths.HyperpathGenerating method*), 275  
 clear() (*aequilibrae.project.Log method*), 215  
 clear\_database() (*aequilibrae.project.Matrices method*), 216  
 close() (*aequilibrae.matrix.AequilibraeMatrix method*), 244  
 close() (*aequilibrae.project.Project method*), 212  
 collapse\_links\_into\_nodes() (*aequilibrae.project.tools.network\_simplifier.NetworkSimplifier method*), 225  
 columns() (*aequilibrae.matrix.AequilibraeMatrix method*), 244  
 computational\_view() (*aequilibrae.matrix.AequilibraeMatrix method*), 245  
 compute\_path() (*aequilibrae.paths.Graph method*), 253  
 compute\_path() (*aequilibrae.paths.PathResults method*), 273  
 compute\_path() (*aequilibrae.paths.TransitGraph method*), 256  
 compute\_skim\_cols() (*aequilibrae.paths.HyperpathGenerating method*), 275  
 compute\_skims() (*aequilibrae.paths.Graph method*), 254  
 compute\_skims() (*aequilibrae.paths.TransitGraph method*), 256  
 config (*aequilibrae.paths.TransitGraph property*), 258  
 config (*aequilibrae.transit.TransitGraphBuilder property*), 287  
 connect\_mode() (*aequilibrae.project.network.Node method*), 237  
 connect\_mode() (*aequilibrae.project.Zone method*), 223  
 connect\_mode() (*aequilibrae.project.Zoning method*), 222  
 contents() (*aequilibrae.project.Log method*), 216  
 convert\_demand\_matrix\_from\_zone\_to\_node\_ids() (*aequilibrae.transit.TransitGraphBuilder method*), 286  
 convex\_hull() (*aequilibrae.project.Network method*), 219  
 copy() (*aequilibrae.matrix.AequilibraeMatrix method*), 245

- `copy_link()` (*aequilibrae.project.network.Links* method), 229  
`count_centroids()` (*aequilibrae.project.Network* method), 219  
`count_links()` (*aequilibrae.project.Network* method), 219  
`count_nodes()` (*aequilibrae.project.Network* method), 219  
`coverage()` (*aequilibrae.project.Zoning* method), 222  
`create()` (*aequilibrae.project.About* method), 214  
`create_additional_db_fields()` (*aequilibrae.transit.TransitGraphBuilder* method), 286  
`create_compressed_link_network_mapping()` (*aequilibrae.paths.Graph* method), 254  
`create_compressed_link_network_mapping()` (*aequilibrae.paths.TransitGraph* method), 257  
`create_empty()` (*aequilibrae.matrix.AequilibraeMatrix* method), 246  
`create_example()` (in module *aequilibrae.utils.create\_example*), 291  
`create_from_gmns()` (*aequilibrae.project.Network* method), 219  
`create_from_omx()` (*aequilibrae.matrix.AequilibraeMatrix* method), 247  
`create_from_osm()` (*aequilibrae.project.Network* method), 219  
`create_from_trip_list()` (*aequilibrae.matrix.AequilibraeMatrix* method), 247  
`create_graph()` (*aequilibrae.transit.Transit* method), 283  
`create_graph()` (*aequilibrae.transit.TransitGraphBuilder* method), 286  
`create_line_geometry()` (*aequilibrae.transit.TransitGraphBuilder* method), 286  
`create_network()` (*aequilibrae.utils.create\_delaunay\_network.DelaunayAnalysis* method), 290  
`create_od_node_mapping()` (*aequilibrae.transit.TransitGraphBuilder* method), 286  
`create_transit_database()` (*aequilibrae.transit.Transit* method), 283  
`create_zoning_layer()` (*aequilibrae.project.Zoning* method), 222
- `data` (*aequilibrae.project.network.Links* property), 230  
`data` (*aequilibrae.project.network.Nodes* property), 232  
`data` (*aequilibrae.project.network.Periods* property), 234  
`data` (*aequilibrae.project.Zoning* property), 223
- `data_fields()` (*aequilibrae.project.network.Link* method), 236  
`data_fields()` (*aequilibrae.project.network.Node* method), 237  
`data_fields()` (*aequilibrae.project.network.Period* method), 238  
`dates_available()` (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 288  
`db_connection` (*aequilibrae.project.Project* property), 212  
`deactivate()` (*aequilibrae.project.Project* method), 212  
`default_capacities` (*aequilibrae.transit.Transit* attribute), 284  
`default_parameters` (*aequilibrae.paths.RouteChoice* attribute), 281  
`default_pces` (*aequilibrae.transit.Transit* attribute), 284  
`default_period` (*aequilibrae.project.network.Periods* property), 234  
`default_types()` (*aequilibrae.paths.Graph* method), 254  
`default_types()` (*aequilibrae.paths.TransitGraph* method), 257  
`DelaunayAnalysis` (class in *aequilibrae.utils.create\_delaunay\_network*), 290  
`delete()` (*aequilibrae.project.network.Link* method), 236  
`delete()` (*aequilibrae.project.network.Links* method), 230  
`delete()` (*aequilibrae.project.network.LinkType* method), 235  
`delete()` (*aequilibrae.project.network.LinkTypes* method), 228  
`delete()` (*aequilibrae.project.network.Modes* method), 227  
`delete()` (*aequilibrae.project.Zone* method), 224  
`delete_record()` (*aequilibrae.project.Matrices* method), 216  
`demand_index_names` (*aequilibrae.paths.RouteChoice* attribute), 281  
`disconnect_mode()` (*aequilibrae.project.Zone* method), 224  
`doWork()` (*aequilibrae.paths.NetworkSkimming* method), 252  
`doWork()` (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 289  
`drop_mode()` (*aequilibrae.project.network.Link* method), 236
- ## E
- `exclude_links()` (*aequilibrae.paths.Graph* method), 254  
`exclude_links()` (*aequilibrae.paths.TransitGraph* method), 257  
`execute()` (*aequilibrae.paths.NetworkSkimming* method), 252

- execute() (*aequilbrae.paths.OptimalStrategies* method), 275
- execute() (*aequilbrae.paths.RouteChoice* method), 277
- execute() (*aequilbrae.paths.TrafficAssignment* method), 264
- execute() (*aequilbrae.paths.TransitAssignment* method), 267
- execute\_from\_pandas() (*aequilbrae.paths.RouteChoice* method), 277
- execute\_from\_path\_files() (*aequilbrae.paths.RouteChoice* method), 277
- execute\_import() (*aequilbrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 289
- execute\_single() (*aequilbrae.paths.RouteChoice* method), 277
- export() (*aequilbrae.matrix.AequilbraeMatrix* method), 247
- export\_to\_gmns() (*aequilbrae.project.Network* method), 220
- extent() (*aequilbrae.project.Network* method), 220
- extent() (*aequilbrae.project.network.Links* method), 230
- extent() (*aequilbrae.project.network.Nodes* method), 231
- extent() (*aequilbrae.project.network.Periods* method), 233
- extent() (*aequilbrae.project.Zoning* method), 222
- ## F
- FieldEditor (*class in aequilbrae.project*), 214
- fields (*aequilbrae.project.network.Links* property), 230
- fields (*aequilbrae.project.network.LinkTypes* property), 229
- fields (*aequilbrae.project.network.Modes* property), 227
- fields (*aequilbrae.project.network.Nodes* property), 232
- fields (*aequilbrae.project.network.Periods* property), 234
- fields (*aequilbrae.project.Zoning* property), 223
- file\_default (*aequilbrae.Parameters* attribute), 292
- fit() (*aequilbrae.distribution.Ipf* method), 240
- from\_db() (*aequilbrae.transit.TransitGraphBuilder* class method), 286
- from\_path() (*aequilbrae.project.Project* class method), 212
- functions\_available() (*aequilbrae.paths.VDF* method), 261
- ## G
- get() (*aequilbrae.project.network.Links* method), 230
- get() (*aequilbrae.project.network.LinkTypes* method), 228
- get() (*aequilbrae.project.network.Modes* method), 227
- get() (*aequilbrae.project.network.Nodes* method), 231
- get() (*aequilbrae.project.network.Periods* method), 233
- get() (*aequilbrae.project.Zoning* method), 222
- get\_by\_name() (*aequilbrae.project.network.LinkTypes* method), 228
- get\_by\_name() (*aequilbrae.project.network.Modes* method), 227
- get\_closest\_zone() (*aequilbrae.project.Zoning* method), 222
- get\_graph\_to\_network\_mapping() (*aequilbrae.paths.AssignmentResults* method), 269
- get\_heuristics() (*aequilbrae.paths.PathResults* method), 273
- get\_load\_results() (*aequilbrae.paths.AssignmentResults* method), 269
- get\_load\_results() (*aequilbrae.paths.RouteChoice* method), 277
- get\_load\_results() (*aequilbrae.paths.TransitAssignmentResults* method), 270
- get\_matrix() (*aequilbrae.matrix.AequilbraeMatrix* method), 248
- get\_matrix() (*aequilbrae.project.Matrices* method), 216
- get\_record() (*aequilbrae.project.Matrices* method), 217
- get\_results() (*aequilbrae.paths.RouteChoice* method), 278
- get\_select\_link\_loading\_results() (*aequilbrae.paths.RouteChoice* method), 278
- get\_select\_link\_od\_matrix\_results() (*aequilbrae.paths.RouteChoice* method), 278
- get\_skim\_results() (*aequilbrae.paths.TrafficAssignment* method), 264
- get\_skim\_results() (*aequilbrae.paths.TransitAssignment* method), 267
- get\_sl\_results() (*aequilbrae.paths.AssignmentResults* method), 270
- get\_table() (*aequilbrae.transit.Transit* method), 283
- Graph (*class in aequilbrae.paths*), 253
- graphs (*aequilbrae.transit.Transit* attribute), 284
- GravityApplication (*class in aequilbrae.distribution*), 241
- GravityCalibration (*class in aequilbrae.distribution*), 240
- GTFSRouteSystemBuilder (*class in aequilbrae.transit.lib\_gtfs*), 287
- ## H
- HyperpathGenerating (*class in aequilbrae.paths*), 274
- ## I
- info (*aequilbrae.paths.TrafficClass* property), 260
- info (*aequilbrae.paths.TransitClass* property), 260
- info() (*aequilbrae.paths.HyperpathGenerating* method), 275
- info() (*aequilbrae.paths.RouteChoice* method), 278
- info() (*aequilbrae.paths.TrafficAssignment* method), 264

- info() (*aequilibrae.paths.TransitAssignment* method), 268  
 installation, 1  
 IpF (class in *aequilibrae.distribution*), 239  
 is\_omx() (*aequilibrae.matrix.AequilibraeMatrix* method), 248
- ## L
- Link (class in *aequilibrae.project.network*), 235  
 link\_types (*aequilibrae.project.Network* attribute), 220  
 Links (class in *aequilibrae.project.network*), 229  
 LinkType (class in *aequilibrae.project.network*), 234  
 LinkTypes (class in *aequilibrae.project.network*), 227  
 list() (*aequilibrae.project.Matrices* method), 217  
 list\_examples() (in module *aequilibrae.utils.create\_example*), 291  
 list\_fields() (*aequilibrae.project.About* method), 214  
 list\_modes() (*aequilibrae.project.Network* method), 220  
 load() (*aequilibrae.distribution.SyntheticGravityModel* method), 243  
 load() (*aequilibrae.matrix.AequilibraeMatrix* method), 248  
 load() (*aequilibrae.transit.Transit* method), 283  
 load\_date() (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 289  
 load\_from\_disk() (*aequilibrae.paths.Graph* method), 254  
 load\_from\_disk() (*aequilibrae.paths.TransitGraph* method), 257  
 Log (class in *aequilibrae.project*), 215  
 log() (*aequilibrae.project.Project* method), 212  
 log\_specification() (*aequilibrae.paths.RouteChoice* method), 278  
 log\_specification() (*aequilibrae.paths.TrafficAssignment* method), 264  
 log\_specification() (*aequilibrae.paths.TransitAssignment* method), 268  
 lonlat (*aequilibrae.project.network.Nodes* property), 232
- ## M
- map\_match() (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder* method), 289  
 Matrices (class in *aequilibrae.project*), 216  
 Mode (class in *aequilibrae.project.network*), 234  
 Modes (class in *aequilibrae.project.network*), 225  
 module  
     *aequilibrae.utils.create\_example*, 291
- ## N
- nan\_to\_num() (*aequilibrae.matrix.AequilibraeMatrix* method), 248  
 Network (class in *aequilibrae.project*), 217  
 NetworkSimplifier (class in *aequilibrae.project.tools.network\_simplifier*), 224  
 NetworkSkimming (class in *aequilibrae.paths*), 251  
 new() (*aequilibrae.project.network.Links* method), 230  
 new() (*aequilibrae.project.network.LinkTypes* method), 228  
 new() (*aequilibrae.project.network.Modes* method), 227  
 new() (*aequilibrae.project.Project* method), 212  
 new() (*aequilibrae.project.Zoning* method), 222  
 new\_centroid() (*aequilibrae.project.network.Nodes* method), 231  
 new\_gtfs\_builder() (*aequilibrae.transit.Transit* method), 283  
 new\_period() (*aequilibrae.project.network.Periods* method), 233  
 new\_record() (*aequilibrae.project.Matrices* method), 217  
 Node (class in *aequilibrae.project.network*), 236  
 Nodes (class in *aequilibrae.project.network*), 230
- ## O
- open() (*aequilibrae.project.Project* method), 212  
 OptimalStrategies (class in *aequilibrae.paths*), 275
- ## P
- parameters (*aequilibrae.project.Project* property), 212  
 Parameters (class in *aequilibrae*), 291  
 PathResults (class in *aequilibrae.paths*), 272  
 Period (class in *aequilibrae.project.network*), 238  
 Periods (class in *aequilibrae.project.network*), 232  
 post\_process() (*aequilibrae.paths.SubAreaAnalysis* method), 281  
 prepare() (*aequilibrae.paths.AssignmentResults* method), 270  
 prepare() (*aequilibrae.paths.PathResults* method), 273  
 prepare() (*aequilibrae.paths.RouteChoice* method), 278  
 prepare() (*aequilibrae.paths.SkimResults* method), 272  
 prepare() (*aequilibrae.paths.TransitAssignmentResults* method), 271  
 prepare\_graph() (*aequilibrae.paths.Graph* method), 255  
 prepare\_graph() (*aequilibrae.paths.TransitGraph* method), 257  
 Project (class in *aequilibrae.project*), 211  
 project\_parameters (*aequilibrae.project.Project* property), 212  
 protected\_fields (*aequilibrae.project.Network* attribute), 220  
 pt\_con (*aequilibrae.transit.Transit* attribute), 284
- ## R
- random\_name() (*aequilibrae.matrix.AequilibraeMatrix* static method), 249

- rebuild\_network() (aequilibrae.project.tools.network\_simplifier.NetworkSimplifier method), 225  
 refresh() (aequilibrae.project.network.Links method), 230  
 refresh() (aequilibrae.project.network.Nodes method), 232  
 refresh() (aequilibrae.project.network.Periods method), 233  
 refresh\_fields() (aequilibrae.project.network.Links method), 230  
 refresh\_fields() (aequilibrae.project.network.Nodes method), 232  
 refresh\_fields() (aequilibrae.project.network.Periods method), 233  
 refresh\_geo\_index() (aequilibrae.project.Zoning method), 222  
 reload() (aequilibrae.project.Matrices method), 217  
 remove() (aequilibrae.project.FieldEditor method), 215  
 remove() (aequilibrae.transit.TransitGraphBuilder class method), 286  
 remove\_config() (aequilibrae.transit.TransitGraphBuilder static method), 287  
 remove\_edges() (aequilibrae.transit.TransitGraphBuilder static method), 287  
 remove\_graphs() (aequilibrae.transit.Transit method), 283  
 remove\_vertices() (aequilibrae.transit.TransitGraphBuilder static method), 287  
 renumber() (aequilibrae.project.network.Node method), 238  
 renumber() (aequilibrae.project.network.Period method), 238  
 report() (aequilibrae.paths.TrafficAssignment method), 264  
 report() (aequilibrae.paths.TransitAssignment method), 268  
 req\_link\_flds (aequilibrae.project.Network attribute), 220  
 req\_node\_flds (aequilibrae.project.Network attribute), 220  
 reset() (aequilibrae.paths.AssignmentResults method), 270  
 reset() (aequilibrae.paths.PathResults method), 273  
 reset() (aequilibrae.paths.TransitAssignmentResults method), 271  
 restore\_default() (aequilibrae.Parameters method), 292  
 results() (aequilibrae.paths.TrafficAssignment method), 264  
 results() (aequilibrae.paths.TransitAssignment method), 268  
 results() (aequilibrae.paths.TransitAssignmentRouteChoice (class in aequilibrae.paths), 276  
 rows() (aequilibrae.matrix.AequilibraeMatrix method), 249  
 run (aequilibrae.project.Project property), 212  
 run() (aequilibrae.paths.HyperpathGenerating method), 275
- ## S
- save() (aequilibrae.distribution.SyntheticGravityModel method), 243  
 save() (aequilibrae.matrix.AequilibraeMatrix method), 249  
 save() (aequilibrae.project.FieldEditor method), 215  
 save() (aequilibrae.project.network.Link method), 236  
 save() (aequilibrae.project.network.Links method), 230  
 save() (aequilibrae.project.network.LinkType method), 235  
 save() (aequilibrae.project.network.LinkTypes method), 228  
 save() (aequilibrae.project.network.Mode method), 234  
 save() (aequilibrae.project.network.Node method), 238  
 save() (aequilibrae.project.network.Nodes method), 232  
 save() (aequilibrae.project.network.Period method), 238  
 save() (aequilibrae.project.network.Periods method), 233  
 save() (aequilibrae.project.Zone method), 224  
 save() (aequilibrae.project.Zoning method), 223  
 save() (aequilibrae.transit.TransitGraphBuilder method), 287  
 save\_compressed\_correspondence() (aequilibrae.paths.Graph method), 255  
 save\_compressed\_correspondence() (aequilibrae.paths.TransitGraph method), 258  
 save\_config() (aequilibrae.transit.TransitGraphBuilder method), 287  
 save\_edges() (aequilibrae.transit.TransitGraphBuilder method), 287  
 save\_graphs() (aequilibrae.transit.Transit method), 284  
 save\_link\_flows() (aequilibrae.paths.RouteChoice method), 279  
 save\_path\_files() (aequilibrae.paths.RouteChoice method), 279  
 save\_results() (aequilibrae.paths.HyperpathGenerating method), 275  
 save\_results() (aequilibrae.paths.TrafficAssignment method), 264  
 save\_results() (aequilibrae.paths.TransitAssignment method), 268  
 save\_select\_link\_flows() (aequilibrae.paths.RouteChoice method), 279  
 save\_select\_link\_flows() (aequilibrae.paths.TrafficAssignment method), 265

*save\_select\_link\_matrices()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*save\_select\_link\_results()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*save\_skims()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*save\_to\_disk()* (*aequilibrae.paths.Graph method*), 255  
*save\_to\_disk()* (*aequilibrae.paths.TransitGraph method*), 258  
*save\_to\_disk()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*save\_to\_project()* (*aequilibrae.distribution.GravityApplication method*), 243  
*save\_to\_project()* (*aequilibrae.distribution.Ipf method*), 240  
*save\_to\_project()* (*aequilibrae.paths.NetworkSkimming method*), 252  
*save\_vertices()* (*aequilibrae.transit.TransitGraphBuilder method*), 287  
*select\_link\_flows()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*set\_agency\_identifier()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_algorithm()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*set\_algorithm()* (*aequilibrae.paths.TransitAssignment method*), 268  
*set\_allow\_map\_match()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_blocked\_centroid\_flows()* (*aequilibrae.paths.Graph method*), 255  
*set\_blocked\_centroid\_flows()* (*aequilibrae.paths.TransitGraph method*), 258  
*set\_capacities()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_capacity\_field()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*set\_choice\_set\_generation()* (*aequilibrae.paths.RouteChoice method*), 279  
*set\_classes()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*set\_classes()* (*aequilibrae.paths.TransitAssignment method*), 268  
*set\_cores()* (*aequilibrae.paths.AssignmentResults method*), 270  
*set\_cores()* (*aequilibrae.paths.NetworkSkimming method*), 252  
*set\_cores()* (*aequilibrae.paths.RouteChoice method*), 280  
*set\_cores()* (*aequilibrae.paths.TrafficAssignment method*), 265  
*set\_cores()* (*aequilibrae.paths.TransitAssignment method*), 268  
*set\_cores()* (*aequilibrae.paths.TransitAssignmentResults method*), 271  
*set\_date()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_demand\_matrix\_core()* (*aequilibrae.paths.TransitClass method*), 260  
*set\_description()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_feed()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_fixed\_cost()* (*aequilibrae.paths.TrafficClass method*), 259  
*set\_frequency\_field()* (*aequilibrae.paths.TransitAssignment method*), 269  
*set\_graph()* (*aequilibrae.paths.Graph method*), 255  
*set\_graph()* (*aequilibrae.paths.TransitGraph method*), 258  
*set\_heuristic()* (*aequilibrae.paths.PathResults method*), 273  
*set\_index()* (*aequilibrae.matrix.AequilbraeMatrix method*), 250  
*set\_maximum\_speeds()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 289  
*set\_modes()* (*aequilibrae.project.network.Link method*), 236  
*set\_path\_file\_format()* (*aequilibrae.paths.TrafficAssignment method*), 266  
*set\_pce()* (*aequilibrae.paths.TrafficClass method*), 259  
*set\_pces()* (*aequilibrae.transit.lib\_gtfs.GTFSRouteSystemBuilder method*), 290  
*set\_save\_path\_files()* (*aequilibrae.paths.TrafficAssignment method*), 266  
*set\_save\_routes()* (*aequilibrae.paths.RouteChoice method*), 280  
*set\_select\_links()* (*aequilibrae.paths.RouteChoice method*), 280  
*set\_select\_links()* (*aequilibrae.paths.TrafficClass method*), 260  
*set\_skimming()* (*aequilibrae.paths.Graph method*), 255  
*set\_skimming()* (*aequilibrae.paths.TransitGraph method*), 258  
*set\_skimming\_fields()* (*aequilibrae.paths.TransitAssignment method*), 269  
*set\_time\_field()* (*aequilibrae.paths.TrafficAssignment method*), 266  
*set\_time\_field()* (*aequilibrae.paths.TransitAssignment method*), 266

- brae.paths.TransitAssignment* method), 269
  - `set_time_field()` (*aequilibrae.project.Network* method), 220
  - `set_vdf()` (*aequilibrae.paths.TrafficAssignment* method), 266
  - `set_vdf_parameters()` (*aequilibrae.paths.TrafficAssignment* method), 266
  - `set_vot()` (*aequilibrae.paths.TrafficClass* method), 260
  - `setDescription()` (*aequilibrae.matrix.AequilibraeMatrix* method), 250
  - `setName()` (*aequilibrae.matrix.AequilibraeMatrix* method), 250
  - `signal` (*aequilibrae.paths.NetworkSkimming* attribute), 252
  - `signal` (*aequilibrae.project.Network* attribute), 220
  - `signal` (*aequilibrae.project.tools.network\_simplifier.NetworkSimplifier* attribute), 225
  - `signal` (*aequilibrae.transit.lib\_gtfs.GTFSSystemBuilder* attribute), 290
  - `simplify()` (*aequilibrae.project.tools.network\_simplifier.NetworkSimplifier* method), 225
  - `skim_congested()` (*aequilibrae.paths.TrafficAssignment* method), 266
  - `skim_congested()` (*aequilibrae.paths.TrafficClass* method), 260
  - `skimmable_fields()` (*aequilibrae.project.Network* method), 220
  - `SkimResults` (class in *aequilibrae.paths*), 271
  - `sql` (*aequilibrae.project.network.Links* attribute), 230
  - `sql` (*aequilibrae.project.network.Nodes* attribute), 232
  - `sql` (*aequilibrae.project.network.Periods* attribute), 234
  - `SubAreaAnalysis` (class in *aequilibrae.paths*), 281
  - `SyntheticGravityModel` (class in *aequilibrae.distribution*), 243
- T**
- `to_transit_graph()` (*aequilibrae.transit.TransitGraphBuilder* method), 287
  - `total_flows()` (*aequilibrae.paths.AssignmentResults* method), 270
  - `TrafficAssignment` (class in *aequilibrae.paths*), 261
  - `TrafficClass` (class in *aequilibrae.paths*), 258
  - `transit` (*aequilibrae.transit.Transit* attribute), 284
  - `Transit` (class in *aequilibrae.transit*), 282
  - `TransitAssignment` (class in *aequilibrae.paths*), 267
  - `TransitAssignmentResults` (class in *aequilibrae.paths*), 270
  - `TransitClass` (class in *aequilibrae.paths*), 260
  - `TransitGraph` (class in *aequilibrae.paths*), 255
  - `TransitGraphBuilder` (class in *aequilibrae.transit*), 284
- U**
- `update_database()` (*aequilibrae.project.Matrices* method), 217
  - `update_trace()` (*aequilibrae.paths.PathResults* method), 273
  - `upgrade()` (*aequilibrae.project.Project* method), 212
- V**
- `VDF` (class in *aequilibrae.paths*), 261
- W**
- `write_back()` (*aequilibrae.Parameters* method), 292
  - `write_back()` (*aequilibrae.project.About* method), 214
- Z**
- `Zone` (class in *aequilibrae.project*), 223
  - `zoning` (*aequilibrae.project.Project* property), 213
  - `Zoning` (class in *aequilibrae.project*), 220